


THREE PHASE SCR RECTIFIER REGULATOR OPERATION MANUAL TYPE

DRP-6



DRP-6+6

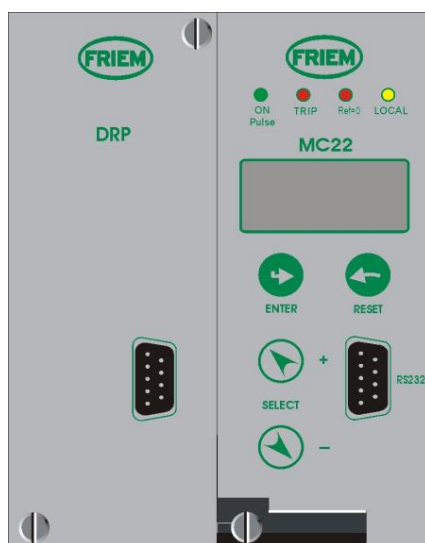

1. GENERAL UTILIZATION AND COMMISSIONING DIRECTIONS	4
1.1 - Storage and Transportation	4
1.2 - Installation	4
1.3 - Electrical Connection	4
1.4 - Measuring Inputs and Power Supply	4
1.5 - Outputs Loading	4
1.6 - Protection Earthing	4
1.7 - Setting and Calibration	4
1.8 - Safety Protection	4
1.9 - Handling	4
1.10 - Maintenance	5
1.11 - Waste Disposal of Electrical & Electronic Equipment	5
2. GENERAL CHARACTERISTICS	6
2.1 - Power Supply	6
2.2 - Operation and Algorithms	7
2.2.1 - Reference Input Values	7
2.2.2 - Signals Input	8
2.2.3 - Signals Output	9
2.2.2 - Input quantities	11
2.2.2.1 - Mains Frequency (Freq)	11
2.2.2.2 - Algorithm of the time current curves	11
2.2.3 - Time Current Curves IEC	12
2.2.4 - Functions and Settings (Function)	13
2.2.4.1 - 1I> (1F51) - First overcurrent protection level (MC22)	13
2.2.4.2 - 2I> (2F51) - Second overcurrent protection level (MC22)	13
2.2.4.3 - 3I> (3F51) - Third overcurrent protection level (DRP)	14
2.2.4.6 - U> (F59) - Overvoltage element (MC22)	15
2.2.4.7 - U< (F27) - Undervoltage element (MC22)	15
2.2.4.8 - U2> (F46) - Phase Sequence(MC22)	16
2.2.4.9 - PID-V - (Setting) (MC22)	17
2.2.4.10 - PID-I - (Setting) (MC22)	18
2.2.4.11 - Step - (Regulation step handle) (MC22)	19
2.2.3.12 - Fan - (FAN ON) (MC22)	20
2.2.4.12 - Test - (Test) (MC22)	20
2.2.4.13 - Osc - Oscillographic Recording (MC22)	21
2.2.4.14 - LoadP - Load Profile (MC22)	22
2.2.4.15 - I.R.F. - Internal Relay Failure (MC22)	22
2.2.4.16 - LCD - Display and Buzzer operation (MC22)	22
2.2.4.17 - Comm - Communication Parameters (MC22)	23
2.2.4.17 - I< - Output current = 0 (Hidden Parameters - Reserved for service installation) (DRP)	23
2.2.4.17 - Ass - Lack of pulse (Hidden Parameters - Reserved for service installation)	24
2.2.4.17 - OpMd - Operation Mode (Hidden Parameters - Reserved for service installation)	24
2.2.4.17 - DCBSC - DC Bus Short circuit (Hidden Parameters - Reserved for service installation) (DRP)	24
2.2.4.17 - VFB> - V Feedback overvoltage (Hidden Parameters - Reserved for service installation) (DRP)	25
2.2.4.17 - VFB< - V Feedback undervoltage (Hidden Parameters - Reserved for service installation) (DRP)	25
4. OUTPUT RELAYS	26
5. DIGITAL INPUT	27
6. SELF DIAGNOSTIC	28
7. REGULATOR MANAGEMENT	29
8. SIGNALIZATIONS	30
9. KEYBOARD	30
10. Serial Communication Port	31
10.1 - Main RS485 Serial Communication Port (MC22)	31
10.2 - Communication Port on Front Face Panel - MC22 & DRP	31
9.3 - Termination resistor	32
11. MENU AND VARIABLES	33
11.1 - Real Time Measurements	33
11.2 - Measure (Instantaneous Measurements)	33
11.3 - Counter (Operation Counters)	34
11.4 - LastTrip (Event Recording)	35
11.5 - R/W Set (Programming / Reading the Relay Settings)	36
11.5.1 - CommAdd (Communication Address)	36
11.5.2 - Time/Date (Time/Date)	36
11.5.3 - RatedVal (Rated Input Values)	36
11.5.4 - Function (Functions)	37
11.6 - RelayCfg (Relay Configuration)	40
11.7 - Commands	42
11.8 - Info&Ver	42
12. KEYBOARD OPERATIONAL DIAGRAM	43
13. PASSWORD	45
13.1 - MS-Com Password	45

14. MAINTENANCE	45
15. POWER FREQUENCY INSULATION TEST	45
16. DRP-6 - WIRING DIAGRAM	46
16.1 – DRP-6+6 - WIRING DIAGRAM	47
17. DRP-6 - OVERALL DIMENSIONS (mm)	48
16.1 – DRP-6+6 – Overall Dimensions (mm)	49
18. DIRECTION FOR PCB'S DRAW-OUT AND PLUG-IN	50
18.1 - Draw-Out	50
18.2 - Plug-In	50
19. ELECTRICAL CHARACTERISTICS	51

1. GENERAL UTILIZATION AND COMMISSIONING DIRECTIONS

Always make reference to the specific description of the product and to the Manufacturer's instruction. Carefully observe the following warnings.

1.1 - Storage and Transportation

must comply with the environmental conditions stated on the product's instruction or by the applicable IEC standards.

1.2 - Installation

must be properly made and in compliance with the operational ambient conditions stated by the Manufacturer.

1.3 - Electrical Connection

must be made strictly according to the wiring diagram supplied with the Product, to its electrical characteristics and in compliance with the applicable standards particularly with reference to human safety.

1.4 - Measuring Inputs and Power Supply

carefully check that the value of input quantities and power supply voltage are proper and within the permissible variation limits.

1.5 - Outputs Loading

must be compatible with their declared performance.

1.6 - Protection Earthing

When earthing is required, carefully check its effectiveness.

1.7 - Setting and Calibration

Carefully check the proper setting of the different functions according to the configuration of the protected system, the safety regulations and the co-ordination with other equipment.

1.8 - Safety Protection

Carefully check that all safety means are correctly mounted, apply proper seals where required and periodically check their integrity.

1.9 - Handling

Notwithstanding the highest practicable protection means used in designing electronic circuits, the electronic components and semiconductor devices mounted on the modules can be seriously damaged by electrostatic voltage discharge which can be experienced when handling the modules. The damage caused by electrostatic discharge may not be immediately apparent but the design reliability and the long life of the product will have been reduced. The electronic circuits reduced by are completely safe from electrostatic discharge (8 KV IEC 255.22.2) when housed in their case; withdrawing the modules without proper cautions expose them to the risk of damage.

- a. Before removing a module, ensure that you are at the same electrostatic potential as the equipment by touching the case.
- b. Handle the module by its front-plate, frame, or edges of the printed circuit board. Avoid touching the electronic components, printed circuit tracks or connectors.
- c. Do not pass the module to any person without first ensuring that you are both at the same electrostatic potential. Shaking hands achieves equipotential.
- d. Place the module on an antistatic surface, or on a conducting surface which is at the same potential as yourself.
- e. Store or transport the module in a conductive bag.

More information on safe working procedures for all electronic equipment can be found in BS5783 and IEC 147-OF.

1.10 - Maintenance

Make reference to the instruction manual of the Manufacturer ; maintenance must be carried-out by specially trained people and in strict conformity with the safety regulations.

1.11 - Waste Disposal of Electrical & Electronic Equipment

(Applicable throughout the European Union and other European countries with separate collection program).

This product should not be treated as household waste when you wish dispose of it. Instead, it should be handed over to an applicable collection point for the recycling of electrical and electronic equipment. By ensuring this product is disposed of correctly, you will help prevent potential negative consequence to the environment and human health, which could otherwise be caused by inappropriate disposal of this product. The recycling of materials will help to conserve natural resource.

2. GENERAL CHARACTERISTICS

Compact draw-out execution for Flush Mounting.

User friendly front face with 2x8 characters LCD Display, four signal Leds, four keys for complete local management and 9-pin socket for local RS232 serial communication.

3 user programmable Output Relays.

5 optoisolated Digital Inputs.

RS485 communication port (independent from the RS232 port on front panel)

The device is made for control three phase SCR Rectifier Regulator.

The output current can be regulate with high accuracy trough a PID algorithm.

Make electric connection in conformity with the diagram reported on relay's enclosure.

2.1 - Power Supply

The auxiliary power is supplied by a built-in module fully isolated an self protected.

Two options are available:

a) - { 24V(-20%) / 110V(+15%) a.c.
24V(-20%) / 125V(+20%) d.c.

b) - { 80V(-20%) / 220V(+15%) a.c.
90V(-20%) / 250V(+20%) d.c.

Before energising the unit check that supply voltage is within the allowed limits.

2.2 - Operation and Algorithms

2.2.1 - Reference Input Values

Display	Description	Setting Range	Step	Unit
I1 1000 A	Rated Primary current of phase C.T.	1 - 9999	1	A
I2 5 A	Rated Secondary current of phase C.T.	1 - 5	1/5	A
In 1000 A	Reference primary current of the relay	1 - 9999	1	A
V1 10 kV	Rated Primary voltage of phase V.T.	0.05 - 500	0.01	kV
V2 500 V	Rated Secondary voltage of phase V.T.	50 - 115	0.01	V
Freq 50 Hz	System rated frequency	50 - 60	10	Hz

Hidden Parameters (reserved for service installation)						
Note: The nominal parameter of the transducers connected to the regulator must be set via dedicated serial port available on DRP board.						
IN2 1000 V	"V" Ref. Primary value Transducer	0 - 9999	1	V		
IN2 20 mA	"V" Ref. Secondary value Transducer	0 - 9999	1	mA		
IN2 0 V	"V" Ref. Primary Start scale	0 - 9999	1	V		
IN2 0 mA	"V" Ref. Secondary Start scale	0 - 9999	1	mA		
IN2 20 mA	"V" Ref. Input end scale DRP	0 - 9999	1	mA		
IN3 2500 A	"I" Ref. Primary value Transducer	0 - 9999	1	A		
IN3 20 mA	"I" Ref. Secondary value Transducer	0 - 9999	1	mA		
IN3 0 A	"I" Ref. Primary Start scale	0 - 9999	1	A		
IN3 0 mA	"I" Ref. Secondary Start scale	0 - 9999	1	mA		
IN3 20 mA	"I" Ref. Input end scale DRP	0 - 9999	1	mA		
IN4 2500 A	"I" Fdb. Primary value Transducer	0 - 9999	1	A		
IN4 4 V	"I" Fdb. Secondary value Transducer	0 - 999.9	0.1	V		
IN4 0 A	"I" Fdb. Primary Start scale	0 - 9999	1	A		
IN4 0 V	"I" Fdb. Secondary Start scale	0 - 999.9	0.1	V		
IN4 15 V	"I" Ref. Input end scale DRP	0 - 999.9	0.1	V		
IN4 2500 A	"I" Fdb. Base value	0 - 9999	1	A		
IN6 1000 V	"I" Fdb. Primary value Transducer	0 - 9999	1	V		
IN6 50 mA	"I" Fdb. Secondary value Transducer	0 - 9999	1	mA		
IN6 0 V	"I" Fdb. Primary Start scale	0 - 9999	1	V		
IN6 0 mA	"I" Fdb. Secondary Start scale	0 - 9999	1	mA		
IN6 60 mA	"I" Ref. Input end scale DRP	0 - 9999	1	mA		
IN6 1000 V	"I" Fdb. Base value	0 - 9999	1	V		

2.2.2 - Signals Input

Signals Input - MC22 (Board 0)			
Current 1	(terminals 4 – 5)	Input Current 1	See § Wiring Diagram
Current 2	(terminals 4 – 6)	Input Current 2	
Voltage R	(terminals 7)	Input Voltage R	
Voltage S	(terminals 8)	Input Voltage S	
Voltage T	(terminals 9)	Input Voltage T	

Signals Input – DRP-6 (Board 1)			
R	(terminals 159)	Synch. reference input	See § Wiring Diagram
S	(terminals 169)	Synch. reference input	
Ref. V	(terminals 158)	+	
	(terminals 157)	-	
Ref. I	(terminals 168)	+	
	(terminals 167)	-	
Lem / Rogowsky	(terminals 176)	+	
Rogowsky / Lem	(terminals 175)	+	
Shunt / Voltage Conv	(terminals 174)	+	
Shunt	(terminals 156)	+	
Lem / Rogowsky	(terminals 155)	+	
Rogowsky / Lem	(terminals 154)	+	
Com In	(terminals 187)	-	

Signals Input – DRP-6 (Board 2) (Only for DRP-6+6 version)			
R	(terminals 259)	Synch. reference input	See § Wiring Diagram
S	(terminals 269)	Synch. reference input	


2.2.3 - Signals Output

Signals Output - MC22

R1	(terminals 17 - 16)	Lack of Pulse	
R2	(terminals 17 - 18)	Fan	
R3	(terminals 14 - 5)	Protection Trip	

Signals Output – DRP-6 (Board 1)

R-A	(terminals 186)	Output THY4	
R-B	(terminals 185)	Output THY1	
R-COM	(terminals 184)	Common	
S-A	(terminals 166)	Output THY6	
S-B	(terminals 165)	Output THY3	
S-COM	(terminals 164)	Common	
T-A	(terminals 183)	Output THY2	
T-B	(terminals 182)	Output THY5	
T-COM	(terminals 163)	Common	

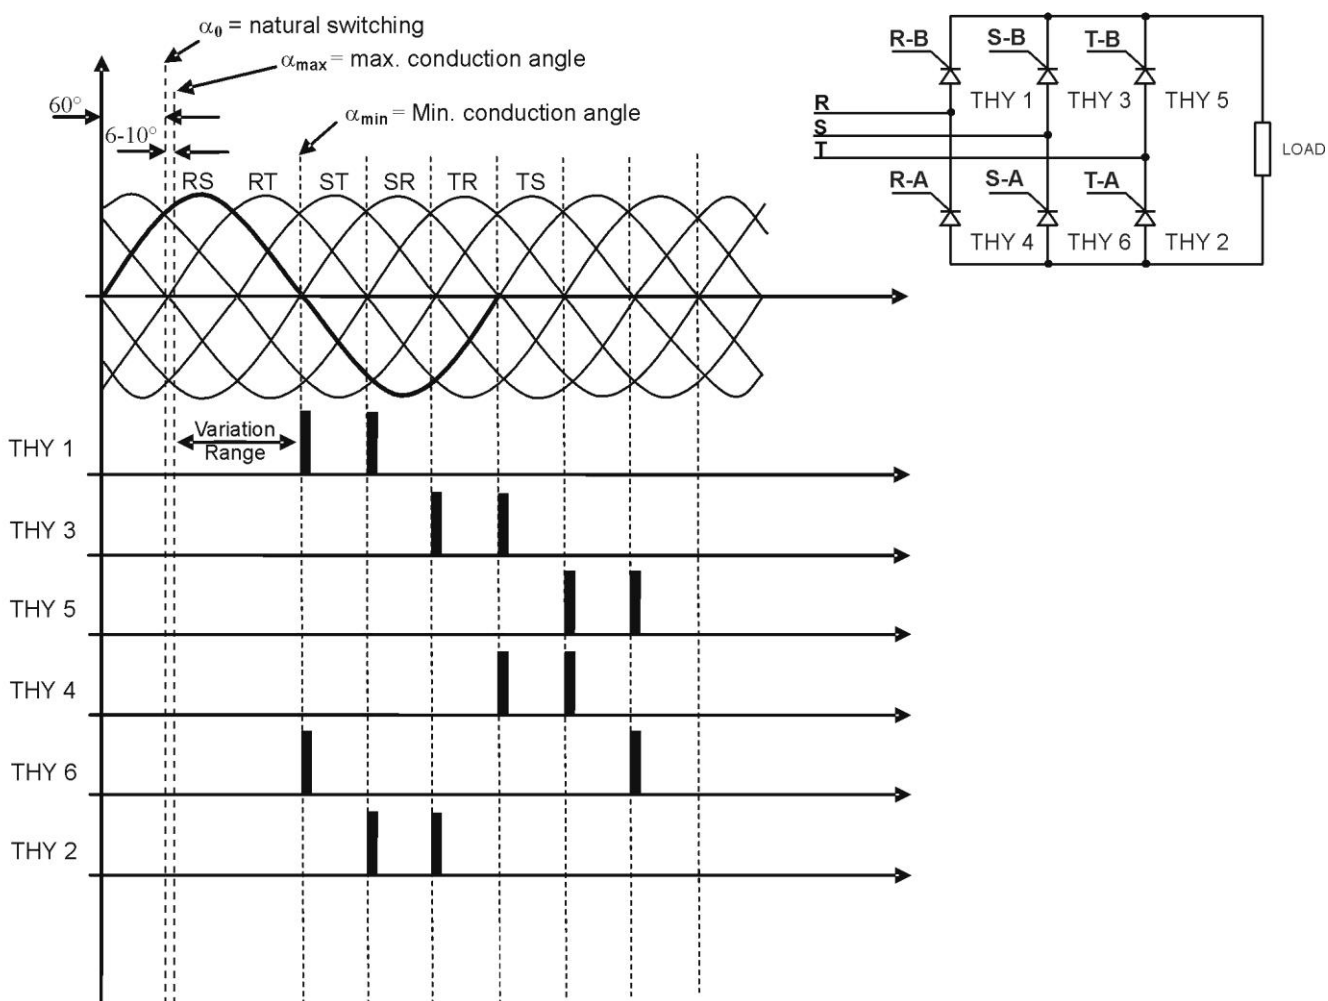

Signals Output – DRP-6 (Board 2) (Only for DRP-6+6 version)		
R-A	(terminals 286)	Output THY4
R-B	(terminals 285)	Output THY1
R-COM	(terminals 284)	Common
S-A	(terminals 266)	Output THY6
S-B	(terminals 265)	Output THY3
S-COM	(terminals 264)	Common
T-A	(terminals 283)	Output THY2
T-B	(terminals 282)	Output THY5
T-COM	(terminals 263)	Common

2.2.2 - Input quantities

2.2.2.1 - Mains Frequency (Freq)

The relay can operate either in 50Hz or 60Hz systems.
The rated Mains Frequency “ Freq “ must be set accordingly.

2.2.2.2 - Algorithm of the time current curves

The Time Current Curves are generally calculated with the following equation :

$$(1) \quad t(I) = \left[\frac{A}{\left(\frac{I}{I_s} \right)^a - 1} + B \right] \cdot K \cdot T_s + t_r$$

where :

$t(I)$ = Actual trip time delay when the input current equals “I”

I = Maximum of the three input currents.

I_s = Set minimum pick-up level

$$K = \left(\frac{A}{2^a - 1} \right)^{-1}$$

T_s = Set time delay : $t(I) = T_s$ when $\frac{I}{I_s} = 2$


t_r = Operation time of the output relay on pick-up.

The parameters “A” and “a” have different values for the different Time Current Curves.

Curve Name	Curve Identifier	A	B	a
IEC A Inverse	A	0.14	0	0.02
IEC B Very Inverse	B	13.5	0	1
IEC C Extremely Inverse	C	80	0	2

The maximum measuring current is “3xIn” for phase elements.

2.2.3 - Time Current Curves IEC

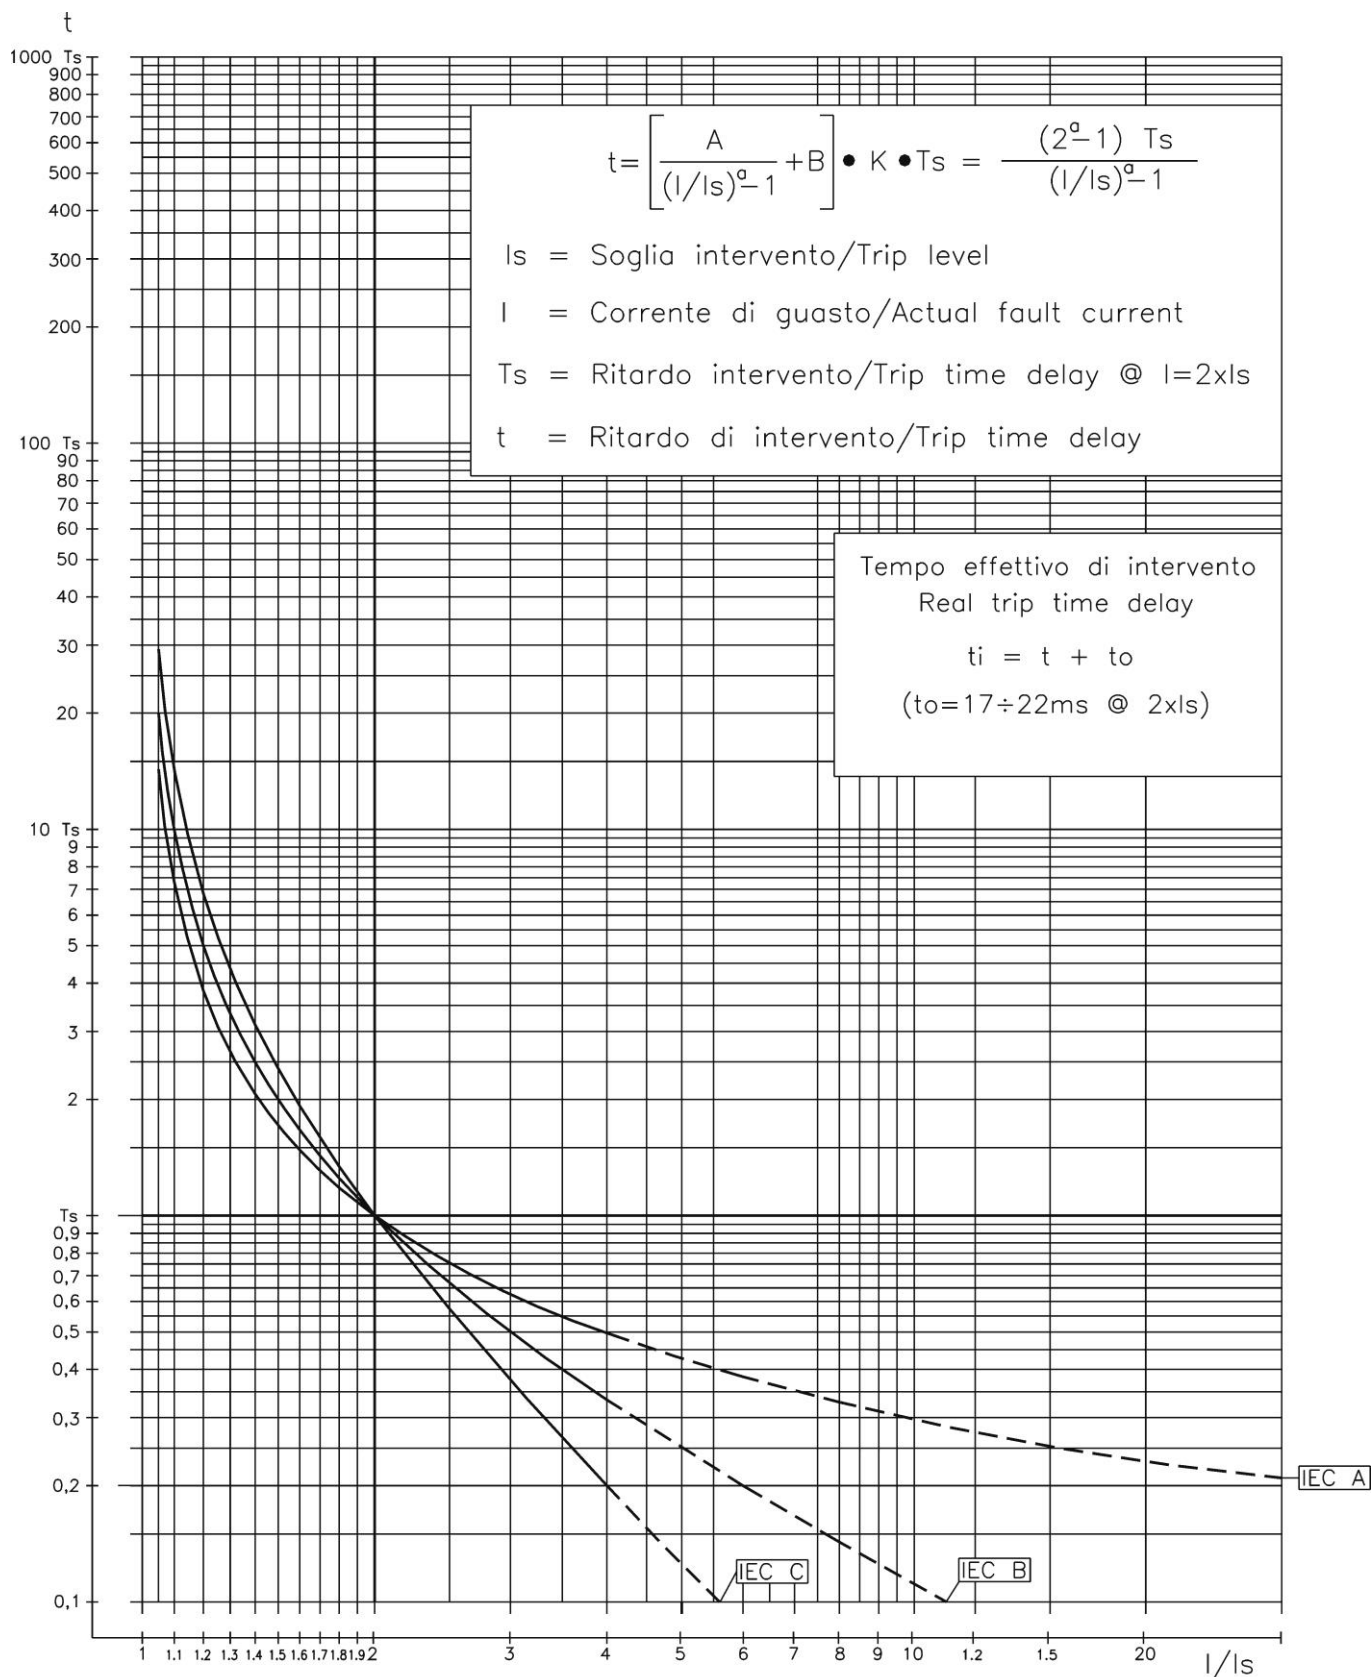

Curve Type	A	B	K	a
IEC A	0.14	0	0.336632	0.02
IEC B	13.5	0	0.666667	1
IEC C	80	0	1.2375	2

 Max. "I" Phase = $3 \times I_n$

2.2.4 - Functions and Settings (**Function**)

2.2.4.1 - **1I>** (**1F51**) - First overcurrent protection level (MC22)

FuncEnab	→	Disable	[Disable / Enable]
Options	→	TCC D	[D / A / B / C]
TripLev	→	1I> 1.5	In (0.10 ÷ 2.00) step 0.01 In
Timers	→	t1I> 60	s (0.01 ÷ 60.00) step 0.01 s

☐ **FuncEnab** : If disable the function is deactivated

☐ **TCC** : Time current curves
 D = Independent Definite Time
 A = IEC A Inverse
 B = IEC B Very Inverse
 C = IEC C Extremely Inverse

☐ **1I>** : Minimum phase current pick-up level

☐ **t1I>** : Trip time delay

Trip when : Level "1I>" exceeded for time "t1I>"

When the function is tripped : *Regulator* = Is Blocked
 Signalization = Led "Trip" is illuminated
 Last Trip = Is recorded

Reset when : Returns in normal condition

2.2.4.2 - **2I>** (**2F51**) - Second overcurrent protection level (MC22)

FuncEnab	→	Disable	[Disable / Enable]
Options	→	No Param	No Parameters
TripLev	→	2I> 1.75	In (0.10 ÷ 3.00) step 0.01 In
Timers	→	t2I> 5.00	s (0.05 ÷ 60.00) step 0.01 s

☐ **FuncEnab** : If disable the function is deactivated

☐ **2I>** : Minimum phase current pick-up level

☐ **t2I>** : Trip time delay

Trip when : Level "2I>" exceeded for time "t2I>"

When the function is tripped : *Regulator* = Is Blocked
 Signalization = Led "Trip" is illuminated
 Last Trip = Is recorded

Reset when : Returns in normal condition

2.2.4.3 - 3I> (3F51) - Third overcurrent protection level (DRP)

FuncEnab	→	No Param	No Parameters
Options	→	No Param	No Parameters
TripLev	→ 3I>	2.00	In (1.00 ÷ 3.00) step 0.01 In
Timers	→ t3I>	0.00	s (0.00 ÷ 60.00) step 0.01 s

- ☐ **FuncEnab** : If disable the function is disactivated
- ☐ **3I>** : Minimum phase current pick-up level
- ☐ **t3I>** : Trip time delay

Trip when : Level “3I>” exceeded for time “t3I>”

When the function is tripped :

<i>Regulator</i>	=	Is Blocked
<i>Signalization</i>	=	Led “Trip” is illuminated
<i>Last Trip</i>	=	Is recorded

Reset when : Returns in normal condition

2.2.4.6 - U> (F59) – Overvoltage element (MC22)

FuncEnab	→	Disable	[Disable / Enable]
Options	→	No Param	No Parameters
TripLev	→ U>	1.20	Un (0.70 ÷ 1.50) step 0.1 Un
Timers	→ tU>	3.00	s (0.01 ÷ 600) step 0.01 s

☐ **FuncEnab** : If disable the function is deactivated

☐ **U>** : Trip level protection

☐ **tU>** : Trip time delay

Trip when : Level “U>” exceeded for time “tU>”

When the function is tripped : *Signalization* = Led “Trip” is illuminated
Last Trip = Is recorded

Reset when : Returns in normal condition

2.2.4.7 - U< (F27) – Undervoltage element (MC22)

FuncEnab	→	Disable	[Disable / Enable]
Options	→	No Param	No Parameters
TripLev	→ U<	0.80	Un (0.80 ÷ 1.10) step 0.1 Un
Timers	→ tU<	0.03	s (0.01 ÷ 600) step 0.01 s

☐ **FuncEnab** : If disable the function is deactivated

☐ **U<** : Trip level protection

☐ **tU<** : Trip time delay

Trip when : Level “U<” exceeded for time “tU<”

When the function is tripped : *Signalization* = Led “Trip” is illuminated
Last Trip = Is recorded

Reset when : Returns in normal condition

2.2.4.8 - U2> (F46) – Phase Sequence(MC22)

FuncEnab	→	Disable	[Disable / Enable]
Options	→	No Param	No Parameters
TripLev	→ U2>	0.20	Un (0.20 ÷ 1.00) step 0.1 Un
Timers	→ tU2>	0.10	s (0.01 ÷ 600) step 0.01 s

- ☐ **FuncEnab** : If disable the function is deactivated
- ☐ **U2>** : Trip level protection
- ☐ **tU2>** : Trip time delay

Trip when : Level “U2>” exceeded for time “tU2>”

When the function is tripped : **Signalization** = Led “Trip” is illuminated
Last Trip = Is recorded

Reset when : Returns in normal condition

FuncEnab	→	No Param	No Parameters					
Options	→	S/F	Field	[SCADA / Field]				
TripLev	→	K_P	1.00	(0.00 ÷ 200)	step	0.01		
	→	K_I	1.00	(0.00 ÷ 99.99)	step	0.01		
	→	K_D	0.00	(0.00 ÷ 99.99)	step	0.01		
Timers	→	rRmpV	5.00	s	(0.08 ÷ 100)	step	0.01	s
	→	fRmpV	0.10	s	(0.01 ÷ 0.10)	step	0.01	s

- | | | | | | | | | | | | | |
|----------------|---------|-------------------|----------|--------------------|------|-------------------|------|----------|------|-----------|----|-----------|
| Copyright 2007 | FW.MC22 | 781.30.1.x | FW.DRP-6 | 821.01.02.x | Date | 31.07.2007 | Rev. | 0 | Pag. | 17 | of | 51 |
|----------------|---------|-------------------|----------|--------------------|------|-------------------|------|----------|------|-----------|----|-----------|

2.2.4.10 – PID-I – (Setting) (MC22)

FuncEnab	→	No Param	No Parameters
Options	→	S/F Field	[SCADA / Field]
TripLev	→	K_P 1.00	(0.00 ÷ 200) step 0.01
	→	K_I 1.00	(0.00 ÷ 99.99) step 0.01
	→	K_D 0.00	(0.00 ÷ 99.99) step 0.01
Timers	→	rRmpV 5.00	s (0.08 ÷ 100) step 0.01 s
	→	fRmpV 0.10	s (0.01 ÷ 0.10) step 0.01 s

☐ **S/F** : [SCADA] = Reference from SCADA
[Field] = Reference from FIELD

☐ **K_P** : Proportional gain

☐ **K_I** : Integrative gain

☐ **K_D** : Derivative gain

☐ **rRmpV** : Rise time voltage ramp

☐ **fRmpV** : Fall time voltage ramp

Hidden Parameters (reserved for service installation)

	→	Idc/IFB Step 1	[Direct Current Idc / I Feedback Inp.4 IFB]
--	---	-----------------------	---

☐ **Idc/IFB** : Selection of current feedback:
Direct Current Idc : from Idc (see § Measures)
I Feedback Inp.4 IFB : from input 4 IFB

2.2.4.11 – Step – (Regulation step handle) (MC22)

FuncEnab	→	Disable	[Disable / Enable]				
Options	→	QFL	NoIFR	[NoIFR / IFR]			
TripLev	→	s2s1	0.80	Vn	(0.00 ÷ 2.00)	step	0.01 Vn
	→	s1s2	0.70	Vn	(0.00 ÷ 2.00)	step	0.01 Vn
	→	s3s2	0.50	Vn	(0.00 ÷ 2.00)	step	0.01 Vn
	→	s2s3	0.40	Vn	(0.00 ÷ 2.00)	step	0.01 Vn
Timers	→	ts2s1	5.00	s	(0.00 ÷ 120.00)	step	1 s
	→	ts1s2	5.00	s	(0.00 ÷ 120.00)	step	1 s
	→	ts3s2	10.00	s	(0.00 ÷ 120.00)	step	1 s
	→	ts2s3	10.00	s	(0.00 ÷ 120.00)	step	1 s
	→	tQOp	2.00	s	(0.10 ÷ 10.00)	step	0.1 s
	→	tQCL	2.00	s	(0.10 ÷ 10.00)	step	0.1 s

☐	FuncEnab	:	If disable the function is deactivated
☐	QFL	:	Q1-Q4 behavior on failure
☐	s2s1	:	Step 2 to Step 1 Level to rising Voltage
☐	s1s2	:	Step 1 to Step 2 Level to descend Voltage
☐	s3s2	:	Step 3 to Step 2 Level to rising Voltage
☐	s2s3	:	Step 2 to Step 3 Level to descend Voltage
☐	ts2s1	:	Start time Step 2 to Step 1 Level to rising Voltage
☐	ts1s2	:	Start time Step 1 to Step 2 Level to descend Voltage
☐	ts3s2	:	Start time Step 3 to Step 2 Level to rising Voltage
☐	ts2s3	:	Start time Step 2 to Step 3 Level to descend Voltage
☐	tQOp	:	Control time Open command Q1(Q4)
☐	tQCL	:	Control time Close command Q1 (Q4)

Hidden Parameters (reserved for service installation)

→	Q1-Q4 (default) init step	Step 1	[Step 1 / Step 2 / Step 3]
→	Q1-Q4 behavior on failure		[Dont cause internal relay fault / cause internal relay fault]
→	Q1-Q4 command behavior		[Exit on correct Q1(4) position / Wait control time expiration]

2.2.3.12 - Fan - (FAN ON) (MC22)

FuncEnab	→	Disable	[Disable / Enable]
Options	→	No Param	No Parameters
TripLev	→	No Param	No Parameters
Timers	→	tFan 60.00	s (60 ÷ 600) step 10 s

- ☐ **FuncEnab** : If disable the function is deactivated
- ☐ **tFan** : Time for turn-off fan after stop command

This function command the start of the FAN each time the regulator is started and the stop of the FAN that is delayed of the time “tFan” after the regulator is stopped.

2.2.4.12 - Test - (Test) (MC22)

FuncEnab	→	No Param	No Parameters
Options	→	Tst Disable	[Disable / Ref. / TrigAng]
TripLev	→	L_Rifl 0.00	% (0.00 ÷ 100.00) step 1 %
	→	L_RifV 0.00	% (0.00 ÷ 100.00) step 1 %
	→	Ang.T 0.00	dg (0.00 ÷ 359.99) step 0.01 dg
Timers	→	No Param	No Parameters

- ☐ **Tst** (Test Mode) : **Disable** : In this case the “Test” is disabled and apparatus work normally, receiving the signal reference via serial communication from the field.
- Rif** : In this case the regulator ignore the reference from the field (serial communication); the value of reference can be adjusted through keyboard of the relay or via serial communication (MSCom2) setting the parameter “L_Rif”.
- TrigAng** : In this case the regulator ignore the reference and the feedback from the field; and regulated and output pulse are generated according to the value of the parameter “TrigAng”, adjusted through keyboard of the relay or via serial communication (MSCom2).

- ☐ **L_Rifl** : Current Local reference
- ☐ **L_RifV** : Voltage Local reference
- ☐ **Ang.T** : Arbitrary angle Test

2.2.4.13 - Osc - Oscillographic Recording (MC22)

FuncEnab	→	Disable	[Disable / Enable]
Options	→	Trg Trip	[Disable / Start / Trip / Ext.Inp. / DRPStar]
TripLev	→	No Param	No Parameters
Timers	→	tPre 5.00	s (5.00 ÷ 15.00) step 1 s
	→	tPost 10.00	s (10.00 ÷ 55.00) step 0.1 s

- ☐ **FuncEnab** : If disable the function is deactivated
- ☐ **Trg** :
 - Disable* = Function Disable (no recording)
 - Start.* = Trigger on time start of protection functions
 - Trip* = Trigger on trip (time delay end) of protection functions
 - Ext.Inp.* = Trigger when the Digital Input D3 (dry contact) is closed
 - DRPStar* = Trigger on regulator start
- ☐ **tPre** : Recording time before Trigger
- ☐ **tPost** : Recording time after Trigger

The “Osc” Function includes the wave Form Capture of the output quantities (I, V) and can totally store a record of 60 seconds.

The number of events recorded depends on the duration of each individual recording (tPre + tPost). In any case the number of event stored can not exceed ten (4 x 15 sec).

Any new event beyond the 60 sec capacity of the memory, cancel and overwrites the former records (FIFO Memory).

2.2.4.14 - **LoadP** – Load Profile (MC22)

FuncEnab	→	Disable	[Disable / Enable]
Options	→	No Param	No Parameters
TripLev	→	No Param	No Parameters
Timers	→	tLP 1.00 m	(1.00 ÷ 650) step 1 m

- ☐ **FuncEnab** : If disable the function is deactivated
- ☐ **tLP** : Scan time

Every time that comes measured a value of current (> 2%) comes activated with a time of programmable scansion “tLP”, the recording of the load profile.

2.2.4.15 - **I.R.F.** - Internal Relay Failure (MC22)

FuncEnab	→	No Param	No Parameters
Options	→	Opz NoTrip	[NoTrip / Trip]
TripLev	→	No Param	No Parameters
Timers	→	No Param	No Parameters

- ☐ **Opz** : The variable “Opz” can be programmed to trip the output relays same as the other protection functions (Opz = TRIP), or to only operate the “IRF” signal led without tripping the output relays (Opz = NoTRIP).

2.2.4.16 - **LCD** – Display and Buzzer operation (MC22)

FuncEnab	→	No Param	No Parameters
Options	→	Key BeepON	[BeepOFF / BeepON]
	→	BkL Auto	[Auto / On]
TripLev	→	No Param	No Parameters
Timers	→	No Param	No Parameters

- ☐ **Key** : Buzzer “Beep” on operation of Keyboard buttons.
- ☐ **BkL** : LCD Backlight continuously “ON” or switched-on Automatically on operation of Keyboard buttons.

2.2.4.17 - **Comm** – Communication Parameters (MC22)

FuncEnab	→	No Param	No Parameters
Options	→ LBd	9600	[9600 / 19200 / 38400 / 57600]
	→ RBd	9600	[9600 / 19200]
	→ Mod	8,n,1	[8,n,1 / 8,o,1 / 8,e,1]
	→ RPr	Modbus	[Modbus]
TripLev	→	No Param	No Parameters
Timers	→	No Param	No Parameters

- ☐ **LBd** : Local Baud Rate (Front panel RS232 communication speed)
- ☐ **RBd** : Remote Baud Rate
(Rear panel terminal blocks RS485 communication speed)
- ☐ **Mod** : Remote mode (communication parameters)
Note: Any change of this setting becomes valid at the next power on
- ☐ **RPr** : Remote Protocol

2.2.4.17 – **I<** – Output current = 0 (Hidden Parameters - Reserved for service installation) (DRP)

FuncEnab	→	No Param	No Parameters
Options	→	No Param	No Parameters
TripLev	→ I<	0.03	In (0.03 ÷ 1.00) step 0.01 In
Timers	→ tl<	0.05	s (0.05 ÷ 40.00) step 0.01 s

- ☐ **I<** : Level for current zero
- ☐ **tl<** : Trip time delay

When the function is tripped : *Signalization* = Via serial communication or output relay

Reset when : Returns in normal condition

2.2.4.17 – Ass – Lack of pulse (Hidden Parameters - Reserved for service installation)

FuncEnab	→	No Param	No Parameters
Options	→	No Param	No Parameters
TripLev	→	NotU	Reserved
Timers	→	No Param	No Parameters

When the function is tripped : Signalization = Led "Trip" is illuminated and displayed "Ass" on display.

Reset when : Returns in normal condition

2.2.4.17 – OpMd – Operation Mode (Hidden Parameters - Reserved for service installation)

Options	→	OpMd	Master Mode	[Master Mode DRP6 / Master/Slave Mode DRP6+6]
	→	Idc	5	(1 ÷ 10)
	→	IFB	5	(1 ÷ 10)
	→	VFB	5	(1 ÷ 10)
Timers	→	tVca	0.2	s (0.00 ÷ 2.00) step 0.01 s

- ☐ **OpMd** : Operative Mode
- ☐ **Idc** : Number of Average of Idc
- ☐ **IFB** : Number of Average of IFB
- ☐ **VFB** : Number of Average of VFB
- ☐ **tVca** : Trip time delay Vca Failure

2.2.4.17 – DCBSC – DC Bus Short circuit (Hidden Parameters – Reserved for service installation) (DRP)

FuncEnab	→	No Param	No Parameters
Options	→	DCBSC	0 Vn (0.00 ÷ 1.00) step 0.01 Vn
Timers	→	tDCB	0 s (0.00 ÷ 10.00) step 0.01 s
	→	tMin	0 s (0.00 ÷ 2.00) step 0.01 s

- ☐ **DCBSC** : DC Bus Short circuit Level
- ☐ **tDCB** : Time DC Bus short circuit
- ☐ **tMin** : Minimum time DC Bus short circuit Logical output signal

Trip when : Level "DCBSC" exceeded for time "tDCB"

When the function is tripped : Regulator = Is Blocked
Signalization = Led "Trip" is illuminated
Last Trip = Is recorded

Reset when : Returns in normal condition

2.2.4.17 – **VFB>** – V Feedback overvoltage (Hidden Parameters - Reserved for service installation) (DRP)

FuncEnab	→	Disable	[Disable / Enable]
Options	→	VFB> 0.50	Vn (0.50 ÷ 1.50) step 0.01 Vn
TripLev	→	No Param	No Parameters
Timers	→	tVFB> 0	s (0.00 ÷ 10.00) step 0.01 s

- ☐ **VFB>** : Overvoltage Level V Feedback
- ☐ **tVFB>** : Trip time overvoltage V Feedback

Trip when : Level “VFB>” exceeded for time “tVFB>”

When the function is tripped :

<i>Regulator</i>	=	Is Blocked
<i>Signalization</i>	=	Led “Trip” is illuminated
<i>Last Trip</i>	=	Is recorded

Reset when : Returns in normal condition

2.2.4.17 – **VFB<** – V Feedback undervoltage (Hidden Parameters - Reserved for service installation) (DRP)

FuncEnab	→	Disable	[Disable / Enable]
Options	→	VFB< 0.20	Vn (0.20 ÷ 1.00) step 0.01 Vn
TripLev	→	No Param	No Parameters
Timers	→	tVFB< 0	s (0.00 ÷ 10.00) step 0.01 s
	→	tStrt 0	s (0.00 ÷ 100.00) step 0.1 s
	→	tMin 0	s (0.00 ÷ 2.00) step 0.1 s

- ☐ **VFB<** : Undervoltage Level V Feedback
- ☐ **tVFB<** : Trip time Undervoltage V Feedback
- ☐ **tStrt** : Time Lock VFB< on start command
- ☐ **tMin** : Minimum time VFB Undervoltage Logical output signal

Trip when : Level “VFB<” exceeded for time “tVFB<”

When the function is tripped :

<i>Regulator</i>	=	Is Blocked
<i>Signalization</i>	=	Led “Trip” is illuminated
<i>Last Trip</i>	=	Is recorded

Reset when : Returns in normal condition

4. OUTPUT RELAYS

Each of them can be programmed (see § RelayCfg) to be controlled by any element (instantaneous or time delayed) of any of the Regulator Functions including Internal Relay Fault.

Moreover, the operation of each of the output relays can be programmed to be either Normally Deenergized (energized on tripping of the controlling Functional Element) or Normally Energized (Deenergized on tripping of the controlling Functional Element).

Available in the Regulator - MC22 (Board 0)

R1 : Lack of pulse

R2 : Fan

R3 : Protection Trip

Available in the UX10-4 Expansion Module (Board 3) (Only for DRP-6+6 version)

1.R1 : Q3

1.R2 : Q4

1.R3 : Q1

1.R4 : Q2

5. DIGITAL INPUT

Available in the - MC22 (Board 0)

0.D1	(terminals 22 - 19)	: Not used	The Digital Input is activated when its terminals are shorted by a dry contact ($R \leq 3k\Omega$).
0.D2	(terminals 22 - 21)	: Not used	
0.D3	(terminals 22 - 20)	: Trigger Oscillographic recording (see § Osc). Note: the input is active when the contact is close.	

Available in the DRP (Board 1)

D1	(terminals 177 - 179)	: Start/Stop	The Digital Input is activated when its terminals are shorted by a dry contact ($R \leq 3k\Omega$).
D2	(terminals 177 - 178)	: Reserved don't connect	

Available in the DRP (Board 2) (Only for DRP-6+6 version)

D1	(terminals 277 - 279)	: Reserved don't connect	The Digital Input is activated when its terminals are shorted by a dry contact ($R \leq 3k\Omega$).
D2	(terminals 277 - 278)	: DRP-6+6 mode – must be shorted	

Available in the UX10-4 Expansion Module (Board 3) (Only for DRP-6+6 version)

1.D1	Digital Input "D1"	(terminals 352 – 362)	Fuse 1	(+24V)	By the interface program "FRIEMCom" it is possible to Activate/Deactivate the functions.
1.D2	Digital Input "D2"	(terminals 353 – 363)	Fuse 2	(+24V)	
1.D3	Digital Input "D3"	(terminals 354 – 364)	TH Inductance	(+24V)	
1.D4	Digital Input "D4"	(terminals 355 – 365)	Q3	(+24V)	
1.D5	Digital Input "D5"	(terminals 356 – 366)	Q4	(+24V)	
1.D6	Digital Input "D6"	(terminals 372 – 382)	TH Transformer	(+24V)	
1.D7	Digital Input "D7"	(terminals 373 – 383)	TH Heatsink	(+24V)	
1.D8	Digital Input "D8"	(terminals 374 – 384)	Q1	(+24V)	
1.D9	Digital Input "D9"	(terminals 375 – 385)	Q2	(+24V)	
1.D10	Digital Input "D10"	(terminals 376 – 386)	BusBar Grounded	(+24V)	

Note: +24V = external supply Digital Inputs.

6. SELF DIAGNOSTIC

The regulator incorporates a sophisticated self-diagnostic feature that continuously checks the following elements:


- A/D conversion
- Checksum of the settings stored into E²Prom.
- DSP general operation (Power, Routines, etc.)
- Lamp test (only on manual test).
- Canbus supervision

Any time Power is switched on, a complete test is run; then, during normal operation, the test runs continuously and the checksum is done any time a parameter is stored into E²Prom.

If during the test any Relay Internal Failure (I.R.F) is detected:


- If “ I.R.F. “ is programmed to “ Trip “, the programmed output relay is activated, the same as on tripping of any protection function. It is stored in the “ Last Trip “ and the signal led “ON PULSE “ is switched off , and the regulator is blocked.
- If “ I.R.F. “ is programmed to “NO Trip”, the signal led “ON PULSE “ is switched off.

The regulator can be totally managed locally, either by the RS232 communication port or by the 4 key buttons and the LCD display, or remotely via the communication bus RS485 connected to the rear terminal blocks. The 2 line x 8 characters LCD display shows the available information. Key buttons operate according to the flow-chart herebelow.

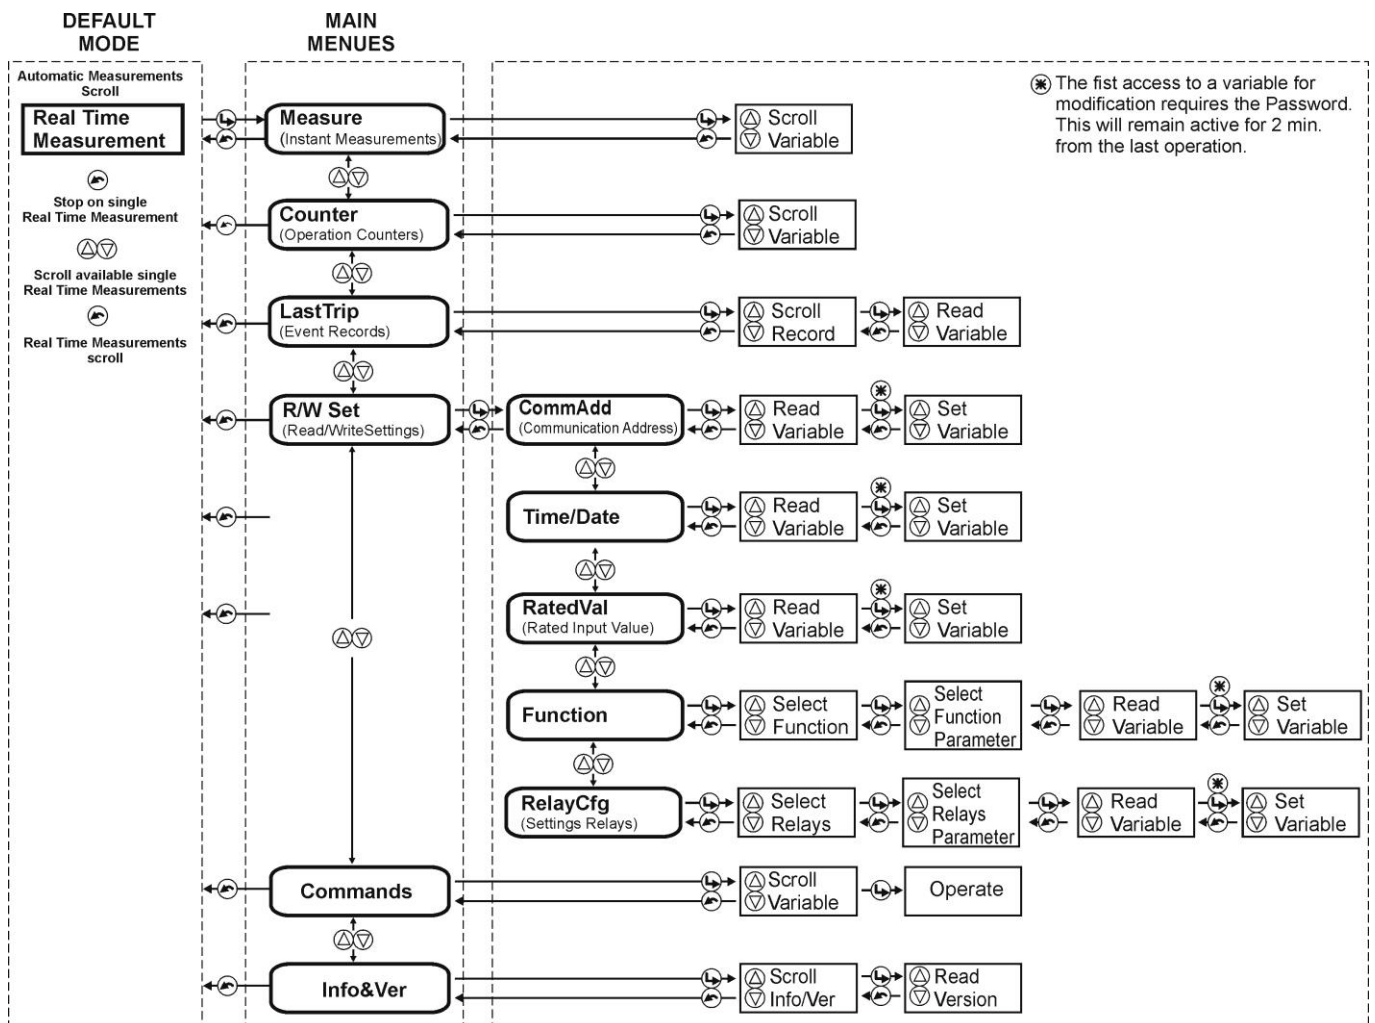

8. SIGNALIZATIONS

Four signal leds are available on the Front Face Panel:

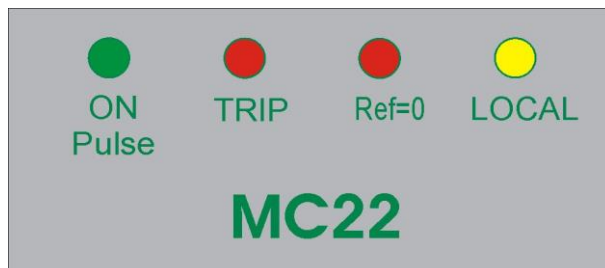

a)	Green LED	ON Pulse	☐ Off	: Internal Fault
			☐ Flashing	: When regulator is active.
			☐ Illuminated	: When regulator is stopped.
b)	Red LED	TRIP	☐ Off	: Normal status
			☐ Flashing	: When a timed function starts to operate.
			☐ Illuminated	: When any protection function trips.
b)	Red LED	Ref=0	☐ Off	: Reference $\neq$ 0
			☐ Flashing	: -----
			☐ Illuminated	: Reference = 0
d)	Yellow LED	LOCAL	☐ Off	: From SCADA or Analog Input
			☐ Flashing	: -----
			☐ Illuminated	: LOCAL Reference

9. KEYBOARD

	Enter	Give access to any menu or convalidate any programming changement.
	Reset	Return from the actual selected menu to the former menu.
	Select +	Scrolls variables available in the different menus or increases/decreases setting values.
	Select -	

10. Serial Communication Port

10.1 . Main RS485 Serial Communication Port (MC22)

This port is accessible via the terminals provided on the relay terminal board.

It is used for connection to a serial bus interfacing up to 31 units with the Central Supervision System (SCADA, DCS, ecc).

The serial bus is a shielded pair of twisted cables connecting in parallel (Multi Drop) the different units (slaves) by the relevant terminals.

The physical link is RS485 and the Communication Protocol is MODBUS/RTU / IEC60870-5-103.

The configuration of transmission parameters is selectable.

☐	Baud Rate	:	9600/19200 bps	9600/19200 bps	9600/19200 bps
☐	Start bit	:	1	1	1
☐	Data bit	:	8	8	8
☐	Parity	:	None	Odd	Even
☐	Stop bit	:	1	1	1

Note: any change of this setting becomes valid at the next power on.

Each relay is identified by its programmable address code (NodeAd) and can be called from the P.C.

A dedicated communication software (FriemCom) for windows 95/98/NT4 SP3 (or later) is available.


Please refer to the FriemCom instruction manual for more information.

Maximum length of the serial bus can be up to 200m.


10.2 - Communication Port on Front Face Panel – MC22 & DRP

This port is used for communication through the Front Face Panel between a local Lap-top PC.

The physical link is RS232 by the standard female 9-pin D-sub connector available on the Front Face Panel. Via this Port complete Relay management and data acquisition is possible.

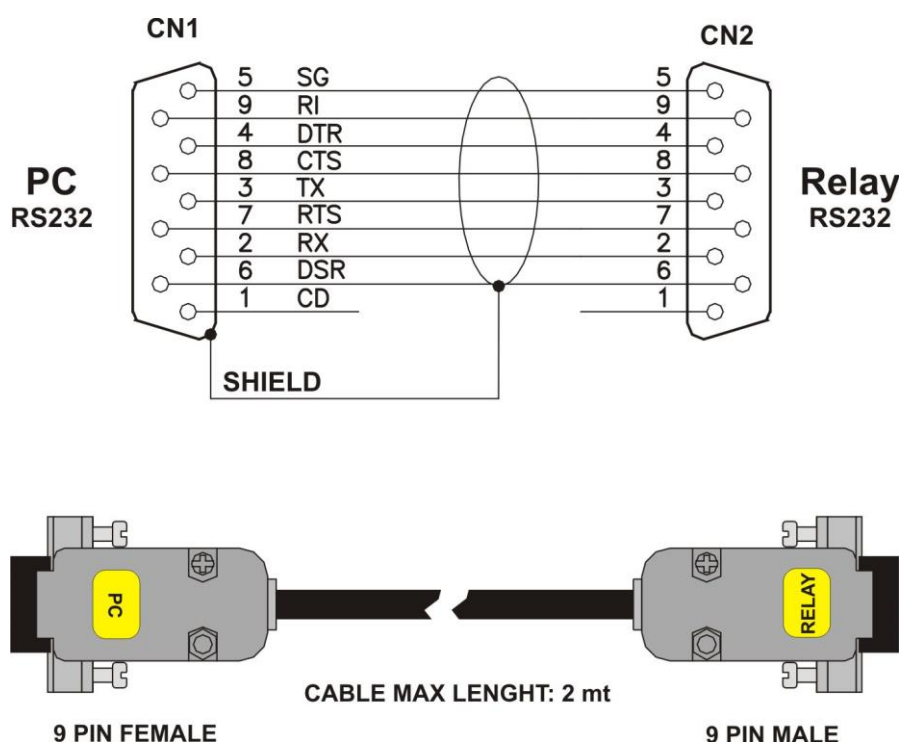

9.3 – Termination resistor

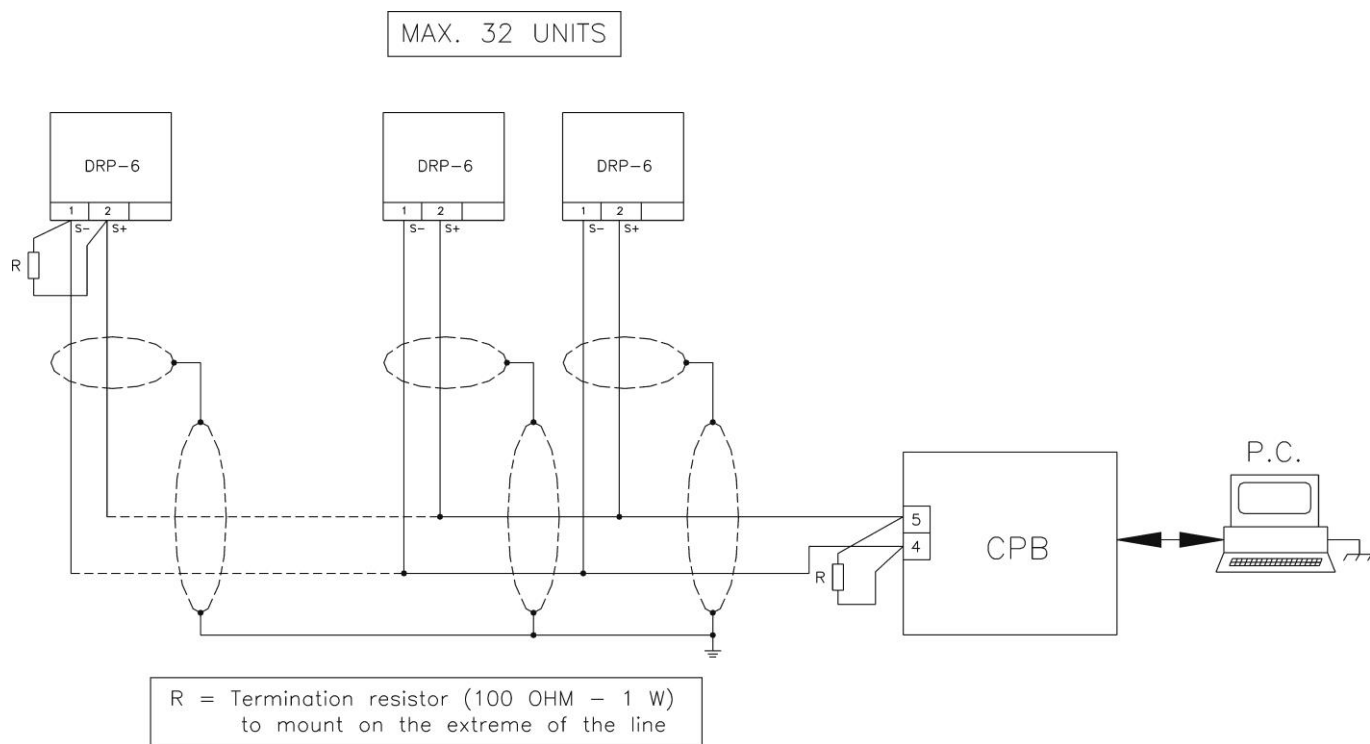

11. MENU AND VARIABLES

11.1 - Real Time Measurements

Scrolling display of the Real Time Measurements is the Default operation.

Scrolling can be stopped at any of the measurements and restarted by pressing the Reset button .

When stopped on one variable,  appears aside the measurement and the different available measurements can be selected by the   buttons.

Display			Description
VA	= 0 – 65535	V	AC Voltage phase A
VB	= 0 – 65535	V	AC Voltage phase B
VC	= 0 – 65535	V	AC Voltage phase C
Idc	= 0 – 65535	A	DC current feedback measured by CTs (*)
Ifr	= 0 – 65535	A	Current Reference set point from Field (on input 3)
Vfr	= 0 – 65535	V	Voltage Reference set point from Field (on input 2)
sIR	= 0 – 65535	%	Current Reference set point from SCADA (serial communication)
sVR	= 0 – 65535	%	Voltage Reference set point from SCADA (serial communication)
IFB	= 0 – 65535	A	DC Load Current (Feedback measured by transducer on input 4)
VFB	= 0 – 65535	V	DC Load Voltage (Feedback measured by transducer on input 6)
V1	= 0 – 65535	%	AC Direct voltage sequence
V2	= 0 – 65535	%	AC Inverse voltage sequence
aT	= 0 – 360	dg	Trigger shot angle

(*) Idc – Is the load current (DC) calculated, measured by CTs connected on the input of the rectifier.

11.2 - Measure (Instantaneous Measurements)

Real time measurements can be frozen at any moment selecting the menu “ Instant Measure “:

- “ Real Time Meas “ 
- “ Meas “ 
- “ 1st Measurement   other measurements
-  to go back to “ Meas “

Display			Description
VA	= 0 – 65535	V	AC Voltage phase A
VB	= 0 – 65535	V	AC Voltage phase B
VC	= 0 – 65535	V	AC Voltage phase C
Idc	= 0 – 65535	A	DC current feedback measured by CTs
Ifr	= 0 – 65535	A	Current Reference set point from Field (on input 3)
Vfr	= 0 – 65535	V	Voltage Reference set point from Field (on input 2)
sIR	= 0 – 65535	%	Current Reference set point from SCADA (serial communication)
sVR	= 0 – 65535	%	Voltage Reference set point from SCADA (serial communication)
IFB	= 0 – 65535	A	DC Load Current (Feedback measured by transducer on input 4)
VFB	= 0 – 65535	V	DC Load Voltage (Feedback measured by transducer on input 6)
V1	= 0 – 65535	%	AC Direct voltage sequence
V2	= 0 – 65535	%	AC Inverse voltage sequence
aT	= 0 – 360	g	Trigger shot angle

11.3 - Counter (Operation Counters)

The operation of any of the function herebelow reported, is counted and recorded in the menu “Counters “.

- “ Real Time Meas “ 
- “Counter “ 
- “ 1st counters  other counters
-  to go back to “Counter “

Display			Description
1I>	=	0 – 65535	Number of 1 st Overcurrent (time delayed) trip
2I>	=	0 – 65535	Number of 2 nd Overcurrent (time delayed) trip
3I>	=	0 – 65535	Number of 3 rd Overcurrent (time delayed) trip
I<	=	0 – 65535	Number of Undercurrent
U>	=	0 – 65535	Number of Overvoltage (time delayed) trip
U<	=	0 – 65535	Number of Undervoltage (time delayed) trip
U2>	=	0 – 65535	Number of Phase Sequence
IRF	=	0 – 65535	Number of Internal Relay Faults
HR	=	0 – 65535	Number of HW recovery operations
Ass	=	0 – 65535	Lack of synch.
DcB	=	0 – 65535	DC Bus Short circuit
VFB	=	0 – 65535	V Feedback Under/Over voltage

11.4 - LastTrip (Event Recording)

The regulator records any tripping and stores the information relevant to the last 20 tripping of protection functions (FIFO).

Each event recording includes the following information.

- " Real Time Meas " 
- " LastTrip " 
-  1st event,
-  to scroll available events,
-  to " Rec # " selected,
-  to select the different fields;

Display	Description
Func xxxxx	Indication of the protection function which caused the relay tripping. For indication of the TRIP Cause the following acronyms are used:
	- 1I> = 1st Overcurrent element - 2I> = 2nd Overcurrent element - 3I> = 3rd Overcurrent element - U> = Overvoltage element - U2> = Phase Sequence element - U< = Undervoltage element - IRF = Internal Relay Faults - Ass = Lack of synch. - DCBSC = DC Bus Short circuit - VFB> = V Feedback overvoltage - VBF< = V Feedback undervoltage
Date : YYYY/MM/GG	Date: Year/Month/Day
Time : hh:mm:ss:cc	Time: hours/minutes/second/hundredths of seconds
VA = 0 – 65535 V	Voltage phase A
VB = 0 – 65535 V	Voltage phase B
VC = 0 – 65535 V	Voltage phase C
Idc = 0 – 65535 A	DC current feedback measured by CTs
IFB = 0 – 65535 A	Current Feedback
VFB = 0 – 65535 V	Voltage Feedback

-  to go back to " Rec # " ,
-  to go back to " Real Time Meas " .

11.5 - R/W Set (Programming / Reading the Relay Settings)

-  " Main Menu "
-  select " Function " 
-  select among following sub menus:

11.5.1 - CommAdd (Communication Address)

-  " Common " 
- " Add: # " 
- " Password ???? " (if not yet entered; see § Password)
-  to select the Address (1-250)
-  to validate. Set Done!

The default address is 1.

Display	Description	Setting Range	Step	Unit
Add: 1	Identification number for connection on serial communication bus	1 - 250	1	-

11.5.2 - Time/Date (Time/Date)

-  " Time/Date "  Date: Current Date, Time: Current time
-  " YY/..... "  to set year,
-  " XX/MM "  to set month,
-  " XX/XX/DD "  to set day,
-  " XX/XX/XX " 
-  " hh/mm "  to set hour,
-  " XX/mm "  to set minutes,
-  To validate Set Done!
-  Exit

11.5.3 - RatedVal (Rated Input Values)

-  "RatedVal "
-  1st Variable
-  to scroll variables
-  to modify selected variable
- " Password ???? " (if not yet entered) or #??? (if not yet entered; see § Password)
-  to set variable value,
-  to validate. Set Done!

Display	Description	Setting Range	Step	Unit
I1 1000 A	Rated Primary current of phase C.T.	1 - 9999	1	A
I2 5 A	Rated Secondary current of phase C.T.	1 - 5	1/5	A
In 1000 A	Reference primary current of the relay	1 - 9999	1	A
V1 10 kV	Rated Primary voltage of phase V.T.	0.05 - 500	0.01	kV
V2 500 V	Rated Secondary voltage of phase V.T.	50 - 115	0.01	V
Freq 50 Hz	System rated frequency	50 - 60	10	Hz

11.5.4 - Function (Functions)

- “Function “,
 - 1st function,
 - to scroll available Functions,
 - to Read/Write setting of the selected function,
 - to select the different definable fields
 - to access the selected field and read the actual setting of the relevant variable
 - to modify the actual setting;
 - to set the new value.
 - to validate.
- FuncEnab - TripLev
- Options - Timers
- Set Done!

Display						Description	Setting Range	Step
Function	Type		Variable	Default Setting	Unit			
Password = 0000-9999 1111 -						Password for programming enable (see § Password)		
1I>	FuncEnab	→	Disable			Enable of the protection function	Disable/Enable	-
	Options	→	TCC	D		Time current curves	D,A,B,C	-
	TripLev	→	1I>	1.5	In	Trip level	0.10 – 2.00	0.01
	Timers	→	t1I>	60	s	Trip time delay	0.01 – 60.00	0.01
2I>	FuncEnab	→	Disable			Enable of the protection function	Disable/Enable	-
	Options	→	No Param			No Parameters		
	TripLev	→	2I>	1.75	In	Trip level	0.10 – 4.00	0.01
	Timers	→	t2I>	5.00	s	Trip time delay	0.05 – 60.00	0.01
3I>	FuncEnab	→	No Param			No Parameters		
	Options	→	Res	MAN		Reset: “MAN” = Manual - “AUT” = Automatic	MAN/AUT	-
	TripLev	→	3I>	2.00	In	Trip level	1.00 – 3.00	0.01
	Timers	→	t3I>	0.00	s	Trip time delay	0.00 – 60.00	0.01
U>	FuncEnab	→	Disable			Enable of the protection function	Disable/Enable	-
	Options	→	No Param			No Parameters		
	TripLev	→	U>	1.20	Un	Trip level	0.70 - 1.50	0.1
	Timers	→	tU>	3.00	s	Trip time delay	0.01 – 600	0.01
U<	FuncEnab	→	Disable			Enable of the protection function	Disable/Enable	-
	Options	→	No Param			No Parameters		
	TripLev	→	U<	0.80	Un	Trip level	0.80 - 1.10	0.1
	Timers	→	tU<	0.03	s	Trip time delay	0.01 – 600	0.01
U2>	FuncEnab	→	Disable			Enable of the protection function	Disable/Enable	-
	Options	→	No Param			No Parameters		
	TripLev	→	U2>	0.20	Un	Trip level	0.20 - 1.00	0.1
	Timers	→	tU2>	0.10	s	Trip time delay	0.01 – 600	0.01
PID-V	FuncEnab	→	No Param			No Parameters		
	Options	→	S/F	Field		Reference form SCADA or Field	SCADA/Field	-
	TripLev	→	K_P	1.00	-	Proportional gain	0.00 - 200	0.01
			K_I	0.00	-	Integrative gain	0.00 - 99.99	0.01
			K_D	0.00	-	Derivative gain	0.00 - 99.99	0.01
	Timers	→	rRmpV	5.00	s	Rise time voltage ramp	0.08 - 100	0.01
			fRmpV	0.10	s	Fall time voltage ramp	0.01 - 0.10	0.01
PID-I	FuncEnab	→	No Param			No Parameters		
	Options	→	S/F	Field		Reference form SCADA or Field	SCADA/Field	-
	TripLev	→	K_P	1.00	-	Proportional gain	0.00 - 200	0.01
			K_I	1.00	-	Integrative gain	0.00 - 99.99	0.01
			K_D	0.00	-	Derivative gain	0.00 - 99.99	0.01
	Timers	→	rRmpV	5.00	s	Rise time voltage ramp	0.08 - 100	0.01
			fRmpV	0.10	s	Fall time voltage ramp	0.01 - 0.10	0.01

Step	FuncEnab	→	Disable			Enable of the protection function	Disable/Enable	-
	Options	→	QFL		NoIFR	Q1-Q4 behavior on failure	NoIFR / IFR	-
	TripLev	→	s2s1	0.80	Vn	Step 2 to Step 1 Level to rising Voltage	0.00 – 2.00	0.01
			s1s2	0.70	Vn	Step 1 to Step 2 Level to descend Voltage	0.00 – 2.00	0.01
			s3s2	0.50	Vn	Step 3 to Step 2 Level to rising Voltage	0.00 – 2.00	0.01
			s2s3	0.40	Vn	Step 2 to Step 3 Level to descend Voltage	0.00 – 2.00	0.01
	Timers	→	ts2s1	5.00	s	Start time Step 2 to Step 1 Lev. to rising Volt.	0.00 – 120.00	1
			ts1s2	5.00	s	Start time Step 1 to Step 2 Lev. to desc.Volt.	0.00 – 120.00	1
			ts3s2	10.0	s	Start time Step 3 to Step 2 Lev. to rising Volt.	0.00 – 120.00	1
			ts2s3	10.0	s	Start time Step 2 to Step 3 Lev. to desc. Volt.	0.00 – 120.00	1
tQOp			2.00	s	Control time Open command Q1(Q4)	0.10 – 10.00	0.1	
tQCL	2.00	s	Control time Close command Q1 (Q4)	0.10 – 10.00	0.1			
Fan	FuncEnab	→	Disable			Enable of the protection function	Disable/Enable	-
	Options	→	No Param			No Parameters		
	TripLev	→	No Param			No Parameters		
	Timers	→	tFan	60.00	s	Time for turn-off fan after stop command	60 - 600	10
Test	FuncEnab	→	No Param			No Parameters		
	Options	→	Tst	Disable		Test Mode	Disab/Rif/TrigAng	-
	TripLev	→	L_RifI	0.00	%	Current Local reference	0.00 - 100	0.01
			L_RifV	0.00	%	Voltage Local reference	0.00 - 100	0.01
			Ang.T	0.00	g	Test arbitrary angle	0.00-359.99	0.01
	Timers	→	No Param			No Parameters		
Osc	FuncEnab	→	Disable			Enable of the protection function	Disable/Enable	-
	Options	→	Trg	Disable		select command for Trigger (start recording):	Disable Start Trip Ext.Imp.	-
	TripLev	→	No Param			No Parameters		
	Timers	→	tPre	5	s	Recording time before Trigger	5 – 15	1
			tPost	10	s	Recording time after Trigger	0.10 – 1.50	0.1
LoadP	FuncEnab	→	Disable			Enable of the protection function	Disable/Enable	-
	Options	→	No Param			No Parameters		
	TripLev	→	No Param			No Parameters		
	Timers	→	tLP	1.00	m	Scan time	1.00 – 650	1
IRF	FuncEnab	→	Disable			Enable of the protection function	Disable/Enable	-
	Options	→	Opz	NoTrip		Internal Failure Trip=Trip; NoTrip=No Trip	Trip-NoTrip	-
	TripLev	→	No Param			No Parameters		
	Timers	→	No Param			No Parameters		
LCD	FuncEnab	→	No Param			No Parameters		
	Options	→	Key	BeepON		Buzzer “Beep” on operation of Keyboard buttons.	BeepON-BeepOFF	-
			BkL	Auto		LCD Backlight continuously “ON” or switched-on Automatically on operation of Keyboard buttons.	Auto - On	-
	TripLev	→	No Param			No Parameters		
	Timers	→	No Param			No Parameters		
Comm	FuncEnab	→	No Parameters					
	Options	→	LBd	9600		Local Baud Rate (Front panel RS232 communication speed)	9600 - 19200 38400 - 57600	-
			RBd	9600		Remote Baud Rate (Rear panel terminal blocks RS485 communication speed)	9600 - 19200	-
			Mod	8,n,1		Remote mode (communication parameters) <i>Note: any change of this setting became valid at the next power on</i>	8,n,1 8,o,1 8,e,1	-
			Rpr	Modbus		Remote Protocol	-	-
	TripLev	→	No Parameters					
	Timers	→	No Parameters					

Settings can also be programmed via the serial communication ports.

(Hidden Parameters - Reserved for service installation)

Display						Description	Setting Range	Step
Function	Type		Variable	Default Setting	Unit			
I<	FuncEnab	→	No Param			No Parameters		
	Options	→	No Param			No Parameters		
	TripLev	→	I<	0.03	In	Trip level	0.03 – 1.00	0.01
	Timers	→	tI<	0.05	s	Trip time delay	0.05 – 40.00	0.01
Ass	FuncEnab	→	No Param			No Parameters		
	Options	→	No Param			No Parameters		
	TripLev	→	NotU	Reserved				
	Timers	→	No Param			No Parameters		
OpMd	FuncEnab	→	No Param			No Parameters		
	Options	→	OpMd	Master Mode		Operation Mode: - Master Mode DRP-6 - Master/Slave Mode DRP-6+6	-	-
		→	Icc	0		Number Average of Icc	1 - 10	1
		→	IFB	0		Number Average of IFB	1 - 10	1
		→	VFB	0		Number Average of VFB	1 - 10	1
	TripLev	→	No Param			No Parameters		
	Timers	→	tVca	0.20	s	Trip time delay Vca Failure	0.00 – 2.00	0.01
DCBSC	FuncEnab	→	No Param			No Parameters		
	Options	→	DCBSh	0	Vn	DC Bus Short circuit Level	0.00 – 1.00	0.01
	TripLev	→	No Param			No Parameters		
	Timers	→	tDCB	0	s	Time DC Bus short circuit	0.00 – 10.00	0.01
		→	tMin	0	s	Minimum time DC Bus short circuit Logical output signal	0.00 - 2.00	0.01
VFB>	FuncEnab	→	Disable			Enable of the protection function	Disable/Enable	-
	Options	→	VFB>	0.50	Vn	Overvoltage Level V Feedback	0.50 – 1.50	0.01
	TripLev	→	No Param			No Parameters		
	Timers	→	tVFB>	0	s	Trip time overvoltage V Feedback	0.00 - 10.00	0.01
VFB<	FuncEnab	→	Disable			Enable of the protection function	Disable/Enable	-
	Options	→	VFB<	0.20	Vn	Undervoltage Level V Feedback	0.20 – 1.00	0.01
	TripLev	→	No Param			No Parameters		
	Timers	→	tVFB<	0	s	Trip time Undervoltage V Feedback	0.00 - 10.00	0.01
		→	tStrt	0	s	Time Lock VFB< on start command	0.00 – 100.00	0.1
		→	tMin	0	s	Minimum time VFB Undervoltage Logical output signal	0.00 – 2.00	0.1

11.6 - RelayCfg (Relay Configuration)

To associate one of the Output Relays to one or more functions (see § Password): enter the menu “R/W Set”, select “Relay Cfg”, select the “Relay #” to be programmed, select “Link”; at this stage the list of the available functions is displayed. Scrolling the list by the “+” and “-” keys the function is selected and then assigned by the key “Enter”. The assignation is confirmed by the function indication that switches from blinking to steady.

Any of the Output Relays can be programmed to work in two different modes:

- **N.D.** Normally Deenergized Relay is energized on trip of the associated functions
- **N.E.** Normally Energized Relay is deenergized on trip of the associated functions

Programming of working mode is made as above selecting “OpMode” instead of “Link”.

Available in the MC22 Module

Relay	Display		Default Value	Description	Setting Range	Step
	Type	→				
Relay1 (R1)	Link	→	BlcDRPm	Association of functions to output relay R1	1I>, t1I>, 2I>, t2I>, 3I>, t3I>, I<, tI<, U>, tU>, U2>, tU2>, U<, tU<, SAT>1, SAT<1, SAT>2, SAT<2, Q1, Q2, Q3, Q4, St-s2s1, Tr-s2s1, St-s1s2, Tr-s1s2, St-s3s2, Trs3s2, St-s2s3, TR-s2s3, SETP1, STEP2, STEP3, Fan_On, BlcDRPm, VcaFail, BlcDRPs, DRP-stat, Fail-DRP, Test, IRF, HwRecov., AssSyn, TAssSyn, GenStart, GenTrip, DCBShC, VFB<>	-
	OpMode	→	N.D.	N.D. (Normally Deenergized) N.E. (Normally Energized)	N.D./N.E.	-
Relay2 (R2)	Link	→	Fan_On	Association of functions to output relay R2	1I>, t1I>, 2I>, t2I>, 3I>, t3I>, I<, tI<, U>, tU>, U2>, tU2>, U<, tU<, SAT>1, SAT<1, SAT>2, SAT<2, Q1, Q2, Q3, Q4, St-s2s1, Tr-s2s1, St-s1s2, Tr-s1s2, St-s3s2, Trs3s2, St-s2s3, TR-s2s3, SETP1, STEP2, STEP3, Fan_On, BlcDRPm, VcaFail, BlcDRPs, DRP-stat, Fail-DRP, Test, IRF, HwRecov., AssSyn, TAssSyn, GenStart, GenTrip, DCBShC, VFB<>	-
	OpMode	→	N.D.	N.D. (Normally Deenergized) N.E. (Normally Energized)	N.D./N.E.	-
Relay3 (R3)	Link	→	t1I>, t2I>, t3I>, tU>, tU2>, tU<.	Association of functions to output relay R3	1I>, t1I>, 2I>, t2I>, 3I>, t3I>, I<, tI<, U>, tU>, U2>, tU2>, U<, tU<, SAT>1, SAT<1, SAT>2, SAT<2, Q1, Q2, Q3, Q4, St-s2s1, Tr-s2s1, St-s1s2, Tr-s1s2, St-s3s2, Trs3s2, St-s2s3, TR-s2s3, SETP1, STEP2, STEP3, Fan_On, BlcDRPm, VcaFail, BlcDRPs, DRP-stat, Fail-DRP, Test, IRF, HwRecov., AssSyn, TAssSyn, GenStart, GenTrip, DCBShC, VFB<>	-
	OpMode	→	N.D.	N.D. (Normally Deenergized) N.E. (Normally Energized)	N.D./N.E.	-

Available in the UX10-4 Module (Board 3) (Only for DRP-6+6 version)

Relay	Display		Default Value	Description	Setting Range	Step
	Type					
1.R1	Link	→	Q3	Association of functions to output relay 1.R1	1I>, t1I>, 2I>, t2I>, 3I>, t3I>, I<, tI<, U>, tU>, U2>, tU2>, U<, tU<, SAT>1, SAT<1, SAT>2, SAT<2, Q1, Q2, Q3, Q4, St-s2s1, Tr-s2s1, St-s1s2, Tr-s1s2, St-s3s2, Trs3s2, St-s2s3, TR-s2s3, SETP1, STEP2, STEP3, Fan_On, BlcDRPm, VcaFail, BlcDRPs, DRP-stat, Fail-DRP, Test, IRF, HwRecov., AssSyn, TAssSyn, GenStart, GenTrip, DCBShC, VFB<>	-
	OpMode	→	N.D.	N.D. (Normally Deenergized) N.E. (Normally Energized)	N.D./N.E.	-
1.R2	Link	→	Q4	Association of functions to output relay 1.R2	1I>, t1I>, 2I>, t2I>, 3I>, t3I>, I<, tI<, U>, tU>, U2>, tU2>, U<, tU<, SAT>1, SAT<1, SAT>2, SAT<2, Q1, Q2, Q3, Q4, St-s2s1, Tr-s2s1, St-s1s2, Tr-s1s2, St-s3s2, Trs3s2, St-s2s3, TR-s2s3, SETP1, STEP2, STEP3, Fan_On, BlcDRPm, VcaFail, BlcDRPs, DRP-stat, Fail-DRP, Test, IRF, HwRecov., AssSyn, TAssSyn, GenStart, GenTrip, DCBShC, VFB<>	-
	OpMode	→	N.D.	N.D. (Normally Deenergized) N.E. (Normally Energized)	N.D./N.E.	-
1.R3	Link	→	Q1	Association of functions to output relay 1.R3	1I>, t1I>, 2I>, t2I>, 3I>, t3I>, I<, tI<, U>, tU>, U2>, tU2>, U<, tU<, SAT>1, SAT<1, SAT>2, SAT<2, Q1, Q2, Q3, Q4, St-s2s1, Tr-s2s1, St-s1s2, Tr-s1s2, St-s3s2, Trs3s2, St-s2s3, TR-s2s3, SETP1, STEP2, STEP3, Fan_On, BlcDRPm, VcaFail, BlcDRPs, DRP-stat, Fail-DRP, Test, IRF, HwRecov., AssSyn, TAssSyn, GenStart, GenTrip, DCBShC, VFB<>	-
	OpMode	→	N.D.	N.D. (Normally Deenergized) N.E. (Normally Energized)	N.D./N.E.	-
1.R4	Link	→	Q2	Association of functions to output relay 1.R3	1I>, t1I>, 2I>, t2I>, 3I>, t3I>, I<, tI<, U>, tU>, U2>, tU2>, U<, tU<, SAT>1, SAT<1, SAT>2, SAT<2, Q1, Q2, Q3, Q4, St-s2s1, Tr-s2s1, St-s1s2, Tr-s1s2, St-s3s2, Trs3s2, St-s2s3, TR-s2s3, SETP1, STEP2, STEP3, Fan_On, BlcDRPm, VcaFail, BlcDRPs, DRP-stat, Fail-DRP, Test, IRF, HwRecov., AssSyn, TAssSyn, GenStart, GenTrip, DCBShC, VFB<>	-
	OpMode	→	N.D.	N.D. (Normally Deenergized) N.E. (Normally Energized)	N.D./N.E.	-

1I>	Start – First Overcurrent protection level	(instantaneous)
t1I>	Trip – First Overcurrent protection level	(time delayed)
2I>	Start – Second Overcurrent protection level	(instantaneous)
t2I>	Trip – Second Overcurrent protection level	(time delayed)
3I>	Start – Third Overcurrent protection level	(instantaneous)
t3I>	Trip – Third Overcurrent protection level	(time delayed)
I<	Start – Undercurrent protection level	(instantaneous)
tI<	Trip – Undercurrent protection level	(time delayed)
U>	Start – Overvoltage protection level	(instantaneous)
tU>	Trip – Overvoltage protection level	(time delayed)
U2>	Start – Phase sequence	(instantaneous)
tU2>	Trip – Phase sequence	(time delayed)
U<	Start – Undervoltage protection level	(instantaneous)
tU<	Trip – Undervoltage protection level	(time delayed)
SAT>1	PID-V saturation	
SAT<1	PID-V saturation	
SAT>2	PID-I saturation	
SAT<2	PID-I saturation	
Q1	Command Q1	
Q2	Command Q2	
Q3	Command Q3	
Q4	Command Q4	
St-s2s1	Start step 2 to step 1	
Tr-s2s1	Trip step 2 to step 1	

St-s1s2	Start step 1 to step 2
Tr-s1s2	Trip step 1 to step 2
St-s3s2	Start step 3 to step 2
Tr-s3s2	Trip step 3 to step 2
St-s2s3	Start step 2 to step 3
Tr-s2s3	Trip step 2 to step 3
Step1	Step 1
Step2	Step 2
Step3	Step 3
Fan_On	Fan running
BlcDRPm	Block DRP Master
VcaFail	Vca Failure
BlcDRPs	Block DRP Slave
RegAct	Regulation Active
FailDRP	Failure DRP
Test	Test
IRF	Internal Regulator Fault
HwRecov	Hardware Recovery
AssSyn	Start - Lack Synchronism
tAssSyn	Trip - Lack Synchronism
GenStart	General Starts
GenTrip	General Trip
DCBShC	DC Bus Short circuit
VFB<>	Under/Over Feedback

11.7 - Commands

- “ Commands “
- 1st Control,
- to select other available control,
- to operate selected control.


Display	Description	
Clear	:	Erase memory of Trip Counters, Event Records.
Test	:	Starts a relay diagnostic test
Reset	:	Reset after trip
FTrOsc	:	Force Oscillographic Trigger
StartReg	:	Start Regulation
StopReg	:	Stop Regulation
Restart	:	Restart DRP can protocol (Hidden Parameters - Reserved for service installation)
User	:	User Select Q1-Q4 step (Hidden Parameters - Reserved for service installation)

11.8 - Info&Ver


The menu displays the Relay Model and the Firmware Version

- “ **Real Time Meas** “
- “ Info/Ver “,
- “ Model XXXXXX ”, Model Relay
- “ RelayVrs ###.#.#X “, Firmware Version
- to go back to “ Info&Ver “.
- to go back to “ **Real Time Meas** “

12. KEYBOARD OPERATIONAL DIAGRAM

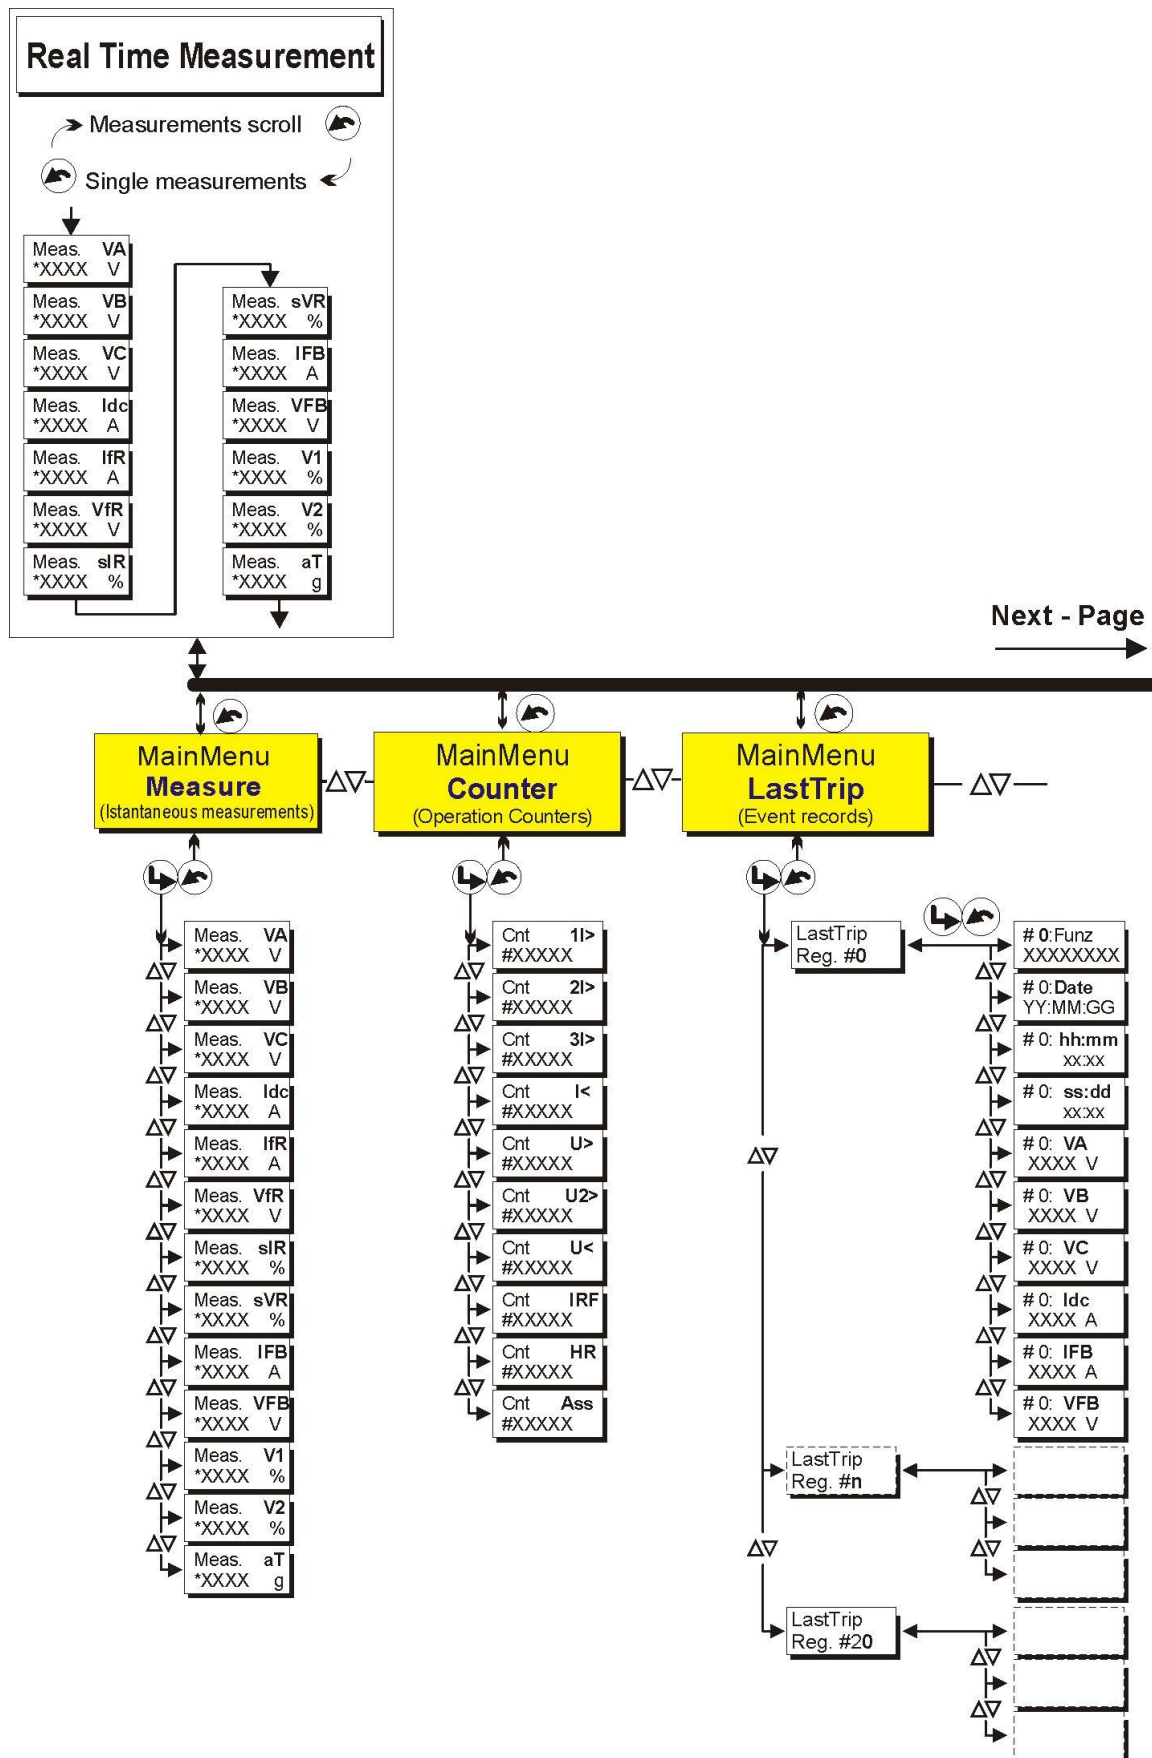

Previous - Page

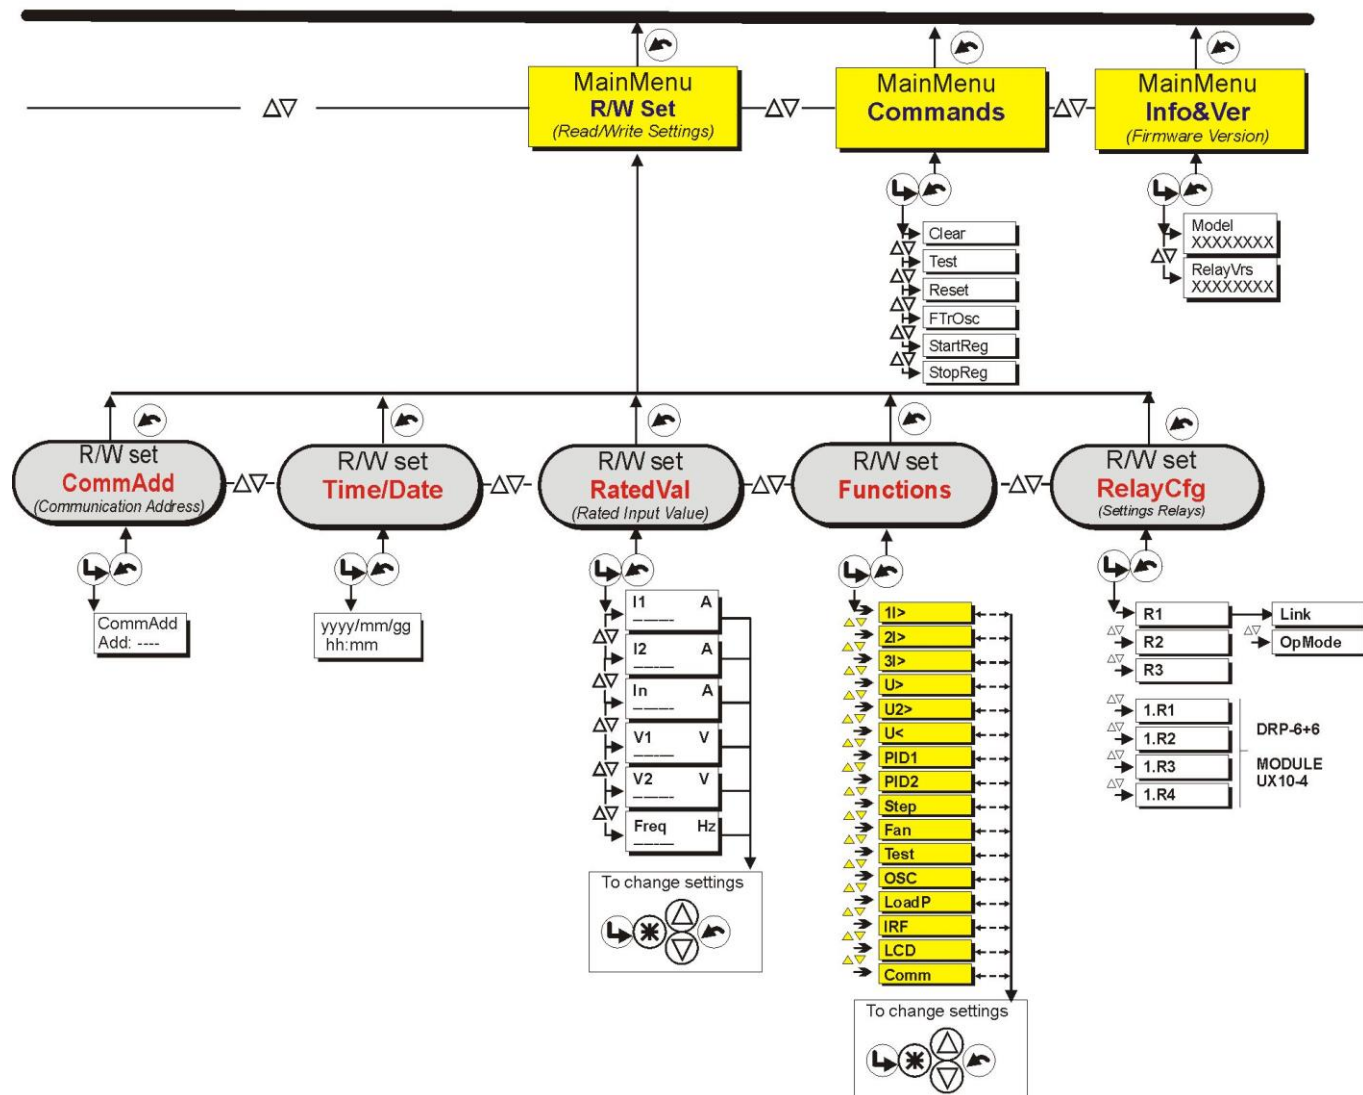

13. PASSWORD

This password is requested anytime the user wants to write in the “Settings” menu a command of the “Commands” menu.

The default password is “ 1111 “

When password is required, proceed as follows

The Display shows the message “ Password ????? “

- | | | | | |
|---|---|---------------------------------------|---|------------------------|
| - |  | to select 1 st digit (1-9) |  | to validate |
| - |  | to select 2 nd digit (1-9) |  | to validate |
| - |  | to select 3 rd digit (1-9) |  | to validate |
| - |  | to select 4 th digit (1-9) |  | to complete procedure. |

The “ password “ is required any time you attempt to modify one of the programmable variables at the first entrance in the “Settings” and/or “Commands” menus.

The “ password “remains valid for 2 minutes from the last operation of the programming buttons or until the  button is pressed to return to the default display (RT Meas).

Once the Password has been entered, a “ # “ appears before the variable that can be modified.

13.1 - MS-Com Password

This password is requested anytime the user wants to send to the relay a setting parameters modification or to issue a command through the relay itself using the managing software MCom.

The user can decide whether inserting his own password (see MS-Com Operational Manual) or keeping the password disabled just clicking on the OK button when the password is requested.

14. MAINTENANCE



No maintenance is required. In case of malfunctioning please contact FRIEM Service or the local Authorised Dealer mentioning the relay's Serial No reported in the label on relays enclosure.

15. POWER FREQUENCY INSULATION TEST



Every relay individually undergoes a factory insulation test according to IEC255-5 standard at 2 kV, 50 Hz 1min. Insulation test should not be repeated as it unusefully stresses the dielectrics.

When doing the insulation test, the terminals relevant to serial output, digital inputs and RTD input must always be short circuited to ground. When relays are mounted in switchboards or relay boards that have to undergo the insulation tests, the relay should be isolated. This is extremely important as discharges eventually taking place in other parts or components of the board can severely damage the relays or cause damages not immediately evident to the electronic components.


16. DRP-6 - WIRING DIAGRAM

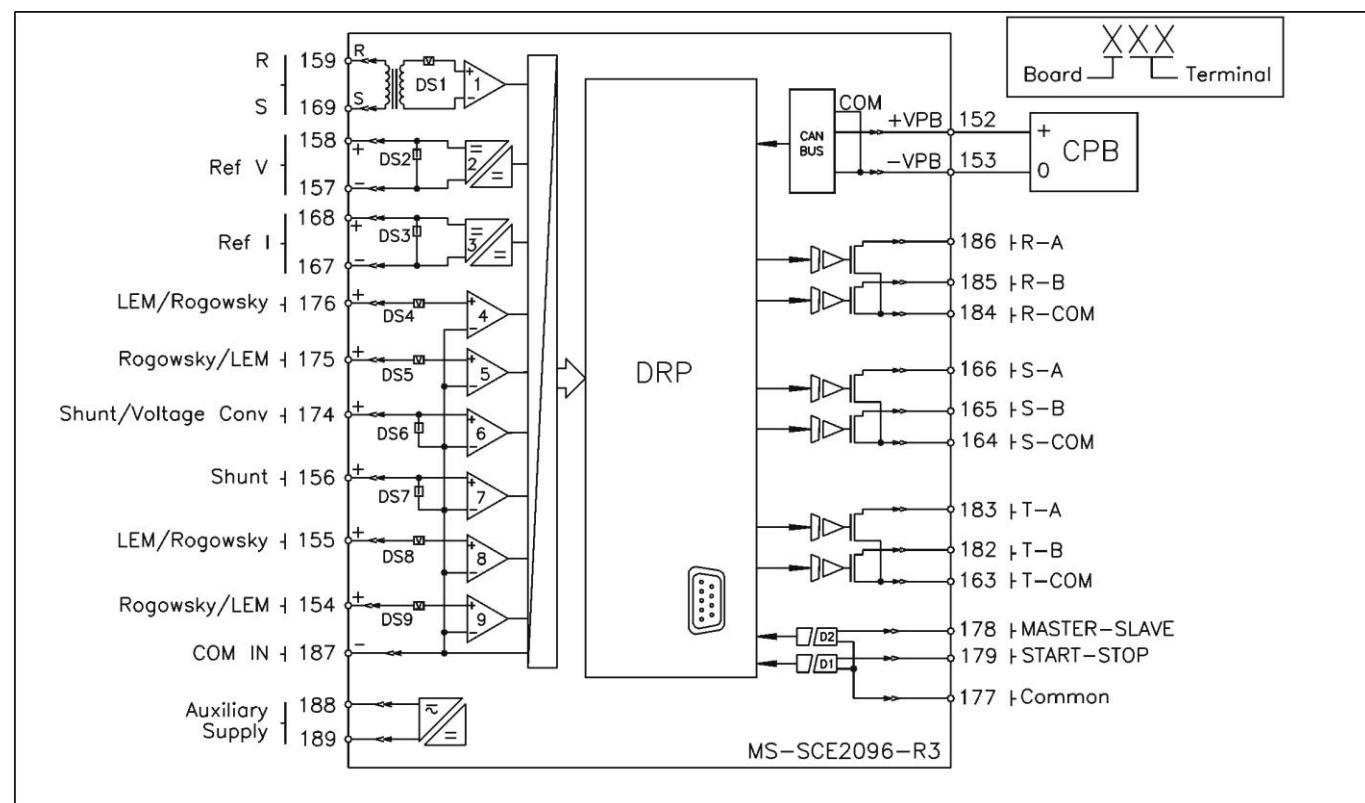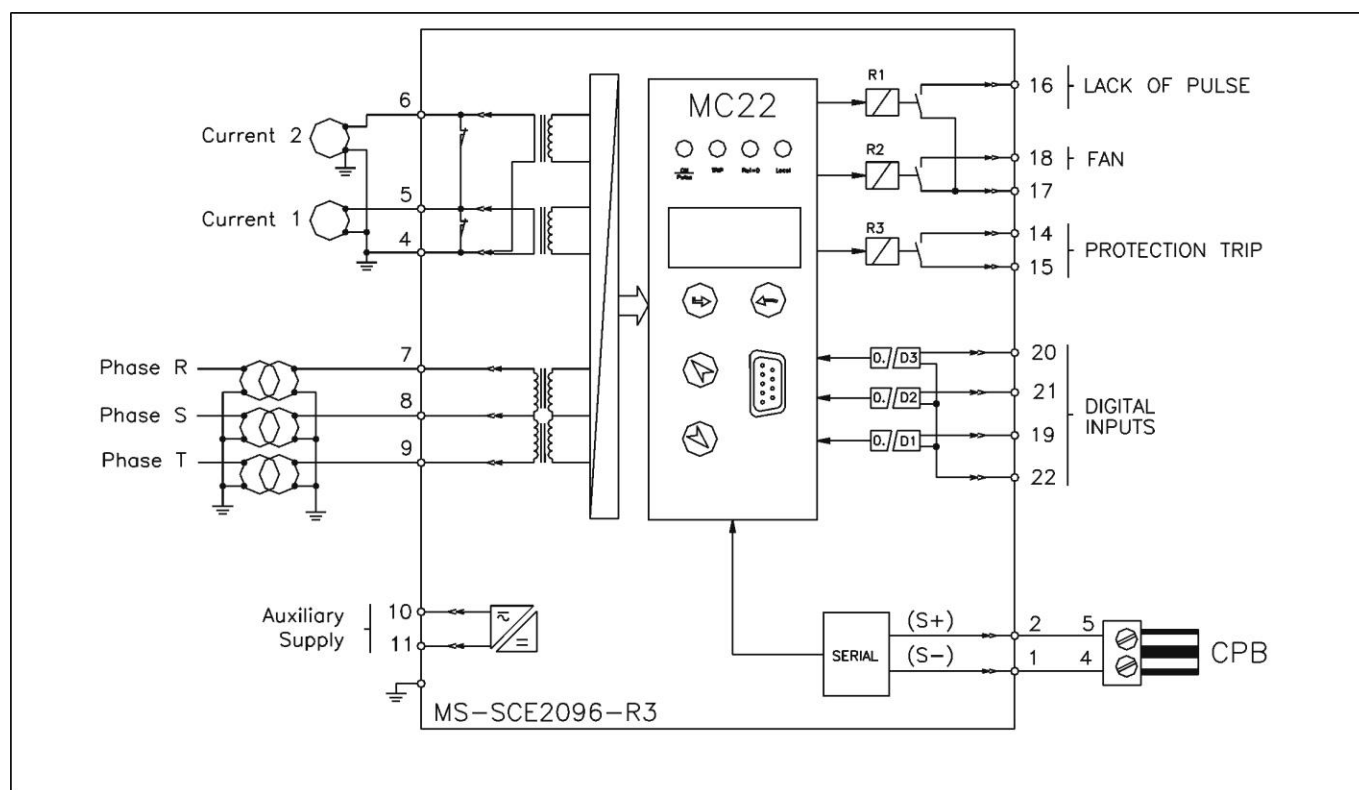




16.1 – DRP-6+6 - WIRING DIAGRAM

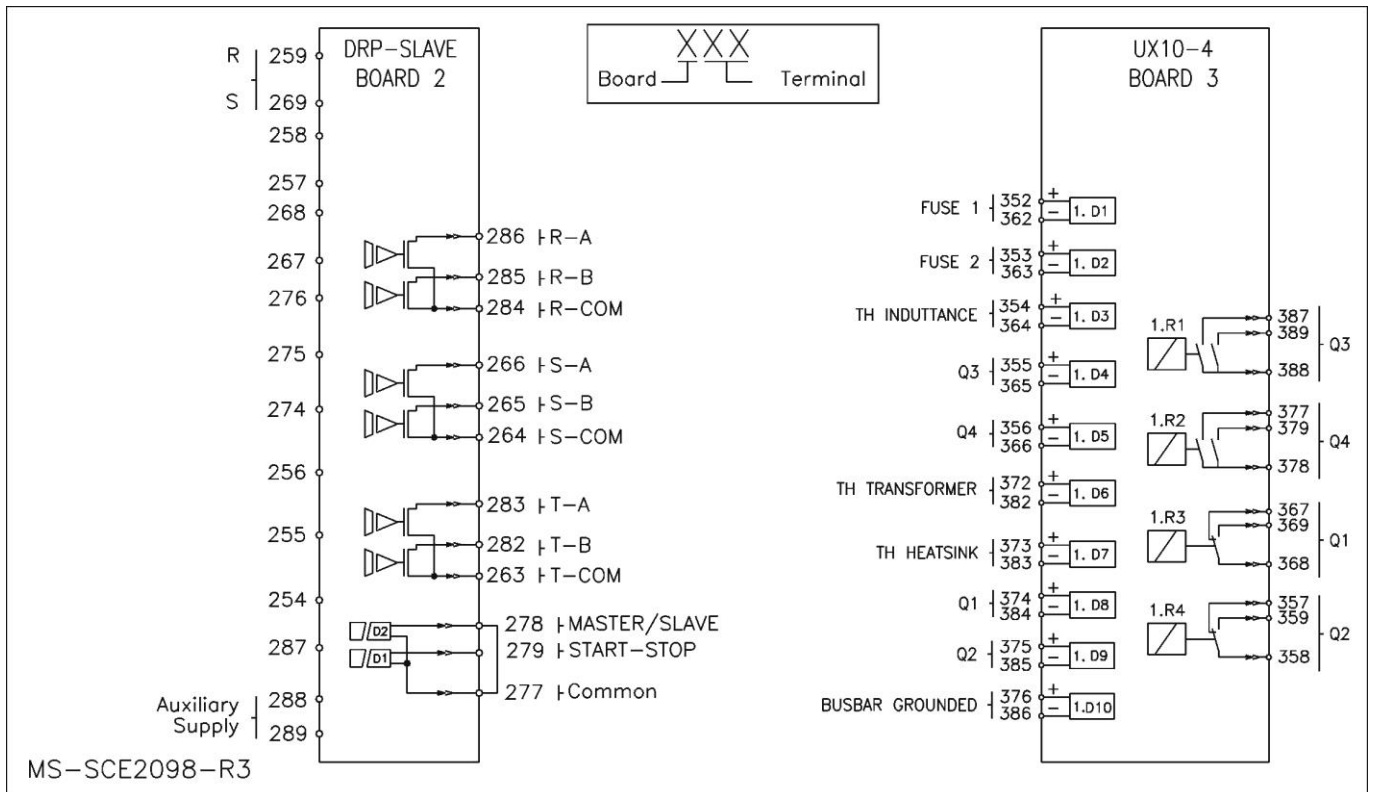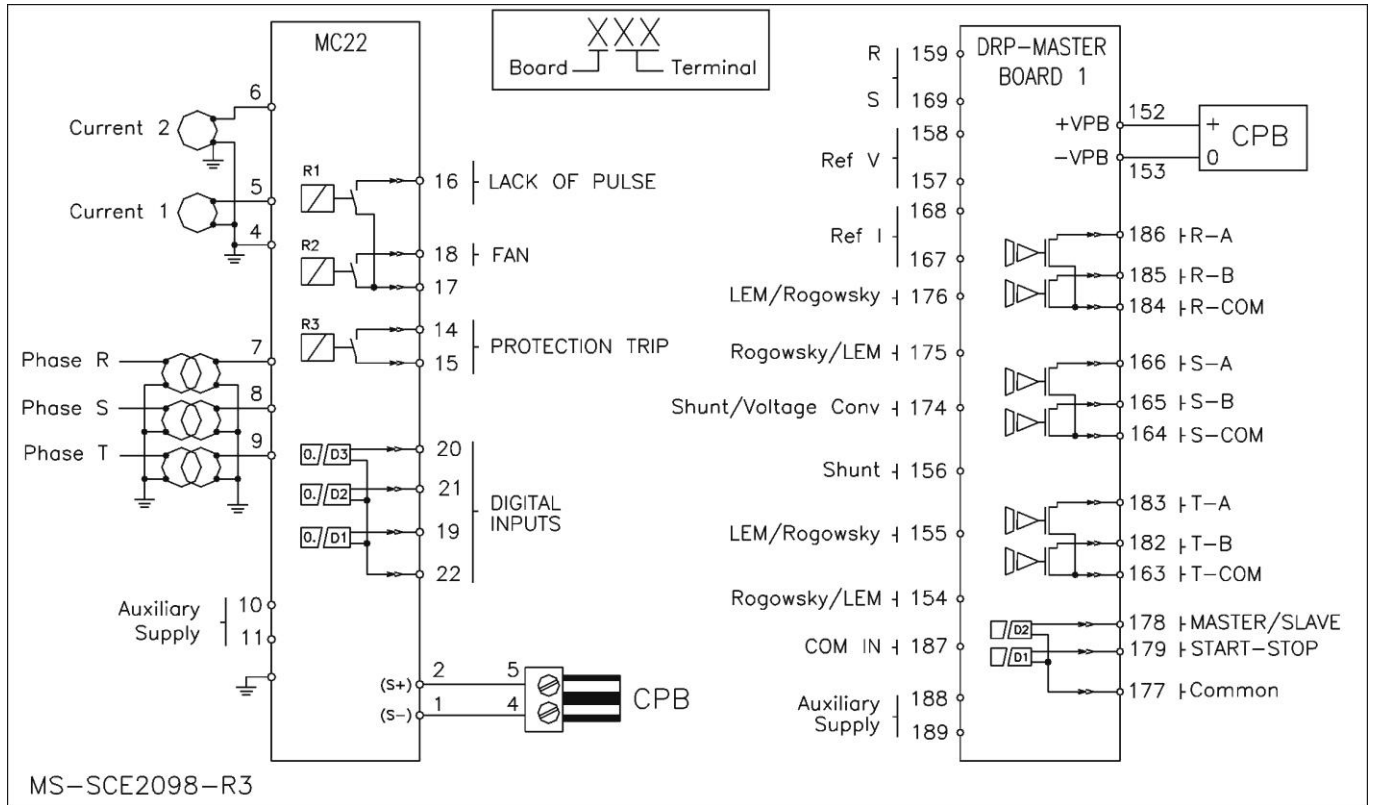


17. DRP-6 - OVERALL DIMENSIONS (mm)

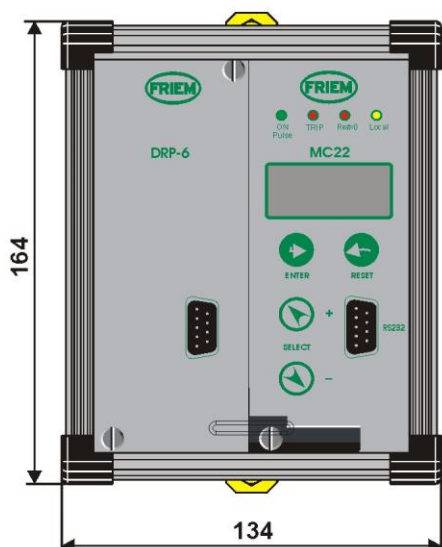



PANEL CUT-OUT
115x137 (LxH)

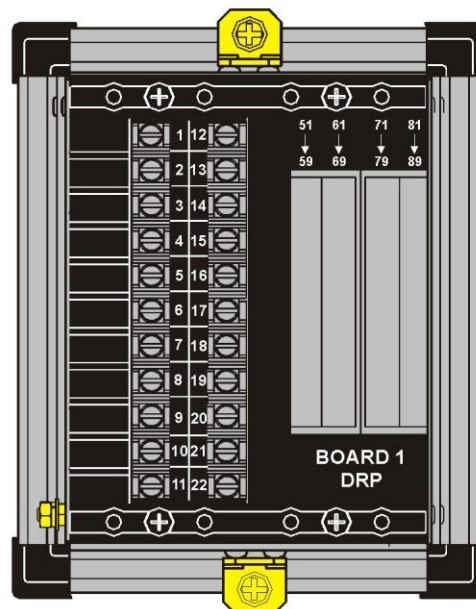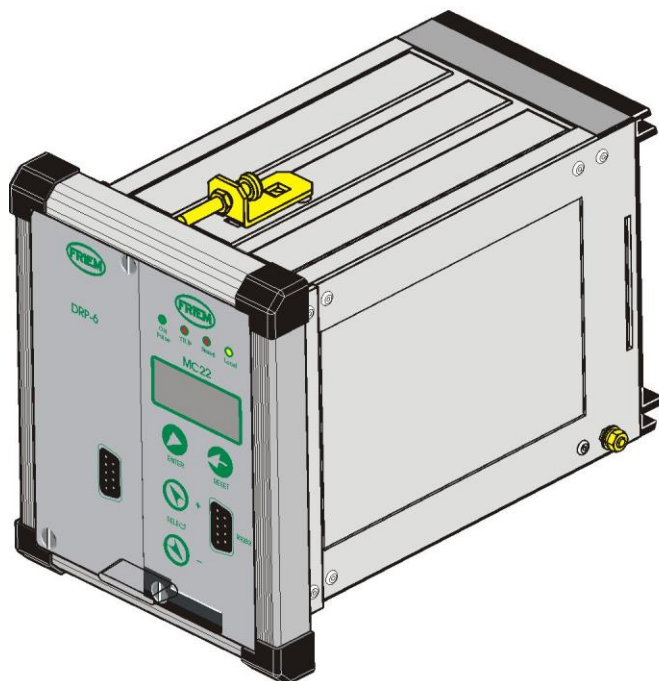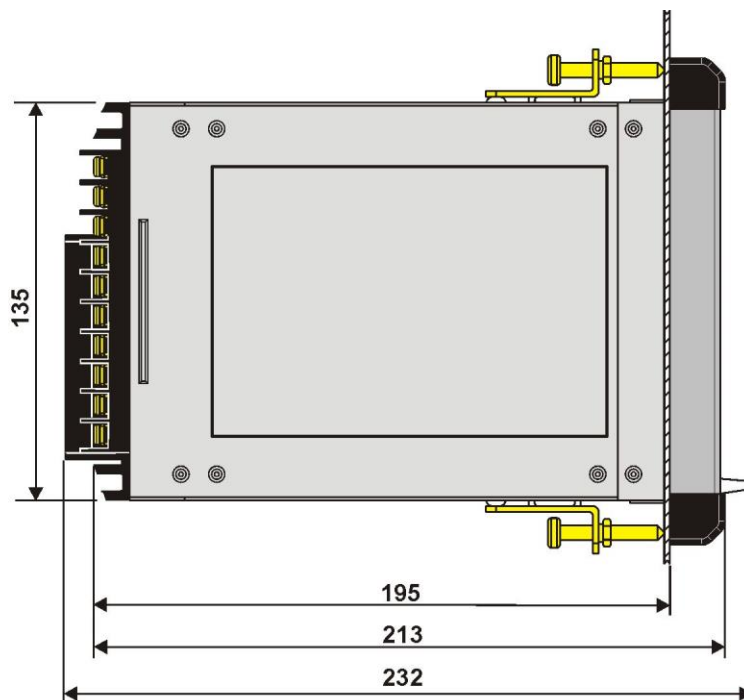

VIEW OR REAR - TERMINAL CONNECTION

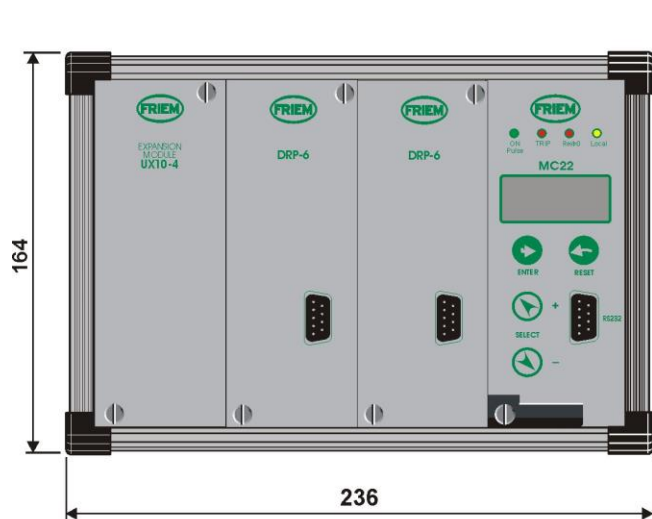16.1 – DRP-6+6 – Overall Dimensions (mm)


PANEL
CUT-OUT
217x137 (LxH)

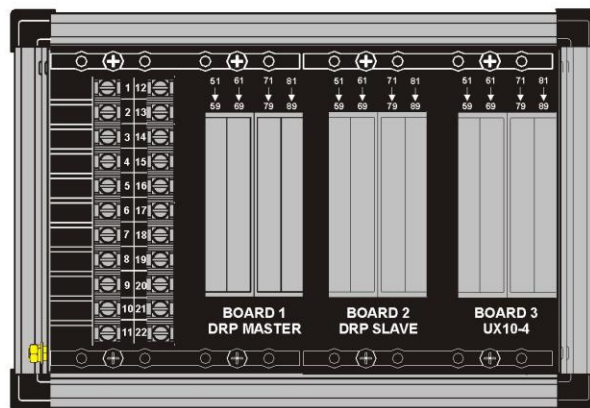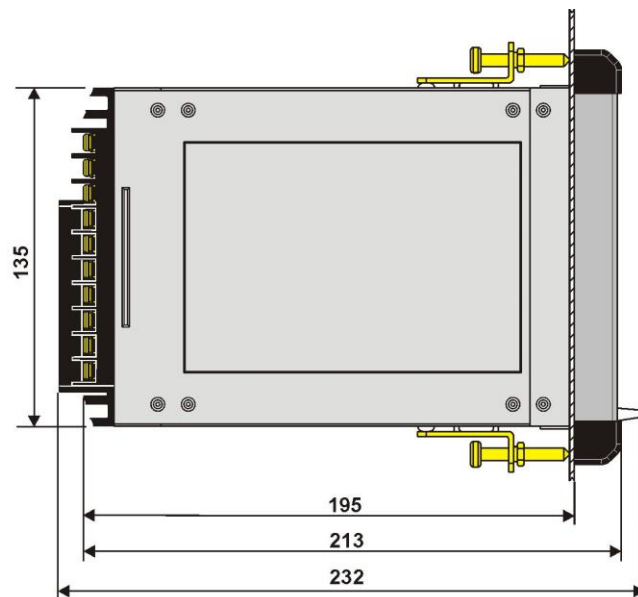


VIEW OR REAR - TERMINAL CONNECTION

18. DIRECTION FOR PCB'S DRAW-OUT AND PLUG-IN**18.1 - Draw-Out**

Rotate clockwise the screws ① in the horizontal position of the screws-driver mark.
Draw-out the PCB by pulling on the handle ②

18.2 - Plug-In

Rotate clockwise the screws ① in the horizontal position of the screws-driver mark.
Slide-in the card on the rails provided inside the enclosure.
Plug-in the card completely and by pressing the handle to the closed position.
Rotate anticlockwise the screws ① with the mark in the vertical position (locked).

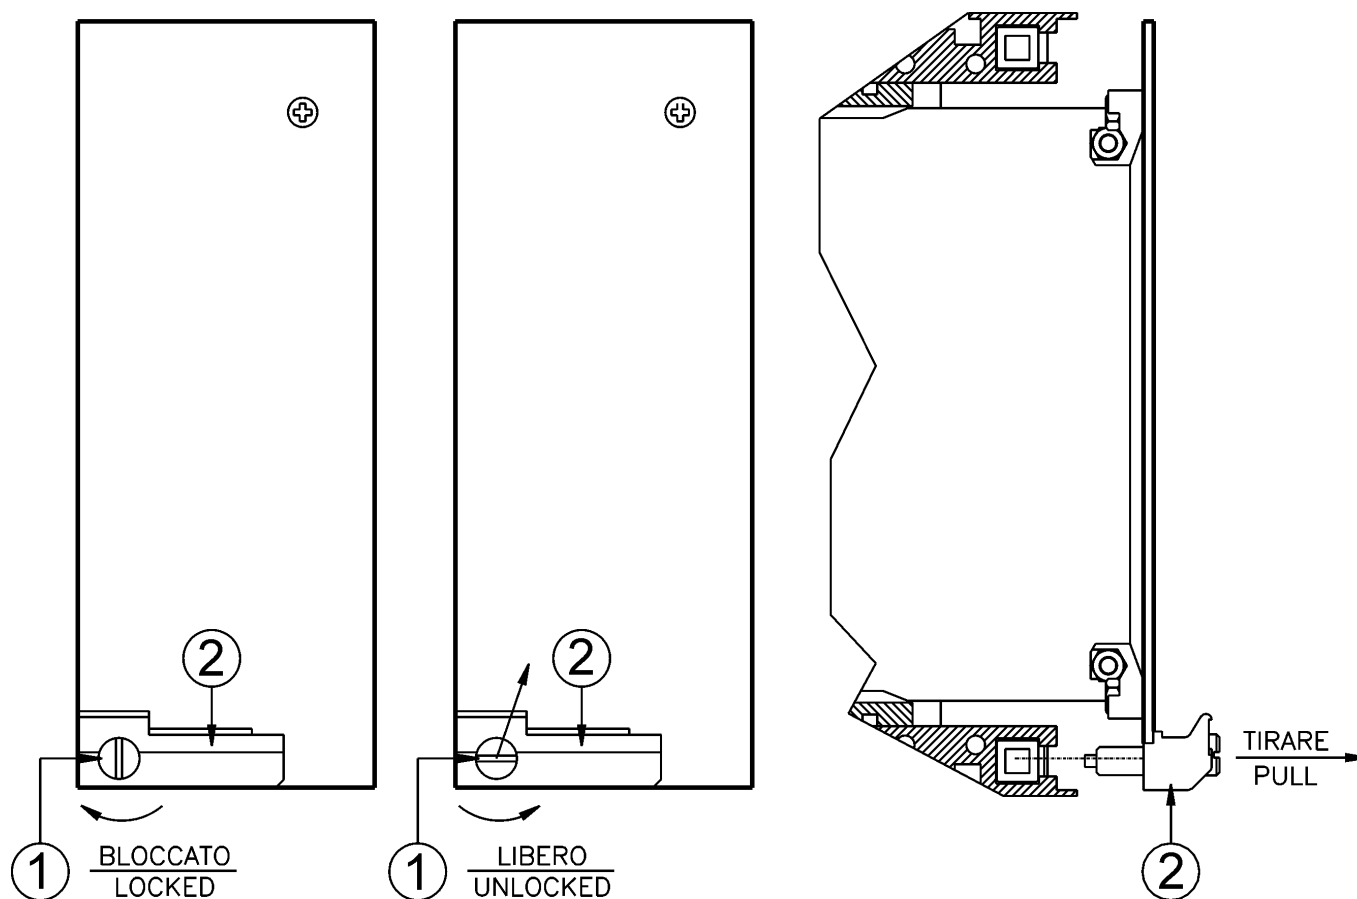

19. ELECTRICAL CHARACTERISTICS

APPROVAL: CE - REFERENCE STANDARDS IEC 60255 - EN50263 - CE Directive - EN/IEC61000 - IEEE C37

☐ Dielectric test voltage	IEC 60255-5	2kV, 50/60Hz, 1 min.
☐ Impulse test voltage	IEC 60255-5	5kV (c.m.), 2kV (d.m.) – 1,2/50µs
☐ Insulation resistance	> 100MΩ	

Environmental Std. Ref. (IEC 60068)

☐ Operation ambient temperature	-10°C / +55°C
☐ Storage temperature	-25°C / +70°C
☐ Environmental testing	(Cold) IEC60068-2-1
	(Dry heat) IEC60068-2-2
	(Change of temperature) IEC60068-2-14
	(Damp heat, steady state) IEC60068-2-78 RH 93% Without Condensing AT 40°C

CE EMC Compatibility (EN50081-2 - EN50082-2 - EN50263)

☐ Electromagnetic emission	EN55022	industrial environment
☐ Radiated electromagnetic field immunity test	IEC61000-4-3 ENV50204	level 3 80-2000MHz 10V/m 900MHz/200Hz 10V/m
☐ Conducted disturbances immunity test	IEC61000-4-6	level 3 0.15-80MHz 10V
☐ Electrostatic discharge test	IEC61000-4-2	level 4 6kV contact / 8kV air
☐ Power frequency magnetic test	IEC61000-4-8	1000A/m 50/60Hz
☐ Pulse magnetic field	IEC61000-4-9	1000A/m, 8/20µs
☐ Damped oscillatory magnetic field	IEC61000-4-10	100A/m, 0.1-1MHz
☐ Immunity to conducted common mode disturbance 0Hz-150KHz	IEC61000-4-16	level 4
☐ Electrical fast transient/burst	IEC61000-4-4	level 3 2kV, 5kHz
☐ HF disturbance test with damped oscillatory wave (1MHz burst test)	IEC60255-22-1	class 3 400pps, 2,5kV (m.c.), 1kV (d.m.)
☐ Oscillatory waves (Ring waves)	IEC61000-4-12	level 4 4kV(c.m.), 2kV(d.m.)
☐ Surge immunity test	IEC61000-4-5	level 4 2kV(c.m.), 1kV(d.m.)
☐ Voltage interruptions	IEC60255-4-11	
☐ Resistance to vibration and shocks	IEC60255-21-1 - IEC60255-21-2	10-500Hz 1g

ELECTRIC RATED VALUE

☐ Accuracy at nominal value	<1% F.s. for regulation <2% F.s. for measure 2% + to (to=20÷30ms @ 2xIs) for time
☐ Accuracy on regulation	1% F.s.
☐ Average power supply consumption	≤ 7 VA
☐ Output relays	rating 6 A; Vn = 250 V A.C. resistive switching = 1500VA (400V max) make = 30 A (peak) 0,5 sec. - break = 0.3 A, 110 Vcc, L/R = 40 ms (100.000 op.)

COMMUNICATION PARAMETER

☐ RS485 (Back)	9600/19200/38400/57600 bps – 8,n,1 - 8,e,1 - 8,o,1 – Modbus RTU
☐ RS232 (Front)	9600/19200 – 8,n,1 – Modbus RTU

FRIEM S.p.A. Via Edison, 1 - 20090 SEGRATE - Milano (MI) - Italy
Tel: +39 022133341 - Fax: +39 0226923036 - info@friem.com

The performances and the characteristics reported in this manual are not binding and can modified at any moment without notice