

D.C. SUBSTATION PROTECTIVE RELAY

TYPE

U-MLES-PLV-TS

"ULTRA"

Line

OPERATION MANUAL



1. General Utilization and Commissioning Directions	6
1.1 - Storage and Transportation	6
1.2 - Installation	6
1.3 - Electrical Connection	6
1.4 - Measuring Inputs and Power Supply	6
1.5 - Outputs Loading	6
1.6 - Protection Earthing	6
1.7 - Setting and Calibration	6
1.8 - Safety Protection	6
1.9 - Handling	6
1.10 - Maintenance	6
1.11 - Waste Disposal of Electrical & Electronic Equipment	6
1.12 - Fault Detection and Repair	6
2. General	7
2.1 - Power Supply	8
3. Front Panel	8
4. Keyboard and Display	9
5. Icons of Main Menu (Desktop)	10
6. Signalization	11
6.1 - Display of the last trip	11
6.2 - Leds Configuration	12
6.2.1 - Name	12
6.2.2 - Link enable	12
6.2.3 - Status	12
6.2.4 - Light Prog.	12
6.2.5 - Funct. Mode	12
6.2.6 - Functions	12
6.2.7 - Table 1	13
6.3 - Example: Change settings for "Led5"	15
6.3.1 - "Enable"	15
6.3.2 - "Flashing"	16
6.3.3 - "Latched"	17
6.3.4 - "Functions"	17
7. User Variables	18
7.1 - Name	18
7.2 - User Descr.	18
7.3 - Linked functions	18
7.4 - OpLogic	18
7.5 - Timer	18
7.6 - Timer type	18
7.7 - Logical status	18
7.8 - Example: Setting "User Variable"	19
7.8.1 - "User description" (User descr.)	20
7.8.2 - "Linked Functions"	20
7.8.3 - "Operation Logic" (Oplogic)	21
7.8.4 - "Timer"	21
7.8.5 - "Timer type"	22
8. Home	23
9. Commands	24
10. Maximum Values (available only via MScOm2)	25
11. Energy	26
12. Last Trips	27
13. Counters	28
14. ReadOnlyCnt	29
15. Events	30
15.1 - Events on display	31
16. Systems (System Parameters)	33
16.1 - Nominal Values	34
16.2 - Characteristic	34
16.3 - Comm Add Node	34
16.4 - IO board configuration	34
17. Settings	35
17.1 - Modifying the setting of variables	36
17.2 - Password	37
17.3 - Menu: Comm. (Communication)	37
17.3.1 - Description of variables	37
17.3.2 - Front Panel USB serial communication port	37
17.3.3 - Cable for connection from Relay to Personal Computer	37
17.3.4 - Rear serial communication port (RS485)	38
17.3.5 - Rear communication port (Ethernet with Modbus protocol)	38
17.3.6 - Wiring the Ethernet Communication	38
17.4 - Menu: HMI (Human Machine Interface - customize)	39

17.4.1 – Led configuration	39
17.4.2 – WirCB scheme – Scheme configuration	40
17.4.2.1 – C/B Status	40
17.4.2.2 – C/B Status	40
17.4.2.3 – Scheme types	40
17.4.2.4 – Example – Configuration with Touch Screen	41
17.4.2.5 – Example – Configuration main C/B	41
17.4.2.6 – Example – Configuration with MScom2 software	42
17.4.2.7 – Example – Setting Digital Inputs to C/B status with Touch Screen	43
17.5 – Function: T> (Thermal Image F49)	44
17.5.1 – Description of variables	44
17.5.2 – Trip and Alarm	44
17.5.2.1 – Trip time of the Thermal Image Element	44
17.5.2.2 – Thermal Image Curves (TU1024 Rev.1)	45
17.6 – Function: 1I> (First Overcurrent Element F50/51)	46
17.6.1 – Description of variables	46
17.6.2 – Algorithm of the time current curves	47
17.6.3 – IEC Curves	48
17.6.4 – Blocking Logic (BO-BI)	49
17.6.4.1 – Output Blocking signal "BO"	49
17.6.4.2 – Blocking Input "BI"	49
17.6.5 – Automatic doubling of Overcurrent thresholds on current inrush	49
17.7 – Function: 2I> (Second Overcurrent Element F50/51)	50
17.7.1 – Description of variables	50
17.8 – Function: 3I> (Third Overcurrent Element F50/51)	51
17.8.1 – Description of variables	51
17.9 – Function: 4I> (Fourth Overcurrent Element F50/51)	52
17.9.1 – Description of variables	52
17.10 – Function: 1delta-I (First Current Step Element)	53
17.10.1 – Description of variables	53
17.10.2 – Operation of the Current step monitoring element	54
17.11 – Function: 2delta-I (Second Current Step Element)	55
17.11.1 – Description of variables	55
17.12 – Function: 1di/dt (First Current Rate of Rise Element)	56
17.12.1 – Description parameters	56
17.12.2 – Operation of the current rate of rise monitoring element	56
17.13 – Function: 2di/dt (Second Current Rate of Rise Element)	57
17.13.1 – Description parameters	57
17.13.2 – Operation of the current rate of rise monitoring element	57
17.14 – Function: Rapp (Impedance monitoring - di/dt dependence)	58
17.14.1 – Description of variables	58
17.14.2 – Operation the Impedance monitoring element	58
17.15 – Function: Iapp (Current monitoring with di/dt dependence)	59
17.15.1 – Description of variables	59
17.15.2 – Operation of the "Iapp" element	59
17.16 – Function: 1Ig (First Frame Fault Element)	60
17.16.1 – Description of variables	60
17.16.2 – Operation	60
17.17 – Function: 2Ig (Second Frame Fault Element)	61
17.17.1 – Description of variables	61
17.17.2 – Operation	61
17.18 – Function: RCL (Automatic Reclosure)	62
17.18.1 – Description of variables	62
17.18.2 – Operation	62
17.18.3 – Status indication	63
17.18.4 – Flow chart RCL	64
17.19 – Function: 1U> (First OverVoltage Element F59)	65
17.19.1 – Description of variables	65
17.20 – Function: 2U> (Second OverVoltage Element F59)	65
17.20.1 – Description of variables	65
17.21 – Function: 1U< (First UnderVoltage Element F27)	66
17.21.1 – Description of variables	66
17.22 – Function: 2U< (Second UnderVoltage Element F27)	66
17.22.1 – Description of variables	66
17.23 – Function: Wi (Circuit Breaker maintenance level)	67
17.23.1 – Description of variables	67
17.23.2 – Operation (Accumulation of the interruption Energy)	67
17.24 – Function: TCS (Trip Circuit Supervision)	68
17.24.1 – Description of variables	68
17.24.2 – Operation	68
17.25 – Function: IRF (Internal Relay Fault)	69
17.25.1 – Description of variables	69
17.25.2 – Operation	69
17.26 – Function: RT (First Element Remote Trip)	70
17.26.1 – Description of variables	70
17.26.2 – Operation	70

17.27 - Function: RTX (Second Element Remote Trip)	71
17.27.1 - Description of variables	71
17.27.2 - Operation	71
17.28 - Function: BrkFailure (Breaker Failure)	72
17.28.1 - Description of variables	72
17.28.2 - Operation	72
17.29 - Function: Wh (Energy counter Pulse)	73
17.29.1 - Description of variables	73
17.29.2 - Operation	73
17.30 - Function: Self Trip (Energy counter Pulse)	73
17.30.1 - Description of variables	73
17.30.2 - Operation	73
17.31 - Function: Oscillo (Oscillographic Recording)	74
17.31.1 - Description of variables	74
17.31.2 - Operation	74
17.31.3 - Available on MCom2	75
17.31.4 - Setting "Oscillo Trigger Logic"	77
17.31.4.1 - Name	77
17.31.4.2 - User descr.	77
17.31.4.3 - Linked functions	77
17.31.4.4 - OpLogic	77
17.31.4.5 - Timer	77
17.31.4.6 - Timer type	77
17.31.4.7 - Logical status	77
17.31.4.8 - Example: Setting "User Variable"	78
17.31.4.9 - "Linked Functions"	79
17.31.4.10 - "Operation Logic" (OpLogic)	80
17.31.4.11 - "Timer"	80
17.31.4.12 - "Timer type"	81
17.32 - Function: L/R CB Cmds (Local Remote Close Breaker Commands)	82
17.32.1 - Description of variables	82
17.33 - Function: CB-L (Lock C/B reclosure)	83
17.33.1 - Description of variables	83
17.33.2 - Operation	83
17.34 - Function: LT (Automatic Line Test)	84
17.34.1 - Description of variables	84
17.34.2 - Operation	84
17.34.4 - Display status indication	84
17.34.3 - Flow chart	85
17.35 - Function: ExtReset (External Reset Configuration)	86
17.35.1 - Description of variables	86
17.36 - Function: Dia C/B (Diagnostic C/B position)	86
17.36.1 - Description of variables	86
17.36.2 - Operation	86
18. Input – Output (Via Keyboard or MCom2 software)	87
18.1 – Digital Input	87
18.2 – "DI" Configuration parameter available (via keyboard or MCom2 software)	87
18.3 – Function available	88
18.4 – "InpCfg" Inputs Configuration - via Touch Screen	90
18.5 – "InpView" Inputs Status View - via Touch Screen	90
18.6 – "DI" Configuration - via MCom2 software	91
18.6.1 – Example	91
18.6.2 – Name	91
18.6.3 – Status	91
18.6.4 – OpLogic	91
18.6.5 – Functions	91
18.6.6 – Example: Setting "Digital Input"	91
18.6.7 – "Functions"	92
18.7 – Outputs Relay	93
18.8 – "OutCfg" Outputs Configuration - via Touch Screen	93
18.9 – "OutCfg" Outputs Configuration - via MCom2 software	95
18.9.1 – "Example"	95
18.9.2 – "Relay"	95
18.9.3 – "Linked function"	95
18.9.4 – "Operation Logic"	95
18.9.5 – "Logical Status"	95
18.9.6 – "Output Configuration"	95
18.9.7 – "tON - Operation Time"	95
18.9.8 – "Relay Status"	95
18.9.9 – Functions - Operation Mode	96
18.9.10 - Example: Change settings for "0.R1"	97
18.9.10.1 - "Linked Functions"	97
18.9.10.2 - "Output Config"	98
18.9.10.3 - "Function"	99
18.9.10.4 - "tON"	99
19. UserVar	100
19.1 – Configuration – via Touch Screen	100

19.1.1 - Selection Gate	100
19.1.2 - "Logic"	101
19.1.2.1 - "Logic"	101
19.1.2.2 - "Timer"	101
19.1.3 - "Link" (example without "Logic" assigned)	102
19.1.4 - "Link" (example with "Logic = AND" assigned)	102
19.1.5 - "Timer"	103
19.1.6 - "Preset"	103
19.2 - Configuration - via MCom2 software	104
19.2.1 - Name	104
19.2.2 - User Descr.	104
19.2.3 - Linked functions	104
19.2.4 - OpLogic	104
19.2.5 - Timer	104
19.2.6 - Timer type	104
19.2.7 - Logical status	104
19.2.8 - Example: Setting "User Variable"	105
19.2.8.1 - "User description" (User descr.)	106
19.2.8.2 - "Linked Functions"	107
19.2.8.3 - "Operation Logic" (Oplogic)	108
19.2.8.4 - "Timer"	108
19.2.8.5 - "Timer type"	109
20. Date and Time	110
20.1- Clock synchronization	110
21. Healthy (Diagnostic Information)	111
22. Info (Device Information)	112
23. FW Version (Firmware Version)	113
24. Software Application	113
25. Display Cal. (Display Calibration)	114
25.1 - Set Default Calibration Touch Panel (via software MCom2)	115
26. Battery	116
27. Maintenance	116
28. Power Frequency Insulation Test	116
29. Wiring Diagram	117
29.1 - UX10-4 - Expansion Module - Wiring Diagram (10 Digital Inputs + 4 Output Relays)	117
29.2 - 14DO - Expansion Module - Wiring Diagram (14 Output Relays)	118
29.3 - 14DI - Expansion Module - Wiring Diagram (14 Digital Inputs)	118
30. Overall Dimensions	119
31. Electrical Characteristics	120

1. General Utilization and Commissioning Directions

Always make reference to the specific description of the product and to the Manufacturer's instruction. Carefully observe the following warnings.

1.1 - Storage and Transportation

Must comply with the environmental conditions stated in the product's specification or by the applicable IEC standards.

1.2 - Installation

Must be properly made and in compliance with the operational ambient conditions stated by the Manufacturer.

1.3 - Electrical Connection

Must be made strictly according to the wiring diagram supplied with the Product, to its electrical characteristics and in compliance with the applicable standards particularly with reference to human safety.

1.4 - Measuring Inputs and Power Supply

Carefully check that the value of input quantities and power supply voltage are proper and within the permissible variation limits.

1.5 - Outputs Loading

Must be compatible with their declared performance.

1.6 - Protection Earthing

When earthing is required, carefully check its effectiveness.

1.7 - Setting and Calibration

Carefully check the proper setting of the different functions according to the configuration of the protected system, the safety regulations and the co-ordination with other equipment.

1.8 - Safety Protection

Carefully check that all safety means are correctly mounted, apply proper seals where required and periodically check their integrity.

1.9 - Handling

Notwithstanding the highest practicable protection means used in designing M.S. electronic circuits, the electronic components and semiconductor devices mounted on the modules can be seriously damaged by electrostatic voltage discharge which can be experienced when handling the modules.

The damage caused by electrostatic discharge may not be immediately apparent but the design reliability and the long life of the product will have been reduced. The electronic circuits produced by M.S. are completely safe from electrostatic discharge (8 KV IEC 255.22.2) when housed in their case; withdrawing the modules without proper cautions expose them to the risk of damage.

1.10 - Maintenance

Make reference to the instruction manual of the Manufacturer; maintenance must be carried-out by specially trained people and in strict conformity with the safety regulations.

1.11 - Waste Disposal of Electrical & Electronic Equipment

(Applicable throughout the European Union and other European countries with separate collection program).

This product should not be treated as household waste when you wish dispose of it. Instead, it should be handed over to an applicable collection point for the recycling of electrical and electronic equipment.

By ensuring this product is disposed of correctly, you will help prevent potential negative consequence to the environment and human health, which could otherwise be caused by inappropriate disposal of this product. The recycling of materials will help to conserve natural resource.

1.12 - Fault Detection and Repair

Internal calibrations and components should not be altered or replaced.

For repair please ask the Manufacturer or its authorized Dealers.

Misapplication of the above warnings and instruction relieves the Manufacturer of any liability.

2. General

Input quantities are supplied via isolated converters with (0 - 20)mA output (overload 25mA).
For best accuracy and reliability we recommend to use MHIT measuring converters for supply of input.

A) Current measurement

- 1 Input 0 - 20mA $\equiv$ 0 - 1In
- 1 Input 0 - 20(25)mA $\equiv$ 0 - 10(12.5)In
- Measuring range 0 - 12,5 times the rated input current (12,5In)
- Resolution 16 bits

B) Line voltage measurement

- 1 Input 0 - 40mA $\equiv$ 0 - 2Un
- Measuring range 0 - 2 times the rated input voltage (2xUn)
- Resolution 12 bits

C) Frame earth fault current measurement

- 1 Input 0 - 20mA (25mA) $\equiv$ 0 - 1In (0 - 1,25In)
- Measuring range 0 - 1 times the rated input current
- Resolution 12 bits

D) Frame voltage measurement

- 1 Input 0 - 40mA $\equiv$ 0 - 2Un
- Measuring range 0 - 2 times the rated input voltage (2xUn)
- Resolution 12 bits

Make electric connection in conformity with the diagram reported on relay's enclosure.
Check that input currents and voltages are same as reported on the diagram and on the test certificate.
The auxiliary power is supplied by a built-in fully isolated and self-protected unit.


2.1 - Power Supply

The relay can be fitted with two different types of **power supply**:

Type1 -	24V(-20%) / 110V(+15%) a.c.	Type 2 -	80V(-20%) / 220V(+15%) a.c.
	24V(-20%) / 125V(+20%) d.c.		90V(-20%) / 250V(+20%) d.c.


Before energizing the unit check that supply voltage is within the allowed limits.

3. Front Panel

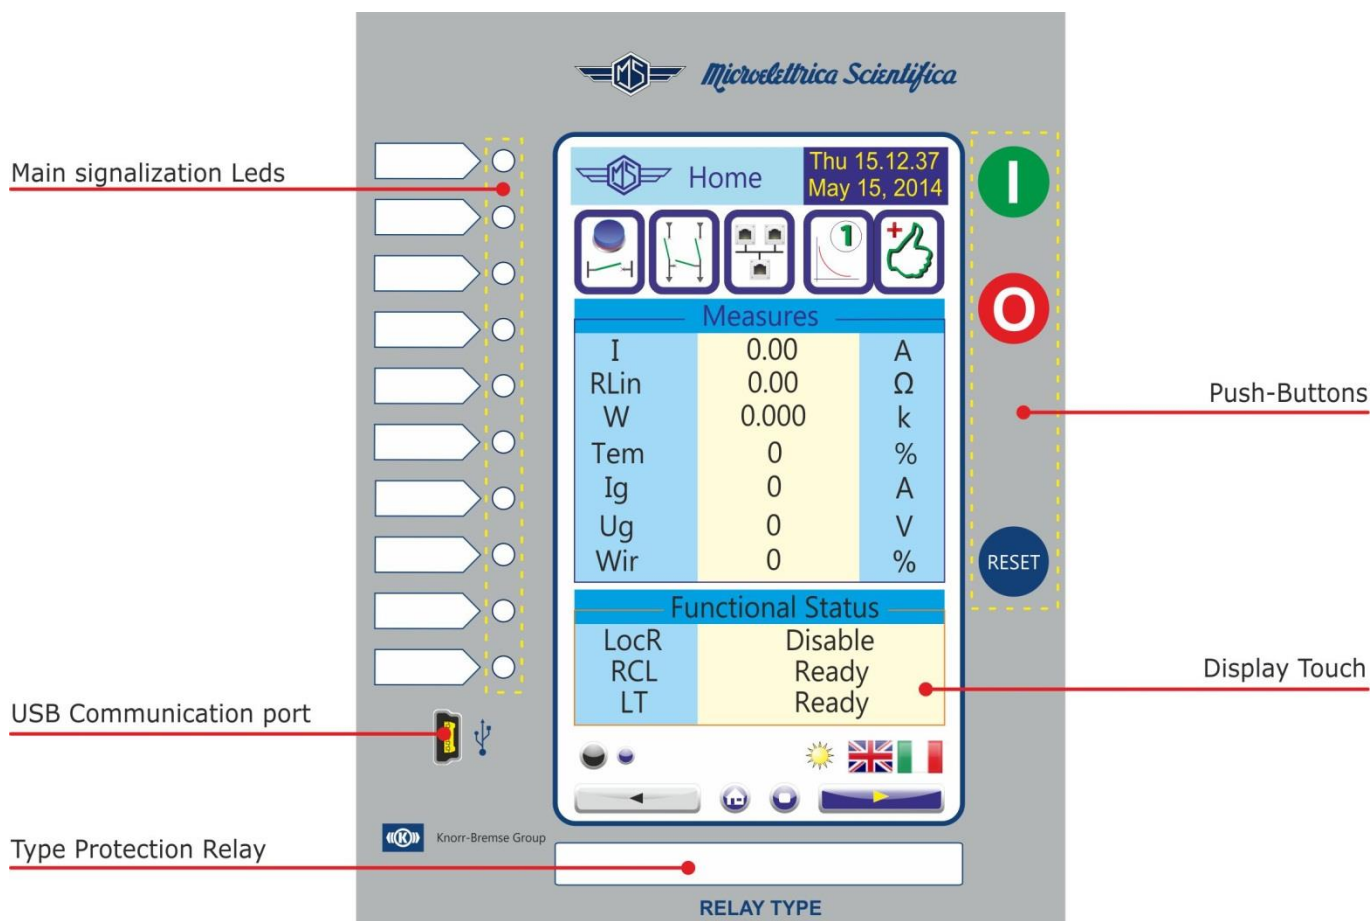

4. Keyboard and Display

The 480x272 pixel LCD Touch display the available information (menu, etc.).

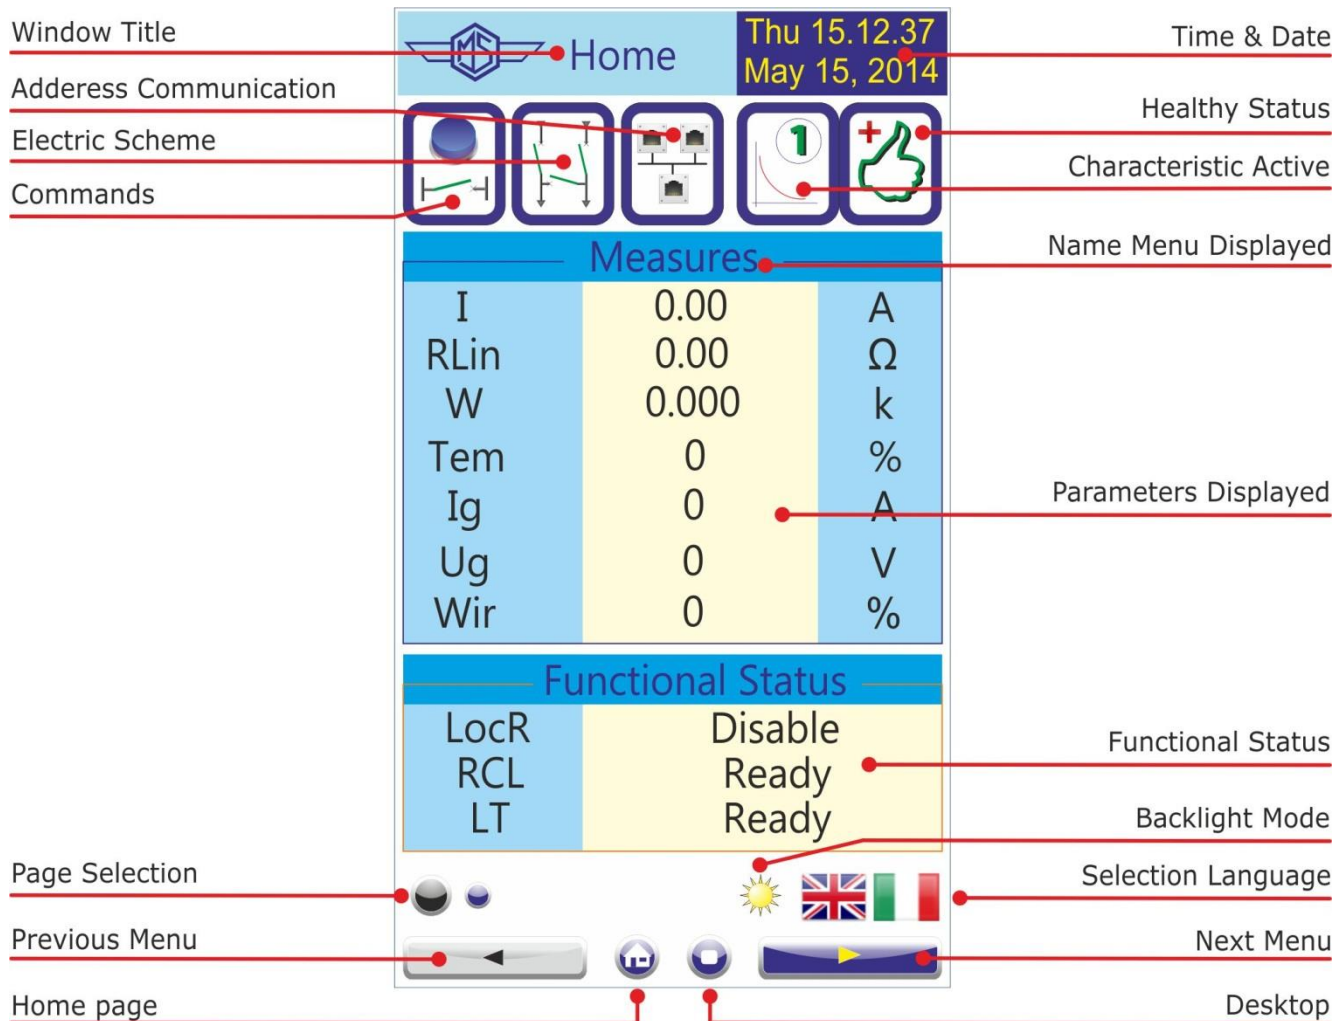

C/B Close control



C/B Open control



Reset

5. Icons of Main Menu (Desktop)

	Energy	Energy Measurements
	ReadOnlyCnt	Total Counter (Read Only Counter)
	Events	Event Recording
	Commands	Local Commands
	Counters	Partial Counters (Resettable Counter)
	Last Trips	Last Trip
	Settings	Function Settings
	Systems	System Settings
	Healthy	Diagnostic Information
	InpCfg	<i>Inputs Configuration</i>
	InpView	<i>Inputs View</i>
	Info	General Info
	OutCfg	<i>Outputs Configuration</i>
	OutView	<i>Outputs View</i>
	User Var	User Variable
	Oscillo	Oscillographic recording (Not Available)
	FW Version	Firmware version
	Display Cal	Display Calibration

Page 1




Page 2



6. Signalization

Ten signal leds are provided:

N°	Colour	Default Status
Led 1	Green	Not Assigned
Led 2	Red	Not Assigned
Led 3	Yellow	Not Assigned
Led 4	Yellow	Not Assigned
Led 5	Yellow	Not Assigned
Led 6	Red	Not Assigned
Led 7	Red	Not Assigned
Led 8	Red	Not Assigned
Led 9	Red	Not Assigned
Led 10	Green	Not Assigned



In case of auxiliary power supply failure the status of the leds is recorded and reproduced when power supply is restored.

Reset from Illuminated status is manual (see § Commands)

6.1 – Display of the last trip

When a generic function trip, the display shows a window indicating the last function that has tripped and the number of events that are stored in the memory. The display will show this window until the reset button or external reset are operated.



Number of trip before reset.

Function tripped

Press to erase visualization


Press to visualization trip parameter

6.2 - Leds Configuration

For Leds' programming (only via MScCom2) operate as follows:

Open "**MSCOM2**" program and connect to the relay.

Select "Change Windows" from "Menu" button



Select "Led Setting"



The window for led configuration will show:

ID	Name	Link enable	Status	Light prog.	Funct. Mode	Functions
1	Led 1 (Read only)	Not linked	Light off	Light on	Volatile	11>
2	Led 2 (Read only)	Not linked	Light off	Light on	Volatile	11>

6.2.1 - Name

Led name – for leds position see picture

6.2.2 - Link enable

<i>Linked</i>	=	Enable to operate
<i>No Linked</i>	=	Disable

6.2.3 - Status

<i>Light-OFF</i>	=	Normal condition	
<i>Light-ON</i>	=	When cause appear led is illuminated	See "Light Prog"
<i>Flashing</i>	=	When cause appear led is flashing	

6.2.4 - Light Prog.

<i>Light-ON</i>	=	When cause appear led is illuminated
<i>Flashing</i>	=	When cause appear led is flashing

6.2.5 - Funct. Mode

<i>Volatile</i>	=	When cause disappear led turn-off (Not memorized)
<i>Latched</i>	=	When cause disappear led remain illuminated (memorized)

6.2.6 - Functions

Select the function assigned to specific led (see table 1).
It's possible to configure only one function for each led.
For configuration multiple functions use "UserVar" function.

6.2.7 - Table 1

T>	Tal T>	(alarm) (trip)	Thermal element
1I>	1I> t1I>	(Start) (Trip)	First overcurrent element
2I>	2I> t2I>	(Start) (Trip)	Second overcurrent element
3I>	3I> t3I>	(Start) (Trip)	Third overcurrent element
4I>	4I> t4I>	(Start) (Trip)	Fourth overcurrent element
1dI	1dI t1dI	(Start) (Trip)	First Current step element
2dI	2dI t2dI	(Start) (Trip)	Second Current step element
1di/dt	1di/dt t1di/dt	(Start) (Trip)	First Current rate of rise element
2di/dt	2di/dt t2di/dt	(Start) (Trip)	Second Current rate of rise element
Rapp	Rapp	(Trip)	Impedance monitoring – di/dt dependence
Iapp	Iapp		Current monitoring with di/dt dependence
1Ig	1Ig t1Ig	(Start) (Trip)	First instantaneous Frame Fault element First time delayed Frame Fault element
2Ig	2Ig t2Ig	(Start) (Trip)	Second Frame Fault element
RCL	RCL cmd ARP ARF ARL	(Trip)	Reclosure Shot command Autoreclosure in progress Autoreclosure Failure Autoreclosure Lock-out
1U>	1U> t1U>	(Start) (Trip)	First overvoltage element
2U>	2U> t2U>	(Start) (Trip)	Second overvoltage element
1U<	1U< t1U<	(Start) (Trip)	First undervoltage element
2U<	2U< t2U<	(Start) (Trip)	Second undervoltage element
RT	RT tRT	(Trip) (Start)	First Instantaneous Remote Trip First Time delayed Remote Trip
Wi	tWi>		Circuit breaker maintenance level
TCS	tTCS	(Trip)	Time delayed Trip Circuit Supervision
IRF	IRF tIRF	(Start) (Trip)	Time delayed Internal relay Fault Instantaneous Internal relay Fault
RTX	RTX tRTX	(Trip) (Start)	Second Instantaneous Remote Trip Second Time delayed Remote Trip
CB-L	CB-L		C/B reclose Lock-out
BF	BF		Breaker Failure
Wh	+ Wh - Wh		Imported Energy counter Pulse Exported Energy counter Pulse

L/R CB Cmds	Open C/B Close C/B LocRemInc missCBOpe	<i>Open C/B command</i> <i>Close C/B command</i> <i>Local / Remote Inconsistency</i> <i>Missed C/B opening (Digital input missing)</i>		
LT	LTPb LTP LTF LT cmd (Trip)	<i>Output to operate an external flashing lamp signalling line test in progress</i> <i>Line Test in progress</i> <i>Line Test Failed</i> <i>Line Test Command</i>		
	Gen.Start Gen.Trip	<i>Start Generic</i> <i>Trip Generic</i>		
	UserTriggerOscillo	<i>User Variable for Oscillographic Recording</i>		
	UserVar<0> to UserVar<24>	<i>User Variable</i>		
	Vcc	<i>Reserved</i>		
	Gnd	<i>Reserved</i>		
	ResLog	<i>Reset signal logic</i>		
	P1 P2	<i>Push-button Open</i> <i>Push-button Close</i>		
	0.D1 0.D1Not to 0.D4 0.D4Not	<i>Digital Input "0.D1"</i> <i>Digital Input "0.D1"</i> <i>activated</i> <i>deactivated</i>		<i>Digital Input on Main Relay</i>
	1.D1 1.D1Not to 1.D15 1.D15Not	<i>Digital Input "0.D4"</i> <i>Digital Input "0.D4"</i> <i>activated</i> <i>deactivated</i>		
	2.D1 2.D1Not to 2.D15 2.D15Not	<i>Digital Input "1.D1"</i> <i>Digital Input "1.D1"</i> <i>activated</i> <i>deactivated</i>		<i>Digital input on Expansion Board</i>
	0.R1 to 0.R6	<i>Digital Input "1.D15"</i> <i>Digital Input "1.D15"</i> <i>activated</i> <i>deactivated</i>		
	1.R1 to 1.R14	<i>Digital Input "2.D1"</i> <i>Digital Input "2.D1"</i> <i>activated</i> <i>deactivated</i>		<i>Digital input on Expansion Board</i>
	2.R1 to 2.R14	<i>Digital Input "2.D10"</i> <i>Digital Input "2.D10"</i> <i>activated</i> <i>deactivated</i>		
	0.R1 to 0.R6	<i>Output relays on Main Relay</i>		
	1.R1 to 1.R14	<i>Output relays on Expansion Board</i>		
	2.R1 to 2.R14	<i>Output relays on Expansion Board</i>		

6.3 - Example: Change settings for "Led5"

Change settings for "**LED5**" : "Enable", "Flashing", "Latched", "1I>".

Led 1 = Read only (see § Signalization on Main Relay)
Led 2 =
Led 3 =
Led 4 =

Led 5 = are provided in signalization module

to

Led 53 =

Main Windows:


ID	Name	Link enable	Status	Light prog.	Funct Mode	Functions
1	Led 1 (Read only)	Not linked (0)	Light off (0)	Light on (0)	Volatile (0)	1I> (0)
2	Led 2 (Read only)	Not linked (0)	Light off (0)	Light on (0)	Volatile (0)	1I> (0)
3	Led 3 (Read only)	Not linked (0)	Light off (0)	Light on (0)	Volatile (0)	1I> (0)
4	Led 4 (Read only)	Not linked (0)	Light off (0)	Light on (0)	Volatile (0)	1I> (0)
5	Led 5	Not linked (0)	Light off (0)	Light on (0)	Volatile (0)	1.D1

6.3.1 - "Enable"

Select "**Link enable**" related to "Led 5" and press right button on mouse, select "Value change":




Select "**Linked**" from combo box and press "OK" (if Password is request, see § Password):

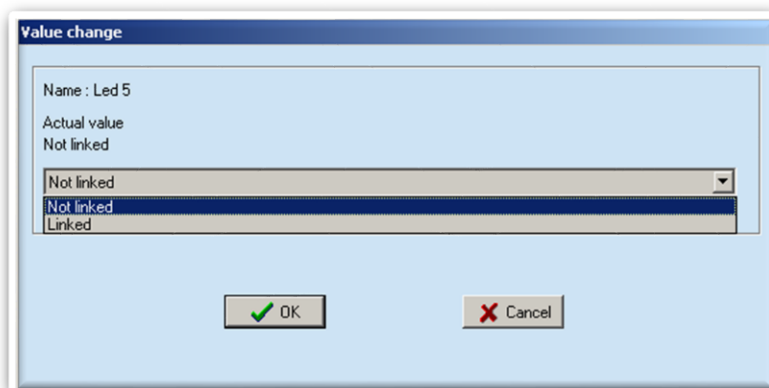


6.3.2 - "Flashing"

Select "**Light prog**" related to Led 5 and press right button on mouse, select "**Value change**":

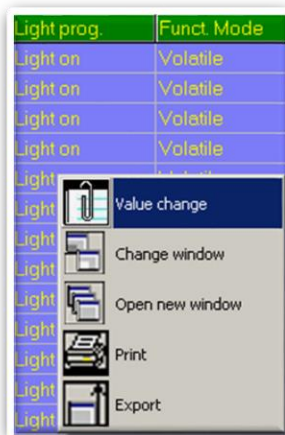

Select "**Flashing**" from combo box and press "OK" (if Password is request, see § Password):

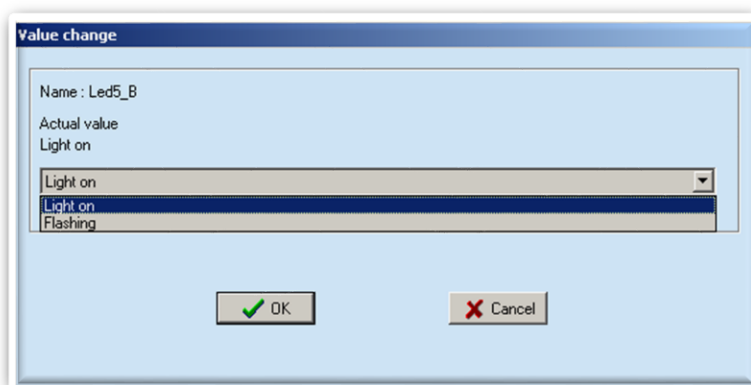


6.3.3 - "Latched"

Select "**Latched**" related to Led 5 and press right button on mouse, select "**Value change**":




Select "**Latched**" from combo box and press "OK"
(if Password is request, see § Password):

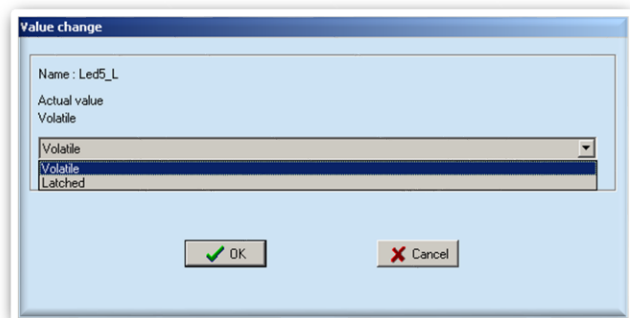


6.3.4 - "Functions"

Select "**Functions**" related to Led 5 and press right button on mouse, select "**Value change**":

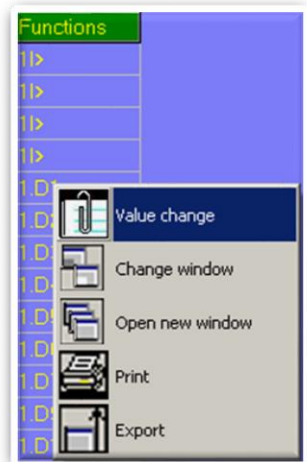

Select “**1I>**” from combo box and press “OK” (if Password is request, see § Password):

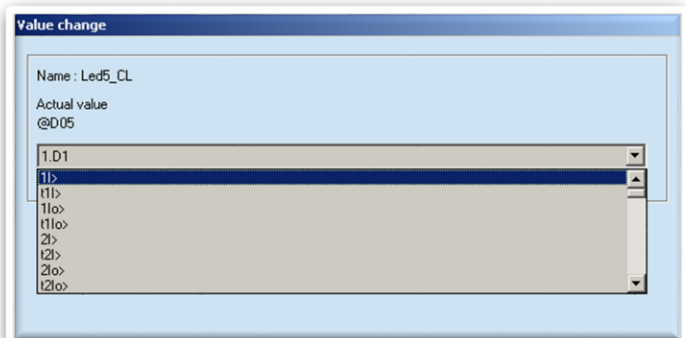

7. User Variables

The "**USER VARIABLE**" is a result of a logical operation (Or, AND, ecc...), it can be used like other logical output. This operation is possible only via "MSCom2" software.

Name	User descr.	Linked functions	OpLogic	Timer	Timer type	Logical status
------	-------------	------------------	---------	-------	------------	----------------

7.1 - Name

Internal progressive name

7.2 - User Descr.

Custom identification label for user variable

7.3 - Linked functions

Selection functions

7.4 - OpLogic

Operation Logic = [None, OR, AND, XOR, NOR, NAND, NOT, Ff-SR, Counter, Rise-Up, Fall-Down]

7.5 - Timer

Time delay (0-10)s, step 0.01s

7.6 - Timer type

<i>Delay</i>	= Add a delay on output activation. The "Timer" is edge triggered on rise edge.
<i>Monostable P</i>	= Monostable Positive , the positive length of set signal is determinate by the timer
<i>Monostable N</i>	= Monostable Negative , the negative length of set signal is determinate by the timer
<i>Blinking</i>	= The output blink at the specify period
<i>Delay-Fall-Down</i>	= Delay to change edge


7.7 - Logical status

"User Variable" Logical status


7.8 - Example: Setting "User Variable"

Open "**MSCOM2**" program and connect to the relay.

Select "Change Windows" from "Menu" button



Select "**USER VARIABLE**"

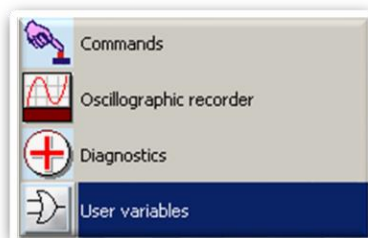


Setting for "**USERVAR<0>**" : "**Current Trip**", "**1I>,2I>,3I>**", "**OR**", "**1**", "**Monostable**".


ID	Name	User descr.	Linked functions	OpLogic	Timer	Timer type	Logical status
1	User Trigger Oscillo	User Trigger Oscillo		None	0	Delay	0
2	UserVar <0>	Current trip	1I>,2I>,3I>	OR	1	Monostable	0

7.8.1 - "User description" (User descr.)

Select "**User descr**" related to "UserVar<0>" and press right button on mouse, select "Value change":




Insert "**Current Trip**" into box and press "OK":


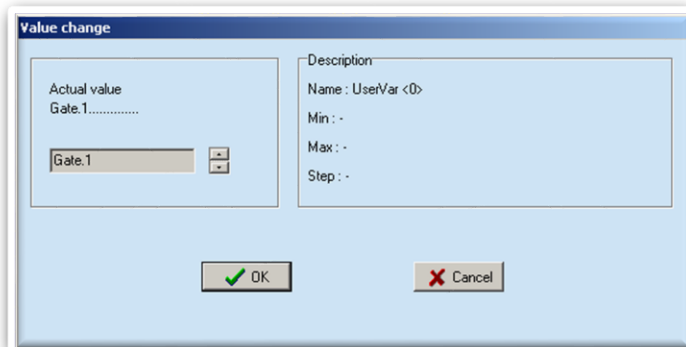


7.8.2 - "Linked Functions"

Select "**Linked Functions**" related to "UserVar<0>" and press right button on mouse, select "Value change":




Select "**1I>, 2I>, 3I>**" from "Available" box via push-button "<Add", and press "OK".
For remove functions, use push-button ">Remove".

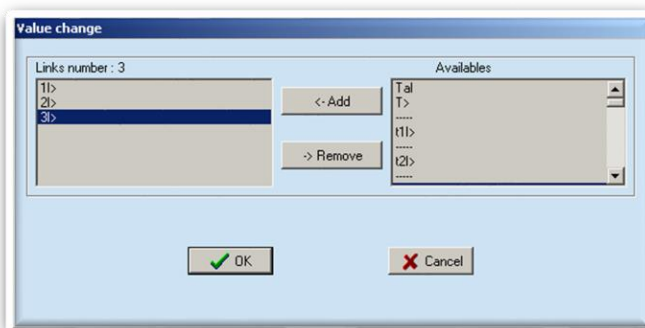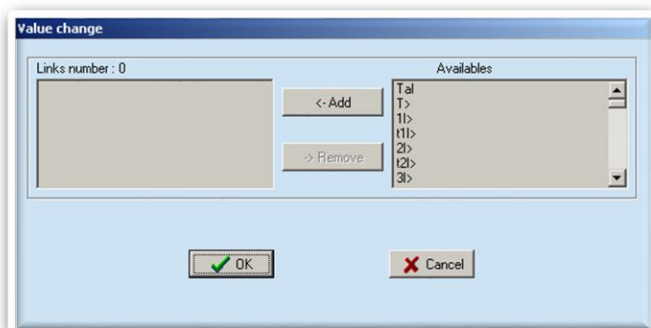


7.8.3 - "Operation Logic" (Oplogic)

Select "**Oper Logic**" related to "UserVar<0>" and press right button on mouse, select "Value change":




Insert "**OR**" into box and press "OK":

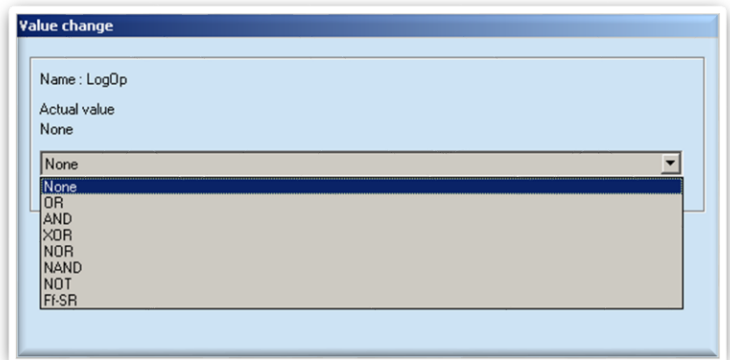


7.8.4 - "Timer"

Select "**Timer**" related to "UserVar<0>" and press right button on mouse, select "Value change":




Select "**1**" into box and press "OK":

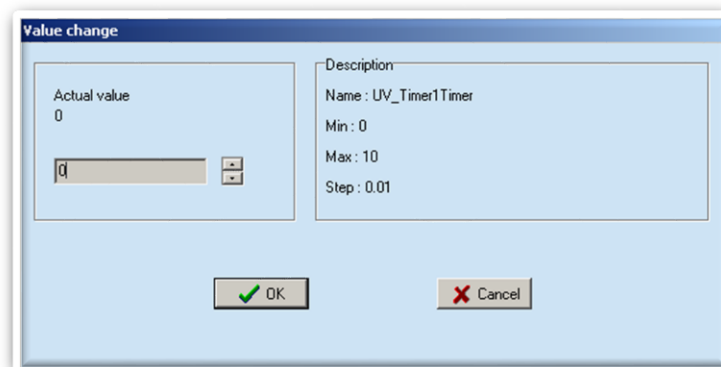


7.8.5 - "Timer type"

Select "**Timer**" related to "UserVar<0>" and press right button on mouse, select "Value change":




Select "**Monostable**" into box and press "OK":

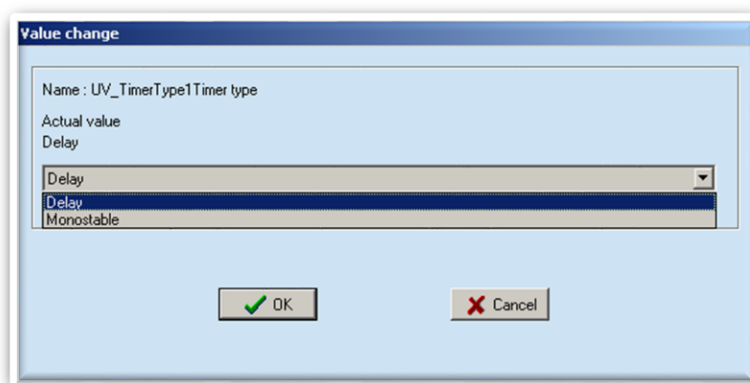

8. Home

In the "Home" page, is displayed the real time values measured during the normal operation.

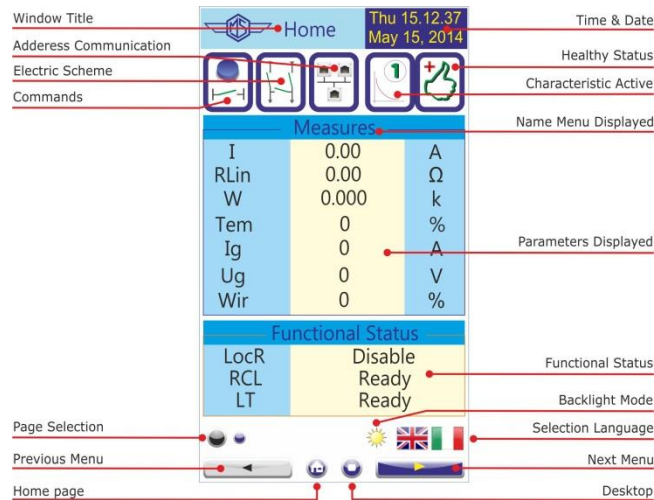

Time and Date		Displayed Current Date and Time	
Breaker Status (When pressed opens the menu commands)		Breaker Open	
Electric Scheme		Shows electric scheme	
Communication (When pressed opens the menu commands)		Communication options	
Characteristic Active (When pressed opens the menu characteristics)		Characteristic "1" Active	
Healthy (When pressed opens the menu Healthy)		Normal condition	
Page Selection		Page Active	
Menu Selection		Menu active	
Backlight Mode		Backlight always active	

Parameters displayed in the Home page:


→ I	(0 ± 9999)	A	Line current
→ RLin	(0 ÷ 9999)	Ω	Line resistance
→ W	(0.00÷99.99÷999.9÷9999999)	kW	Power
→ Tem	(0 ÷ 9999)	%T	Thermal status as % of the full load continuous operation temperature Tn
→ Ig	(0 ± 9999)	A	Frame to ground fault current
→ Ug	(0 ± 9999)	V	Frame to ground fault voltage
→ Wir	(100 ÷ 0)	%W	Amount still remaining of permissible interruption energy before Circuit Breaker maintenance is requested.
→ Vv	(0 ± 9999)	V	Voltage before C/B
→ Vm	(0 ± 9999)	V	Voltage after C/B
→ A/ms	(0 ÷ 9999)		Current rate of raise
→ Rapp	(0 ÷ 1000)	Ω	Impedance monitoring

9. Commands

“**Commands**” allow to operate from relay front face controls like Thermal Memory reset, Leds reset, etc.

Menu		Description	Password
→	Led Clear	Reset of signal Leds	No
→	Relays Clear	Manual reset of output relays	No
→	Breaker Close	Manual C/B closing (conditioned by Password)	Yes
→	Breaker Open	Manual C/B opening (conditioned by Password)	Yes
→	CB Unlock	Unlock the C/B reclosure	Yes
→	HistFail Clear	Reset of Internal Failure Historic records	Yes
→	Reset Term	Reset to zero of the accumulations relevant to Thermal Image and Interruption Energy.	Yes
→	Leds Test	Signal Leds test	No
→	Event Clear	Manual reset of Events	Yes
→	LTrip Clear	Manual reset of Last Trips	Yes
→	Counter Clear	Manual reset of Counters	Yes
→	Energy Clear	Manual reset of Energy	Yes

To operate one command by the Front Face, proceed as follows (Led Reset in the present example):

- 
 - Press “” for access to the “Desktop” menu with icons.
- 
 - Press “” for access to the menu.
- 
 - Press the Blue *pushbutton* “” to execute the command. (if Password is request, see § Password).
- 
 - The blue *pushbutton* “” change into green “” and execute the command. When command has been executed the display return in the normal position.

10. Maximum Values (available only via MCom2)

Maximum demand values recorded starting from 100ms after closing of main Circuit Breaker (updated any time the breaker closes).

→ I	(0 ± 9999)	A	Line current
→ RLin	(0 ÷ 9999)	Ω	Line resistance
→ W	(0.00÷99.99÷999.9÷99999999)	kW	Power
→ Tem	(0 ÷ 9999)	%T	Thermal status as % of the full load continuous operation temperature Tn
→ Ig	(0 ± 9999)	A	Frame to ground fault current
→ Ug	(0 ± 9999)	V	Frame to ground fault voltage
→ Wir	(100 ÷ 0)	%W	Amount still remaining of permissible interruption energy before Circuit Breaker maintenance is requested.
→ Vv	(0 ± 9999)	V	Voltage before C/B
→ Vm	(0 ± 9999)	V	Voltage after C/B
→ A/ms	(0 ÷ 9999)		Current rate of raise
→ Rapp	(0 ÷ 1000)	Ω	Impedance monitoring

11. Energy

Real time energy measurements

Display	→ + kWh	(0 - 9999999)	Exported Energy
	→ - kWh	(0 - 9999999)	Imported Energy


- 1**



- Press “” for access to the “Desktop” icons.
- 2**



- Press “” for access to the Energy parameters.
- 3**



- Display of Real time Energy measurements.

12. Last Trips



Display of the function which caused the tripping of the relay plus values of the measurement at the moment of tripping. The last 20 events are recorded.

The memory buffer is refreshed at each new relay tripping (FIFO logic).

→ I	(0 ÷ 9999)	A	Line current
→ RLin	(0 ÷ 9999)	Ω	Line Resistance
→ W	(0.00 ÷ 99.99 ÷ 999.9 ÷ 9999999)	kW	Power
→ Tem	(0 ÷ 9999)	%T	Thermal status as % of the full load continuous operation temperature Tn
→ Ig	(0 ÷ 9999)	A	Frame to ground fault current
→ Ug	(0 ÷ 9999)	V	Frame to ground fault voltage
→ Wir	(100 ÷ 0)	%W	Amount still remaining of permissible interruption energy before Circuit Breaker maintenance is requested.
→ Vv	(0 ÷ 9999)	V	Voltage before C/B
→ Vm	(0 ÷ 9999)	V	Voltage after C/B
→ A/ms	(0 ÷ 9999)		Current rate of raise
→ Rapp	(0 ÷ 1000)	Ω	Impedance monitoring
→ DI-1	(0 ÷ 9999)	A	First current step element
→ DI-2	(0 ÷ 9999)	A	Second current step element

Erase

→ See § Commands

- 
 - Press " " to access to the "Desktop" menu with icons.
- 
 - Press " " to access to the Last Trip list.
- 
 - Display list.
 - Press selected Trip recorded.
- 
 - Select "MEASURE".
- 
 - The display shows the recorded value at the moment of trip.


13. Counters

Partial counters of the number of operations for each of the relay functions.

Display	→ T>	0	Operations counters	Thermal Image
	→ 1I>	0	Operations counters	First overcurrent element
	→ 2I>	0	Operations counters	Second overcurrent element
	→ 3I>	0	Operations counters	Third overcurrent element
	→ 4I>	0	Operations counters	Fourth overcurrent element
	→ 1dI	0	Operations counters	First current step element
	→ 2dI	0	Operations counters	Second current step element
	→ 1didt	0	Operations counters	First current rate of rise element
	→ 2didt	0	Operations counters	Second current rate of rise element
	→ Rapp	0	Operations counters	Impedance monitoring (di/dt dependence)
	→ Iapp	0	Operations counters	Current monitoring with di/dt dependence
	→ 1Ig	0	Operations counters	First Frame Fault element
	→ 2Ig	0	Operations counters	Second Frame Fault element
	→ RCL	0	Operations counters	Automatic Reclosure
	→ LT	0	Operations counters	Automatic Line Test
	→ 1U>	0	Operations counters	First Overvoltage element
	→ 2U>	0	Operations counters	Second Overvoltage element
	→ 1U<	0	Operations counters	First Undervoltage element
	→ 2U<	0	Operations counters	Second Undervoltage element
	→ RT	0	Operations counters	First Remote Trip
	→ IRF	0	Operations counters	Internal Relay Fault
	→ TCS	0	Operations counters	Trip Circuit Supervision
	→ BrkF	0	Operations counters	Breaker failure to open
	→ Wi	0	Operations counters	Circuit Breaker maintenance alarm
	→ AutOp	0	Operations counters	Automatic C/B Open
	→ AutCL	0	Operations counters	Automatic C/B Close
	→ ManOp	0	Operations counters	Manual C/B Open
	→ ManCL	0	Operations counters	Manual C/B Close
	→ OvrOp	0	Operations counters	Overall C/B Open (Automatic + Manual)
	→ OvrCL	0	Operations counters	Overall C/B Close (Automatic + Manual)
	→ RTX	0	Operations counters	Second Remote Trip

Erase → See § Commands
(By the interface program "MSCom2" it is possible to individually reset the counters and set an initial starting number)

1




• Press "Desktop" for access to the "Desktop" menu with icons.

2



• Press "Counters" for access to the counters list.

3



• The display show the list.

14. ReadOnlyCnt

Counters of the total number of operation of each individual function. These counters cannot be reset

Display	→ T>	0	Operations counters	Thermal Image
	→ 1I>	0	Operations counters	First overcurrent element
	→ 2I>	0	Operations counters	Second overcurrent element
	→ 3I>	0	Operations counters	Third overcurrent element
	→ 4I>	0	Operations counters	Fourth overcurrent element
	→ 1dI	0	Operations counters	First current step element
	→ 2dI	0	Operations counters	Second current step element
	→ 1didt	0	Operations counters	First current rate of rise element
	→ 2didt	0	Operations counters	Second current rate of rise element
	→ Rapp	0	Operations counters	Impedance monitoring (di/dt dependence)
	→ Iapp	0	Operations counters	Current monitoring with di/dt dependence
	→ 1Ig	0	Operations counters	First Frame Fault element
	→ 2Ig	0	Operations counters	Second Frame Fault element
	→ RCL	0	Operations counters	Automatic Reclosure
	→ LT	0	Operations counters	Automatic Line Test
	→ 1U>	0	Operations counters	First Overvoltage element
	→ 2U>	0	Operations counters	Second Overvoltage element
	→ 1U<	0	Operations counters	First Undervoltage element
	→ 2U<	0	Operations counters	Second Undervoltage element
	→ RT	0	Operations counters	First Remote Trip
	→ IRF	0	Operations counters	Internal Relay Fault
	→ TCS	0	Operations counters	Trip Circuit Supervision
	→ BrkF	0	Operations counters	Breaker failure to open
	→ Wi	0	Operations counters	Circuit Breaker maintenance alarm
	→ AutOp	0	Operations counters	Automatic C/B Open
	→ AutCL	0	Operations counters	Automatic C/B Close
	→ ManOp	0	Operations counters	Manual C/B Open
	→ ManCL	0	Operations counters	Manual C/B Close
	→ OvrOp	0	Operations counters	Overall C/B Open (Automatic + Manual)
	→ OvrCL	0	Operations counters	Overall C/B Close (Automatic + Manual)
	→ RTX	0	Operations counters	Second Remote Trip

1




• Press “” for access to the “Desktop” menu with icons.

2



• Press “” for access to the counters list.

3



• The display shows the list.

15. Events

Display of the function which caused any of the following events: - *Status change of digital Inputs/Outputs.* - *Start of protection functions* – *Trip of protection function* – *Function reset.*

The last 50 events are recorded at pick-up (rise) or drop-out (fall).

The memory buffer is updated at each new event.

Erase

→ See § Commands

- 1**



- Press “” to access to the “Desktop” menu with icons.
- 2**



- Press “” to access at the list.
- 3**



- Select the Events to show.
- 4**



- Display selected Event.

15.1 – Events on display


Functions	Events Displayed	Events Description MScom2		Status	
T>	Tal T>	Alarm Trip	Thermal Image T>	Rise	
				Rise	Fall
1I>	1I> t1I>	Start Trip	First overcurrent element F50-51	Rise	Fall
				Rise	Fall
2I>	2I> t2I>	Start Trip	Second overcurrent element F50-51	Rise	Fall
				Rise	Fall
3I>	3I> t3I>	Start Trip	Third overcurrent element F50-51	Rise	Fall
				Rise	Fall
4I>	4I> t4I>	Start Trip	Fourth overcurrent element F50-51	Rise	Fall
				Rise	Fall
1dI	1dI t1dI	Start Trip	First Current Step Element	Rise	Fall
				Rise	Fall
2dI	2dI t2dI	Start Trip	Second Current Step Element	Rise	Fall
				Rise	Fall
1di/dt	1di/dt t1di/dt	Start Trip	First Current Rate of Rise Element	Rise	Fall
				Rise	Fall
2di/dt	2di/dt t2di/dt	Start Trip	Second Current Rate of Rise Element	Rise	Fall
				Rise	Fall
Rapp	Rapp	Trip	Impedance monitoring-di/dt dependence	Rise	Fall
Iapp	Iapp	Trip	Current monitoring-di/dt dependence	Rise	Fall
1Ig	1Ig t1Ig	Start Trip	First Frame Fault Element	Rise	Fall
				Rise	Fall
2Ig	2Ig t2Ig	Start Trip	Second Frame Fault Element	Rise	Fall
				Rise	Fall
RCL	RCLcmd ARP ARF ARL	Autoreclosure shot Autoreclosure in Progress Autoreclosure Failed Autoreclosure Lockout		Rise	
				Rise	
				Rise	
				Rise	
LT	LTcmd	Line Test Command		Rise	
1U>	1U> t1U>	Start Trip	First Overvoltage Element F59	Rise	
				Rise	
2U>	2U> t2U>	Start Trip	Second Overvoltage Element F59	Rise	
				Rise	
1U<	1U< t1U<	Start Trip	First Undervoltage Element F59	Rise	Fall
				Rise	Fall
2U<	2U< t2U<	Start Trip	Second Undervoltage Element F59	Rise	Fall
				Rise	Fall
Wi	tWi>	Circuit breaker maintenance level		Rise	
TCS	TCS tTCS	Start Trip	trip coil supervision	Rise	
				Rise	Fall
IRF	IRF tIRF	Start Trip	Internal Relay Failure	Rise	
				Rise	
RT	Start RT Trip RT	Start Trip	First element Remote Trip	Rise	
				Rise	
RTX	Start RTX Trip RTX	Start Trip	Second element Remote Trip	Rise	
				Rise	
BF	BF	Breaker Failure		Rise	Fall
L/R C/B Cmds	CB Open CB Close LocRemInc	Circuit Breaker (CB) intentional open Circuit Breaker (CB) intentional close Local Remote inconsistent		Rise	
				Rise	
CB-L	CB-L CICBLTreq CICBLTfail CICBLTok	Breaker close Blocked Required Line Test for Intentional CB Close Line Test for Intentional CB Close Failed Line Test for Intentional CB Close Successful		Rise	
				Rise	
				Rise	
				Rise	

Functions	Events Displayed	Events Description MScom2	Status	
	Vcc	Reserved	Rise	Fall
	Gnd	Reserved	Rise	Fall
	Gen.Start	Start Generic	Rise	Fall
	0.D0	Digital Input	Rise	Fall
	0.D4			
	1.D1	Digital input	Rise	Fall
	1.D15			
	2.D1	Digital input	Rise	Fall
	2.D15			
	0.R1	Output relay	Rise	Fall
	0.R6			
	1.R1	Output relay	Rise	Fall
	1.R14			
	2.R1	Output relay	Rise	Fall
	2.R14			
	UpDateMon	Update Monitor	Rise	Fall
	IPU boot	IPU boot	Rise	

16. Systems (System Parameters)

Setting of system parameters.

 Nominal Values	Current Input	In → 4000 A	(1 ÷ 9999)	step	1	A
		System Rated Current				
	Voltage Input	Un → 1000 V	(100 ÷ 10000)	step	10	V
		System Rated Voltage				
	Ground Current	Ign → 1000 A	(1 ÷ 9999)	step	1	A
		System Rated Ground Current				
	Ground Voltage	Ugn → 1000 V	(100 ÷ 10000)	step	10	V
		System Rated Ground Voltage				
		Rtest → 1 Ω	(1 ÷ 500)	step	1	Ω
		Line Test resistance				
 Characteristic	Characteristic-1	Available				
	Characteristic-2	Available				
	Characteristic-3	Not Available				
	Characteristic-4	Not Available				
 Factors	Not available					
 System Options	Not available					
 Comm Add Node	Communication Node Address					
 IO board config	Input/Output Board Configuration					



- Press " " to access to the "Desktop" menu with icons.



- Press " " to access to the system menu.


16.1 – Nominal Values

3



- Press icons "  ".

4



- Press the parameter to modify. (if Password is request, see § Password).


16.2 – Characteristic

3a



- Press icons "  ".

4a



- Press the characteristics that need modify.


16.3 – Comm Add Node

3b



- Press icons "  ".

4b



- Select "Address Node"

16.4 – IO board configuration

3c




- Press icons "  ".

4c



- Select "Board".

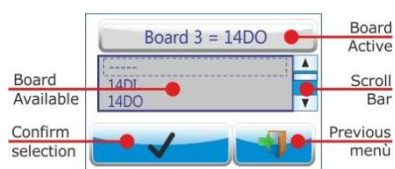

17. Settings


Two complete banks of settings of the programmable variables are available in the "**SETTING**" menu. Both "**CHARACTERISTIC-1**" and "**CHARACTERISTIC-2**" include the hereunder listed variables.

→ Communic.	Serial communication parameters
→ HMI	Leds number
→ T>	Thermal Image
→ 1I>	First overcurrent Element
→ 2I>	Second overcurrent Element
→ 3I>	Third overcurrent Element
→ 4I>	Fourth overcurrent Element
→ 1delta-I	First current step element
→ 2delta-I	Second current step element
→ 1di/dt	First current rate of rise element
→ 2di/dt	Second current rate of rise element
→ Rapp	Impedance monitoring - di/dt dependence
→ Iapp	Current monitoring with di/dt dependence
→ 1Ig	First Frame Fault element
→ 2Ig	Second Frame Fault element
→ RCL	Automatic Reclosure
→ 1U>	First Overvoltage Element
→ 2U>	Second Overvoltage Element
→ 1U<	First Undervoltage Element
→ 2U<	Second Undervoltage Element
→ Wi	Amount of Energy to reach the C/B maintenance level
→ TCS	Setting variables for Trip Circuit Supervision
→ IRF	Internal Relay Fault
→ RT	First Remote Trip
→ RTX	Second Remote Trip
→ BrkFail	Setting variables for Breaker Failure detection
→ Wh	Energy counter Pulse
→ selfTrip	
→ Oscillo	Setting variables for Oscillographic recording
→ L/R CB Cmds	C/B command Local / Remote setting
→ CB-L	Locks C/B reclosure
→ LT	Line Test
→ ExtReset	Configuration for external reset input
→ Dia C/B	Diagnostic C/B position

17.1 - Modifying the setting of variables


To modify any variable setting by the keyboard proceed as follows:

(example: change setting of element "**1I>**", from "**Is 4.000 In**" to "**Is 3.500 In**")

- 

- Press " " to access to the "Desktop" menu with icons.
 - 

- Press " " to access to the settings menu.
 - 

- Select Characteristic "**1**".
 - 

- Select function "**1I>**".

 This symbol in the list of the setting indicates that the function is enable
 - 


 - To enable function, press " "

 - To disable function, press " "


 

 - Function disabled
 - Function enabled
 - 

- Press " " to access to the level setting.
 - 

- Press the value (number) to change it.
 - Insert the password (if request).
 - Press the value (number)

 **1** Characteristic 1


 **2** Characteristic 2
 - 

- Insert "3.5"
 - Press "Confirm"

 Function

 Actual Value

 Maximum Value

 Minimum Value
 - 

- Change done.
- The icons grey indicate menu not available
- 

17.2 - Password

The password is requested any time the user wishes to modify any password protected parameter (example "1I>" menu "Setting").

The factory default password is "**1111**".

The password is only modifiable with "MCom2" software (see Manual "MCom2").

17.3 – Menu: **Comm.** (Communication)

Options	→ BRRem	19200	[9600 / 19200 / 38400]
	→ PRRem	Modbus	[Modbus / IEC103 / ModBOnTCP]

17.3.1 – Description of variables

☐ BRRem	:	RS485 remote (Rear terminal block) serial communication speed		
☐ PRRem	:	Remote communication protocol:		
		<i>Modbus</i>	= Rear Terminal Block	If present*
		<i>IEC103</i>	= Rear Terminal Block	If present*
		<i>ModBOnTCP</i>	= Rear RJ45 (Ethernet)	If present*
		<i>SerialOnEth</i>	= Rear RJ45 (Ethernet)	If present*

*RS485 and RJ45 are not available at the same time.

17.3.2 – Front Panel USB serial communication port

A Mini-USB socket is available on Relay's front face for connection. Through this port - and by the interface program available from Microelettrica Scientifica S.p.A. (MCom2 for Windows XP/Vista/7) - it is possible connect a Personal Computer to download all available information's, operate any control and program the relay; the protocol used is "**MODBUS RTU**".

17.3.3 – Cable for connection from Relay to Personal Computer

The connection cable is a standard **USB-A** /mini **USB-B**



17.3.4 – Rear serial communication port (RS485)

From the Relay's back terminal board, a RS485 ports is available for communication with SCADA system with Protocol Modbus RTU or IEC60870-5-103 (optional on request).

The communication interface allows programming all settings, operating all commands and downloading all information and records.


The physical connection can be via a normal pair of wires (RS485) or, on request, via fiber optic.

17.3.5 – Rear communication port (Ethernet with Modbus protocol)

Relay's back Ethernet connection is available for communication in Modbus protocol, the Ethernet connector is a standard RJ45 and can be connected to a PC with a Ethernet "Cross" cable, or it can be connected to a switch with a Ethernet "Patch" cable.

The default IP address is **192.168.0.100** for Modbus on TCPip (**ModBOnTCP**)

17.3.6 – Wiring the Ethernet Communication

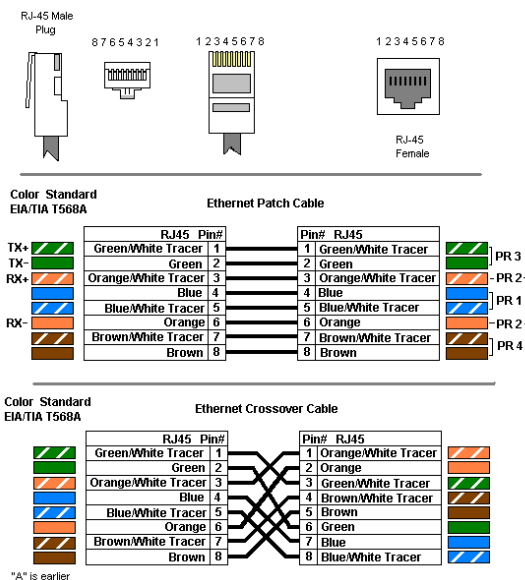

The back Ethernet connector is a standard RJ45 connector and can be wired with a normal Ethernet UTP cable in class 5 minimum.





The relay can be connected directly to a PC with a Ethernet "Cross" cable, or it can be connected to a switch with a Ethernet "Patch" cable.



17.4 - Menu: **HMI** (Human Machine Interface - customize)

17.4.1 - Led configuration

In this menu allows to customize the number of leds used (Default = 10):

1 	Press " " or " " to access to the "Desktop" menu with icons.	2 	Press " " to access to the settings menu.	3 	Select Characteristic "1".
4 	Select "HMI".	5 	Select "Options".	6 	Select "Leds".
7 	Select "10".	8 	The label change color and show the select number of leds "Leds=10".	9 	Complete setting

17.4.2 – WirCB scheme – Scheme configuration

In this configuration, you can select the scheme that appears on the Home page.


17.4.2.1 – C/B Status

1



- Press “” to access to the scheme

2




- The display shows the scheme.





17.4.2.2 – C/B Status





17.4.2.3 - Scheme types

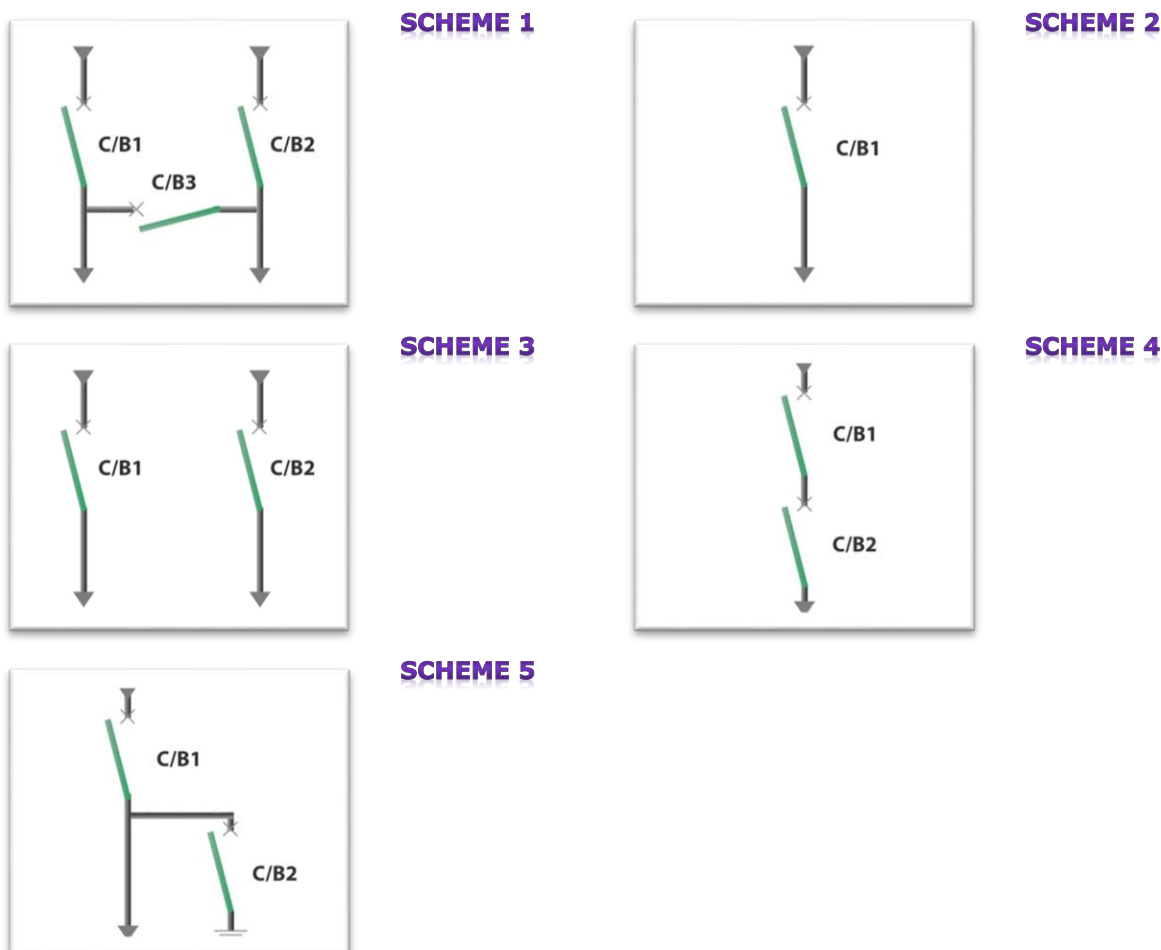

17.4.2.4 – Example – Configuration with Touch Screen

1 	Press " " or " " to access to the "Desktop" menu with icons.	2 	Press " " to access to the settings menu.	3 	Select Characteristic "1".
4 	Select "HMI".	5 	Select "Options".	6 	Select "WirCB".
7 	Select "scheme 5".	8 	The label change color and show the select number of leds "WirCB=scheme 5".	9 	Complete setting


17.4.2.5 – Example – Configuration main C/B

1 To 5	Same procedure	6 	Press " " to access to the settings menu.	7 	Select main C/B "1".
8 	The label change color and the C/B active "Main=C/B 1".	9 	Complete setting		


17.4.2.6 – Example – Configuration with MScom2 software

Open “MScom2” program and connect to the relay.


Select “**CHANGE WINDOWS**” from “Menu” button




Select “**FUNCTION SETTING**”

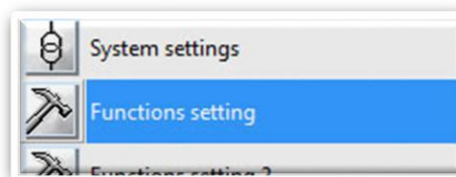


Select “**HMI**” function

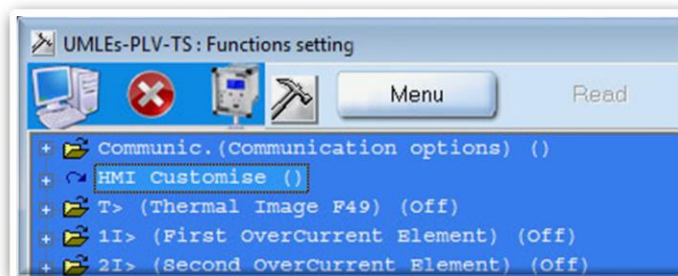





Select “**CIRCUIT BREAKER WIRING SELECTOR**”

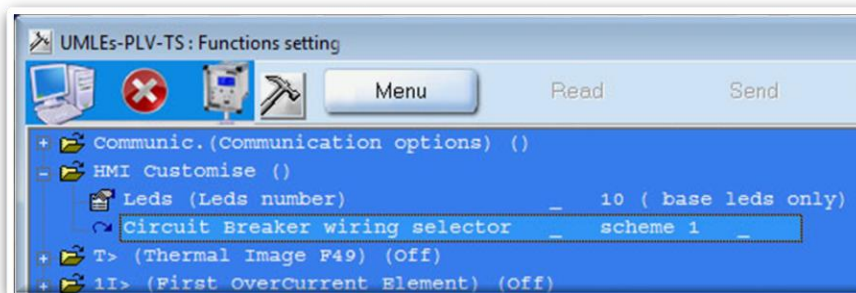

And select scheme

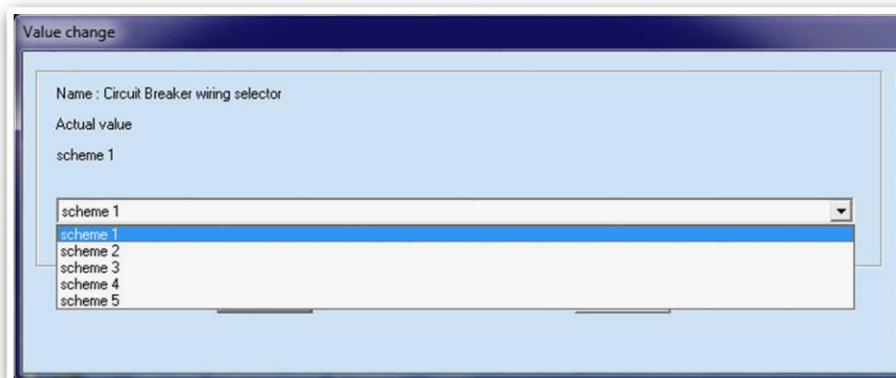

17.4.2.7 – Example – Setting Digital Inputs to C/B status with Touch Screen

1 	- Press "" - or "" - to access to the "Desktop" menu with icons.	2 	- Press "" - to access to the settings menu.	3 	Select Characteristic "C/B1".
4 	Select "Link".	5 	Load parameters.....	6 	Select "1I>" from list.
7 	- The box show "C/B1-Close= 1I>". - The function is Linked				

17.5 - Function: T> (Thermal Image F49)

Status	→	Disable		[		Disable /		Enable]
Oper.Levels	→	Tal	50	%Tn	[10 ÷ 100]	step	1	%Tn
	→	Is	1	In	[0.5 ÷ 1.5]	step	0.010	In
	→	Kt	300	min	[1 ÷ 600]	step	0.010	min

17.5.1 - Description of variables

- ☐ **Enab.** : Function enabling (Disable / Enable)
- ☐ **Tal** : Temperature prealarm level
- ☐ **Is** : Continuous admissible current
- ☐ **Kt** : Warming-up Time Constant of the load

17.5.2 - Trip and Alarm

The algorithm compares the amount of heat accumulated "T" ($\equiv i^2 \cdot t$) to the steady state amount of heat "Ts" corresponding to continuous operation at the continuously admissible current "Is".

When the ratio "T/Ts" reaches the level set for Thermal Alarm "Tal" of the max allowed heating, the relay trips accordingly

17.5.2.1 – Trip time of the Thermal Image Element


The trip time of the Thermal Image Element is a function of the current "I" flowing into the load and depends on its warming-up Time Constant "Kt", on the previous thermal status "Ip" and on the maximum admissible continuous current "Is" according to the equation:

t	=	Time to relay tripping
Kt	=	Load thermal time constant
I	=	Actual load current
In	=	Load rated current
Is	=	Continuous admissible current
Ip	=	Steady state current before the overload
ln	=	Natural Logarithm

$$t = Kt \cdot \ell_n \frac{\left(\frac{I}{In}\right)^2 - \left(\frac{Ip}{In}\right)^2}{\left(\frac{I}{In}\right)^2 - \left(\frac{Is}{In}\right)^2}$$

When the heating exceeds the set alarm level "Tal" or the max. allowed level ("I" > "Is" for the time "t") the output relays programmed for these function will be operated. Reset will take place when the heating will drop below 95% of the trip level.

17.5.2.2 – Thermal Image Curves (TU1024 Rev.1)

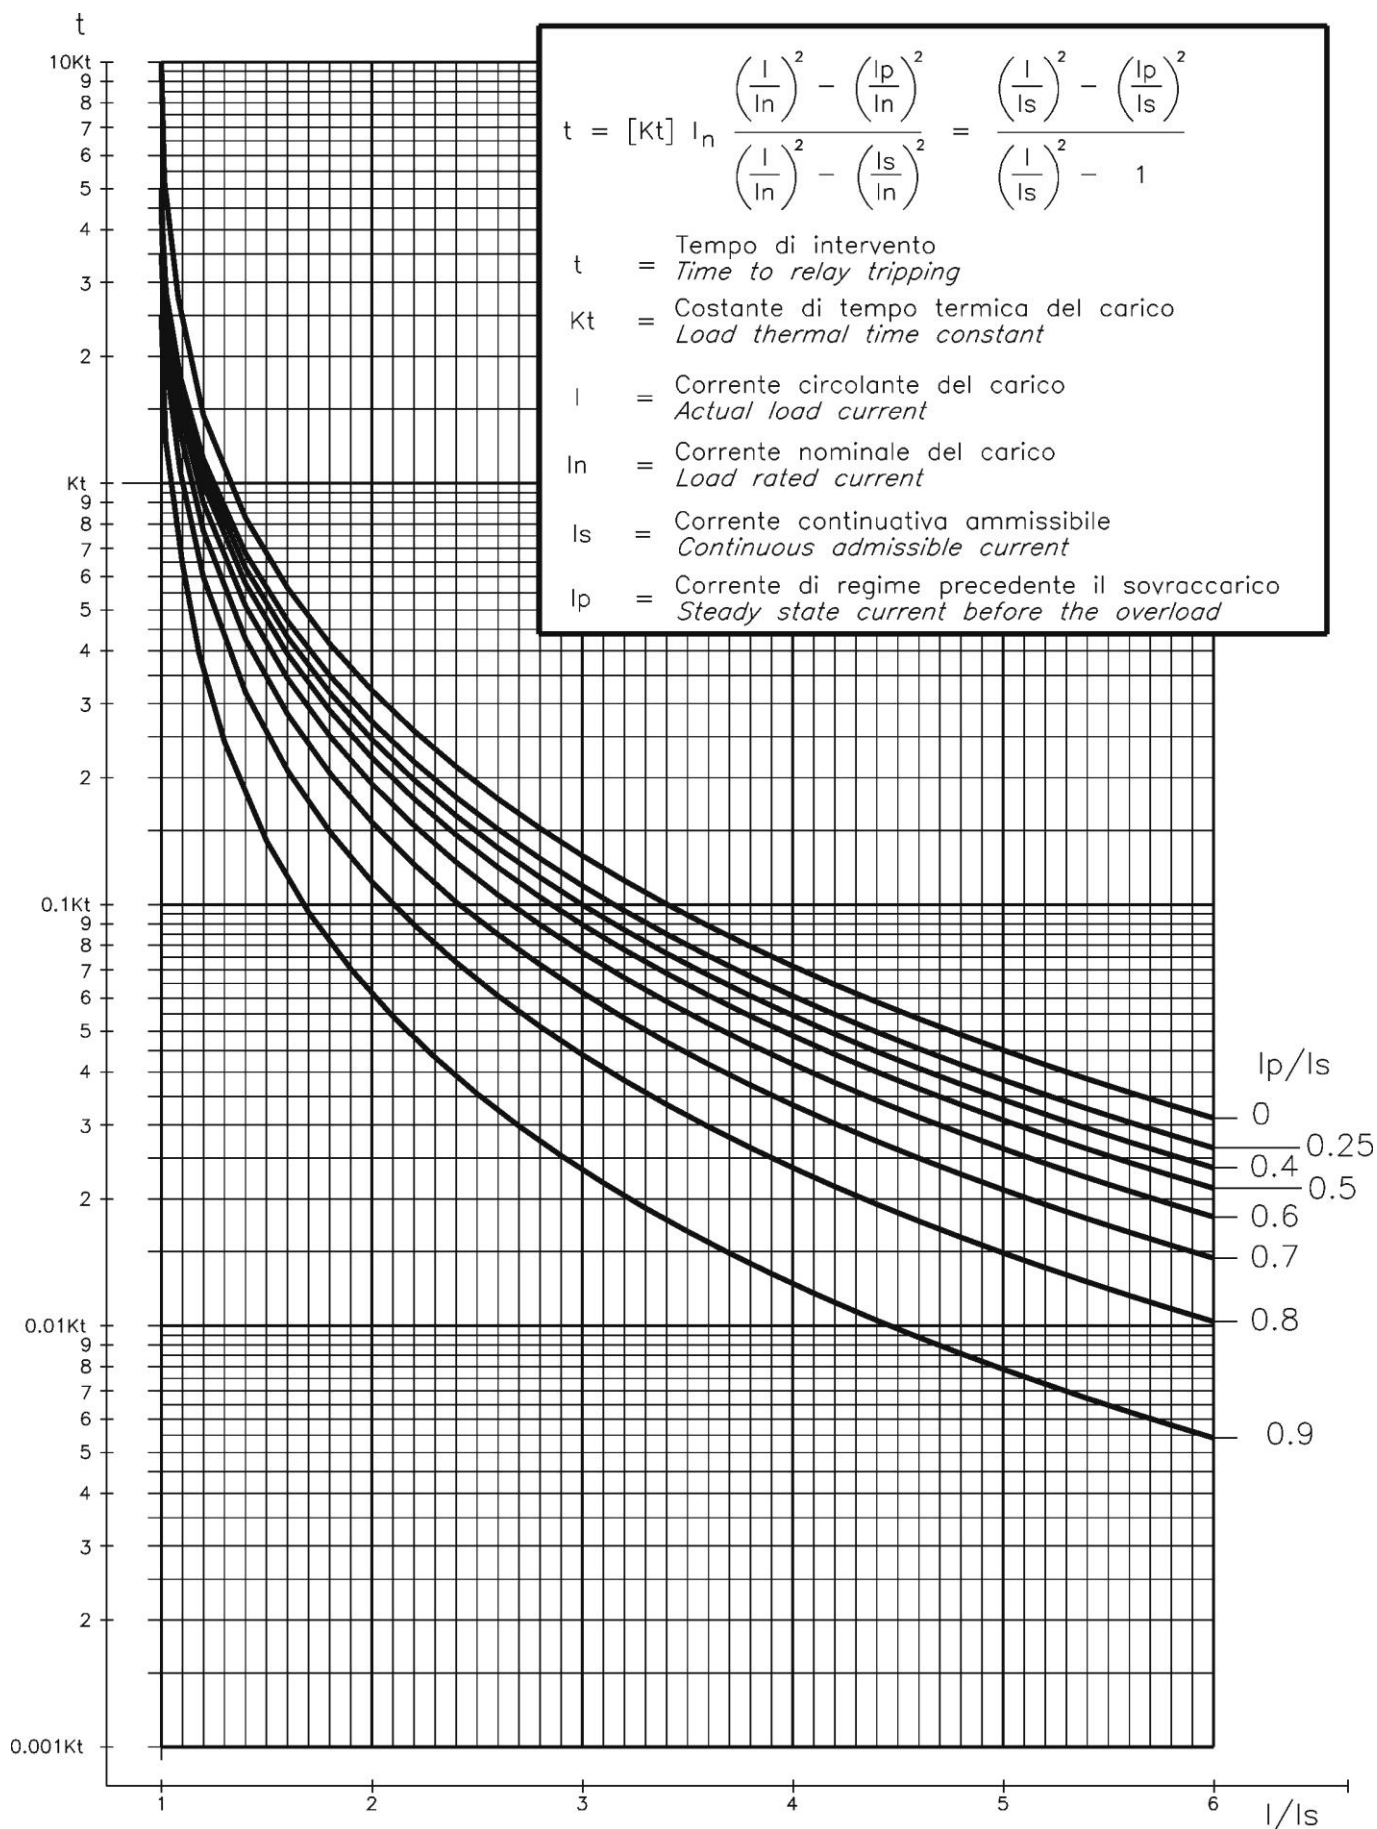

17.6 - Function: **1I>** (First Overcurrent Element F50/51)

Status	→	Enab.	 	[  Disable /   Enable]
Options	→	f(t)	Type - D	[D / A / B / C]
	→	tBI	Disable	[Disable / 2tBO]
	→	f(a)	Fw	[Disable / Fw / Rev]
	→	RCL	No	[No / Yes]
Levels	→	Is	4	In (0.100÷4) step 0.01 In
Timers	→	ts	100	s (0.01÷100) step 0.01 s
	→	tBO	0.75	s (0.05÷0.75) step 0.01 s

17.6.1 - Description of variables

☐	Enab.	:	Function enabling (Disable / Enable)
☐	f(t)	:	Operation characteristic (Time/Current curve): (D) = Independent definite time (A) = IEC Inverse Curve type A (B) = IEC Very Inverse Curve type B (C) = IEC Extremely Inverse Curve type C
☐	tBI	:	Blocking input reset time: Disable = Permanent block 2tBO = Set 2xtBO.
☐	f(a)	:	Operation mode: Disable = Non Directional Fw = Directional Forward Rev = Directional Reverse
☐	RCL	:	If "RCL = Yes", after tripping of the element "1I>" and Opening of the Circuit Breaker, the relay starts an automatic Line Test and a reclosure cycle. If "RCL = No" no test and no reclosure is started.
☐	Is	:	Minimum operation level
☐	ts	:	Trip time delay
☐	tBO	:	Time to reset of the Blocking Output after expiring of the Trip time delay. "tBO" is also the trip time delay of the Breaker Failure function.

17.6.2 - Algorithm of the time current curves

The Time Current Curves are generally calculated with the following equation

$$(1) \quad t(I) = \left[\frac{\frac{A}{\left(\frac{I}{I_s}\right)^a} + B}{\left(\frac{I}{I_s}\right)^a - 1} \right] \cdot K \cdot T_s + T_r \quad \text{where}$$

$t(I)$ = Actual trip time delay when the input current equals "I"
 I_s = Set minimum pick-up level

$$K = \left(\frac{A}{10^a - 1} + B \right)^{-1}$$

T_s = Set time delay: $t(I) = T_s$ when $\frac{I}{I_s} = 10$

t_r = Operation time of the output relay on pick-up.

The parameters A, B and a have different values for the different Time Current Curves.

Curve Name	Curve Identifier	A	B	a
IEC A Inverse	A	0.14	0	0.02
IEC B Very Inverse	B	13.5	0	1
IEC C Extremely Inverse	C	80	0	2

For the IEC curves, being $B = 0$, the Time/Current equation (1), becomes:

$$(1') \quad t(I) = \frac{(10^a - 1)T_s}{\left(\frac{I}{I_s}\right)^a - 1} + t_r = \frac{Kt}{\left(\frac{I}{I_s}\right)^a - 1} + t_r$$


Where $Kt = (10^a - 1)T_s$ is the time multiplier

When " $f(t) = D$ " is programmed, the trip time delay is Definite and independent from the current: excess " $t = t_s$ ".

The maximum measuring current is "40xIn" for phase elements and "10xOn" for the neutral elements.

Trip takes place when the current measured exceeds (no matter how much) the set level " I_s " for the set time " t_s ".

17.6.3 - IEC Curves

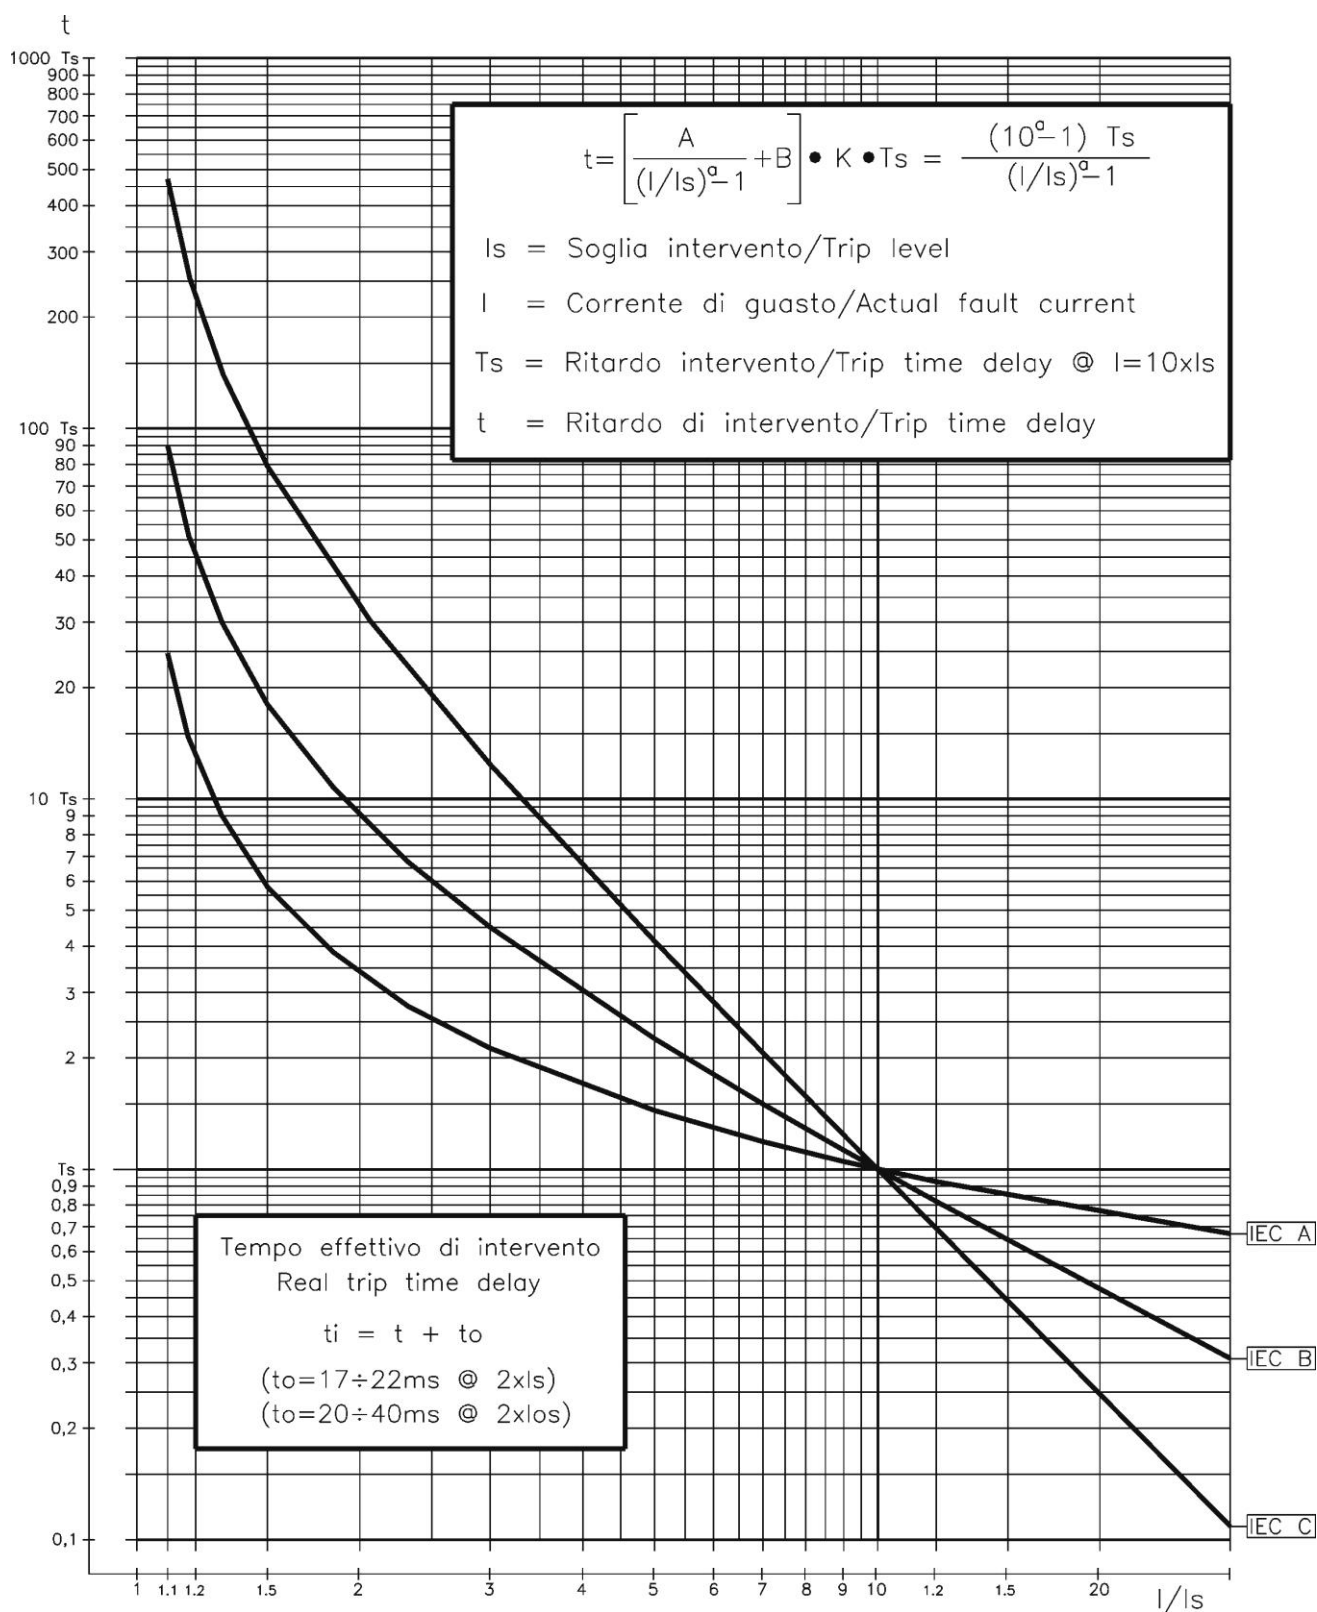

Curve Type	A	B	K	a
IEC A	0.14	0	0.336632	0.02
IEC B	13.5	0	0.666667	1
IEC C	80	0	1.2375	2

Max. "I" Phase = $40 \times I_n$
Max. "I" Neutral = $10 \times I_n$

17.6.4 – Blocking Logic (BO-BI)

For each Protection Function it is possible to activate a Blocking Logic allowing for inhibiting their operation by external signals supplied to the Digital Input.

17.6.4.1 – Output Blocking signal "BO"

All the protection functions that can be programmed to operate in the blocking logic mode, element, have an instantaneous element (beside the time delayed) which is operated as soon as the controlled quantity exceeds the set trip level ($I > [I_s]$ for current, etc..) and is instantaneously reset when the input quantity drops below the reset level (normally $0.95I_s$).

The instantaneous element can control one of the user programmable output relays that, by its contacts, makes the signal available for blocking an external element (BO = Blocking Output).

In case, "tBO" sec after the set trip time "ts" has expired, the Protection function is still in operation (current above trip level), the Blocking Output relay (instantaneous element) is anyhow reset to eventually remove the Blocking signal from a back-up protection.

17.6.4.2 – Blocking Input "BI"

For all the functions controllable by the Blocking Logic, it is possible to inhibit the time delayed tripping by an external signal that activates a Digital Input programmed for this functionality.

The programmed Digital Input gets activated by an external cold contact closing across its terminals.

With the variable "tBI" set to "OFF" (tBI=OFF), the tripping of the delayed function is blocked as long as the Blocking Input signal is present at the terminals of the Digital Input.

With the variable "tBI" set to "2xtBI" (tBI=2xtBI), 2xtBI seconds after the set trip time delay of the function has expired the blocking input is anyhow ignored and the function enabled to trip.

17.6.5 - Automatic doubling of Overcurrent thresholds on current inrush

For some of the phase Overcurrent functions it is possible to have the set trip level $[I_s]$ automatically doubled when strong inrush current is detected.

If at circuit Breaker switch-on (i.e. when the input current rises from zero to a minimum measurable value) the current increases from 0 to 1.5 times the rated value $[I_n]$ in less than 60ms, the set minimum pick-up level $[I_s]$ is dynamically doubled ($[I_s] \rightarrow [2I_s]$) and keeps this value until the input current drops below $1.25 \times I_n$ or the set time $[t_{2xI}]$ has elapsed.

This functionality is very useful to avoid spurious tripping of the instantaneous, or short-time delayed Overcurrent elements, that could be experienced at switch-on when energizing the feeder.

17.7 – Function: **2I>** (Second Overcurrent Element F50/51)

Status	→	Disable		[ Disable /  Enable]
Options	→	f(t)	Type - D	[D / A / B / C]
	→	tBI	Disable	[Disable / 2tBO]
	→	f(a)	Disable	[Disable / Fw / Rev]
	→	RCL	No	[No / Yes]
Levels	→	Is	1	In (0.100÷4) step 0.01 In
Timers	→	ts	100	s (0.01÷100) step 0.01 s
	→	tBO	0.75	s (0.05÷0.75) step 0.01 s

17.7.1 - Description of variables

☐	Disable	: Function enabling (Disable / Enable)
☐	f(t)	: Operation characteristic (Time/Current curve): (D) = Independent definite time (A) = IEC Inverse Curve type A (B) = IEC Very Inverse Curve type B (C) = IEC Extremely Inverse Curve type C
☐	tBI	: Blocking input reset time Disable = Permanent block 2tBO = Set 2xtBO.
☐	f(a)	: Operation mode: Disable = Non Directional Fw = Directional Forward Rev = Directional Reverse
☐	RCL	: If "RCL = Yes", after tripping of the element "2I>" and Opening of the Circuit Breaker, the relay starts an automatic Line Test and a reclosure cycle. If "RCL = No" no test and no reclosure is started.
☐	Is	: Minimum operation level
☐	ts	: Trip time delay
☐	tBO	: Time to reset of the Blocking Output after expiring of the Trip time delay. "tBO" is also the trip time delay of the Breaker Failure function.

17.8 - Function: **3I>** (Third Overcurrent Element F50/51)

Status	→	Disable		[ Disable /  Enable]
Options	→	tBI	Disable	[Disable / 2tBO]
	→	f(a)	Disable	[Disable / Fw / Rev]
	→	CoF	Disable	[Disable / Enable]
	→	RCL	No	[No / Yes]
Levels	→	Is	1	In (0.100÷10) step 0.01 In
Timers	→	ts	100	s (0.01÷100) step 0.01 s
	→	tCoF	0.05	s (0.02÷0.20) step 0.01 s
	→	tBO	0.75	s (0.05÷0.75) step 0.01 s

17.8.1 - Description of variables

☐	Disable	: Function enabling (Disable / Enable)
☐	tBI	: Blocking input reset time <i>Disable</i> = Permanent block <i>2tBO</i> = Set 2xtBO.
☐	f(a)	: Operation mode: <i>Disable</i> = Non Directional <i>Fw</i> = Directional Forward <i>Rev</i> = Directional Reverse
☐	CoF	: If "CoF = Enable", any time the circuit breakers status changes from open to close the "3I>" element is enabled to trip instantaneously if the current exceeds the set value "Is" within the time "tCoF". (Close On Fault Function)
☐	RCL	: If "RCL = Yes", after tripping of the element "3I>" and Opening of the Circuit Breaker, the relay starts an automatic Line Test and a reclosure cycle. If "RCL = No" no test and no reclosure is started.
☐	Is	: Minimum operation level.
☐	ts	: Trip time delay
☐	tCoF	: Maximum duration of the Close on Fault function.
☐	tBO	: Time to reset of the Blocking Output after expiring of the Trip time delay. "tBO" is also the trip time delay of the Breaker Failure function.

17.9 - Function: **4I>** (Fourth Overcurrent Element F50/51)

Status	→	Disable		[ Disable /  Enable]
Options	→	tBI	Disable	[Disable / 2tBO]
	→	f(a)	Disable	[Disable / Fw / Rev]
	→	CoF	Disable	[Disable / Enable]
	→	RCL	No	[No / Yes]
Levels	→	Is	10	In (0.100÷10) step 0.01 In
Timers	→	ts	100	s (0.01÷100) step 0.01 s
	→	tCoF	0.05	s (0.02÷0.20) step 0.01 s
	→	tBO	0.75	s (0.02÷0.20) step 0.01 s

17.9.1 - Description of variables

☐	Disable	: Function enabling (Disable / Enable)
☐	tBI	: Blocking input reset time <i>Disable</i> = Permanent block <i>2tBO</i> = Set 2xtBO.
☐	f(a)	: Operation mode: <i>Disable</i> = Non Directional <i>Fw</i> = Directional Forward <i>Rev</i> = Directional Reverse
☐	CoF	: If "CoF = Enable", any time the circuit breakers status changes from open to close the "3I>" element is enabled to trip instantaneously if the current exceeds the set value "Is" within the time "tCoF". (Close On Fault Function)
☐	RCL	: If "RCL = Yes", after tripping of the element "4I>" and Opening of the Circuit Breaker, the relay starts an automatic Line Test and a reclosure cycle. If "RCL = No" no test and no reclosure is started.
☐	Is	: Minimum operation level.
☐	ts	: Trip time delay
☐	tCoF	: Maximum duration of the Close on Fault function.
☐	tBO	: Time to reset of the Blocking Output after expiring of the Trip time delay. "tBO" is also the trip time delay of the Breaker Failure function.

17.10 - Function: **1delta-I** (First Current Step Element)

Status	→	Disable	  	[   Disable /    Enable]				
Options	→	RCL	No	[No / Yes]				
Levels	→	DI	1000	A	(100÷9990)	step	10	A
	→	di	200	A/ms	(4÷400)	step	1	A/ms
Timers	→	tDI	100	ms	(0÷500)	step	1	ms
	→	tdi	20	ms	(0÷100)	step	1	ms

17.10.1 - Description of variables


- ☐ **Disable** : Function enabling (Disable / Enable)
- ☐ **RCL** : If "RCL = Yes", after tripping of the element "1dI" and Opening of the Circuit Breaker, the relay starts an automatic Line Test and a reclosure cycle. If "RCL = No" no test and no reclosure is started.
- ☐ **DI** : Current step trip level
- ☐ **di** : Minimum di/dt level to start "ΔI" evaluation and detection reset level
- ☐ **tDI** : Trip time delay
- ☐ **tdi** : Detection reset time delay

17.10.2 - Operation of the Current step monitoring element

The timely detection of a current step allow to clear a near short circuit long before the current can reach the prospective peak value.

Protection Function Operation
(see Fig. 1):

- Any time a current rate of rise exceeding the set value $[di]$ is detected the value of the current " i_{1b} " is recorded as reference basic value to evaluate the current step " $\Delta I = i - i_{1b}$ " and the timer " tDI " is started. " ΔI " is evaluated every 1ms.
- If during $[tDI]$ the rate of rise " di/dt " never goes below the set level $[di]$ for a time longer than $[tdi]$, when $[tDI]$ expires, the difference $\Delta I = i - i_{1b}$ is measured and if " $\Delta I \geq [DI]$ " the protection function trips.
- If during $[tDI]$ the rate of rise " di/dt " goes below the set level $[di]$ for a time longer than $[tdi]$, a new value of the current i_{2b} is recorded and, when $[tDI]$ expires. If the difference $\Delta I = i - i_{2b}$ measured is greater than $[DI]$, the protection function trips.

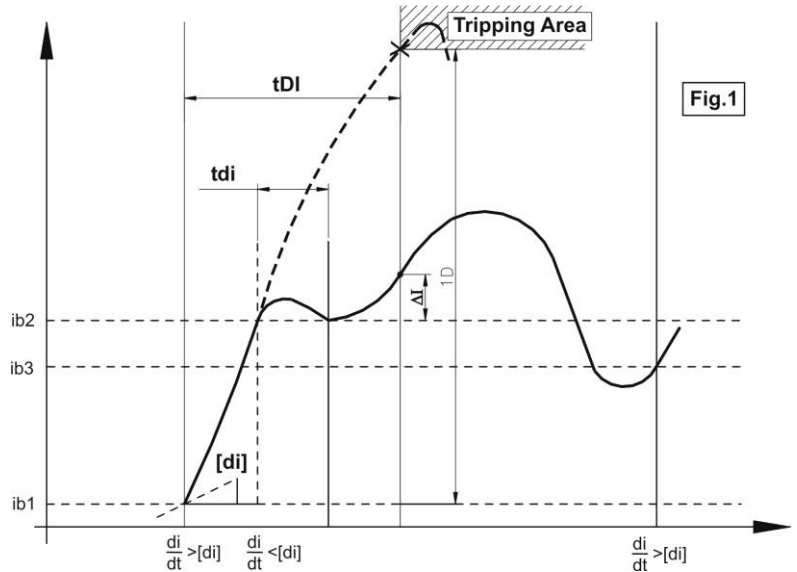

In terms of equation the protection function operation is as follow:

$$\text{If } \frac{di}{dt} \geq [di] \Rightarrow \left\{ \begin{array}{l} \text{Value of Current } i_{1b} \text{ is recorded} \\ \text{Timer } tDI \text{ is Started} \end{array} \right\} \Rightarrow \text{If During } tDI \Rightarrow$$

$$\Rightarrow \left\{ \begin{array}{l} \frac{di}{dt} \geq [di] \text{ during } tdi \Rightarrow \text{Trip if } \Delta = i - i_{1b} \geq [DI] \text{ after } tDI \\ \frac{di}{dt} < [di] \text{ during } tdi \Rightarrow \text{New Value of Current } i_{2b} \text{ is recorded} \Rightarrow \text{Trip if } \Delta = i - i_{2b} \geq [DI] \text{ after } tDI \end{array} \right.$$

If, at the end of $[tDI]$ no trip occurs " ΔI " evaluation is stopped and will restart when the set " di/dt " level is exceeded.

17.11 - Function: **2delta-I** (Second Current Step Element)

Status	→ Disable		[ Disable /  Enable]				
Options	→ RCL	No	[No / Yes]				
Levels	→ DI	1000	A	(100÷9990)	step	10	A
	→ di	200	A/ms	(4÷400)	step	1	A/ms
Timers	→ tDI	100	ms	(0÷500)	step	1	ms
	→ tdi	20	ms	(0÷100)	step	1	ms

17.11.1 - Description of variables

- ☐ **Disable** : Function enabling (Disable / Enable)
- ☐ **RCL** : If "RCL = Yes", after tripping of the element "2dI" and Opening of the Circuit Breaker, the relay starts an automatic Line Test and a reclosure cycle. If "RCL = No" no test and no reclosure is started.
- ☐ **DI** : Current step trip level
- ☐ **di** : Minimum di/dt level to start "ΔI" evaluation and detection reset level
- ☐ **tDI** : Trip time delay
- ☐ **tdi** : Detection reset time delay

17.12 - Function: **1di/dt** (First Current Rate of Rise Element)

Status	→ Disable	 	[  Disable /   Enable]				
Options	→ RCL	No	[No / Yes]				
Levels	→ G	20	A/ms	(4÷400)	step	1	A/ms
Timers	→ tG	20	ms	(2÷500)	step	1	ms

17.12.1 - Description parameters

☐	Disable	: Function enabling (Disable / Enable)
☐	RCL	: If "RCL = Yes", after tripping of the element "1di/dt" and Opening of the Circuit Breaker, the relay starts an automatic Line Test and a reclosure cycle. If "RCL = No" no test and no reclosure is started.
☐	G	: di/dt trip level
☐	tG	: Trip time delay

17.12.2 - Operation of the current rate of rise monitoring element

This function is used to detect remote faults

Current is sampled at 1kHz, is measured as the average of 3 samples and stored in a buffer from which every 1ms the relay computes the average rate of rise in the set time delay:

$$\frac{di}{dt} = \frac{I_{(t+[tG])} - I_{(t)}}{tG}$$

if $\frac{di}{dt} \geq [G]$ the relay trip

17.13 - Function: **2di/dt** (Second Current Rate of Rise Element)

Status	→ Disable	  	[   Disable /    Enable]			
Options	→ RCL	No	[No / Yes]			
Levels	→ G	20	A/ms	(4÷400)	step 1	A/ms
Timers	→ tG	20	ms	(2÷500)	step 1	ms

17.13.1 - Description parameters

☐	Disable	: Function enabling (No = Disable / Yes = Enable)
☐	RCL	: If "RCL = Yes", after tripping of the element "1di/dt" and Opening of the Circuit Breaker, the relay starts an automatic Line Test and a reclosure cycle. If "RCL = No" no test and no reclosure is started.
☐	G	: di/dt trip level
☐	tG	: Trip time delay

17.13.2 - Operation of the current rate of rise monitoring element

This function is used to detect remote faults

Current is sampled at 1kHz, is measured as the average of 3 samples and stored in a buffer from which every 1ms the relay computes the average rate of rise in the set time delay:

$$\frac{di}{dt} = \frac{I_{(t+[tG])} - I_{(t)}}{tG}$$

if $\frac{di}{dt} \geq [G]$ the relay trip

17.14 - Function: **Rapp** (Impedance monitoring - di/dt dependence)

Status	→ Disable	 	[  Disable /   Enable]				
Options	→ RCL	No	[No / Yes]				
Levels	→ Va	400	V	(0÷800)	step	1	V
	→ Ri	0.100	Ω	(0÷0.250)	step	0.001	Ω
	→ Rt	1	Ω	(0.001÷2.500)	step	0.001	Ω
	→ Li	0.005	H	(0.001÷0.010)	step	0.001	H
	→ Lt	0.010	H	(0.002÷0.050)	step	0.001	H
	→ R*	50	Ω	(0÷100)	step	0.01	Ω
	→ g	50	A/ms	(10÷500)	step	1	A/ms
Timers	→ tr	50	ms	(0÷100)	step	1	ms

17.14.1 - Description of variables


☐	Disable	: Function enabling (Disable / Enable)
☐	RCL	: I If "RCL = Yes", after tripping of the element "Rapp" and Opening of the Circuit Breaker, the relay starts an automatic Line Test and a reclosure cycle. If "RCL = No" no test and no reclosure is started.
☐	Va	: Arc voltage.
☐	Ri	: Internal Resistance = Resistance of the circuit upstream the Circuit Breaker.
☐	Rt	: Total resistance of the circuit including the Contact Line.
☐	Li	: Internal Inductance = Inductance of the circuit upstream the Circuit Breaker.
☐	Lt	: Total Inductance of the circuit including the Contact Line.
☐	R*	: Resistance trip level if di/dt ≥ g.
☐	g	: Limit value of di/dt.
☐	tr	: Trip time delay.

17.14.2 - Operation the Impedance monitoring element

The protection element shall trip if the impedance "Rapp" calculated as the ratio of the line voltage to the line current drops below the calculated value with the current rate of rise exceeding the level as reported on the trip characteristics. Trip takes place if the situation lasts longer than the set time delay "tr".

$$Rapp = \left[V - \frac{Ri(V - Va)}{Rt} + \left(\frac{Lt}{Rt} \cdot Ri - Li \right) g \right] : \left(\frac{V - Va}{Rt} - \frac{Lt}{Rt} \cdot g \right)$$

Reset takes place when "Rapp" is 10% higher than the trip value.

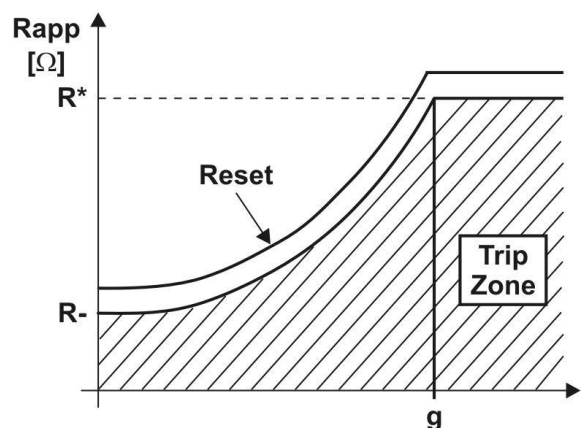

17.15 - Function: **Iapp** (Current monitoring with di/dt dependence)

Status	→ Disable			[ Disable /  Enable]
Options	→ RCL	No		[No / Yes]
Levels	→ IA	1500	A	(500÷5000) step 10 A
	→ I*	500	A	(400÷1500) step 10 A
	→ g	50	A/ms	(30÷500) step 1 A/ms
	→ Res	90	%	(80÷100) step 1 %Iapp
Timers	→ tr	0.10	s	(0÷5.00) step 0.01 s

17.15.1 - Description of variables

- ☐ **Disable** : Function enabling (Disable / Enable)
- ☐ **RCL** : If "RCL = Yes", after tripping of the element "Iapp" and Opening of the Circuit Breaker, the relay starts an automatic Line Test and a reclosure cycle.
If "RCL = No" no test and no reclosure is started.
- ☐ **IA** : Current trip level when di/dt = 0
- ☐ **I*** : Current trip level when di/dt ≥ [g]
- ☐ **g** : Limit value of di/dt
- ☐ **Res** : Drop-out percentage (operation reset)
- ☐ **tr** : Trip time delay.


17.15.2 - Operation of the "Iapp" element

The protection shall trip if current measured exceeds the value [Iapp] calculated as hereunder showed for longer than the set time "tr" reset takes place as soon as the current

drops below $[Iapp] \cdot \frac{Res}{100}$

$$Iapp = \left[\frac{IA - I^*}{g} \right] \cdot \frac{di}{dt} - [IA] \text{ if } 0 \leq \frac{di}{dt} \leq g$$

$$Iapp = I^* \text{ if } \frac{di}{dt} > g$$

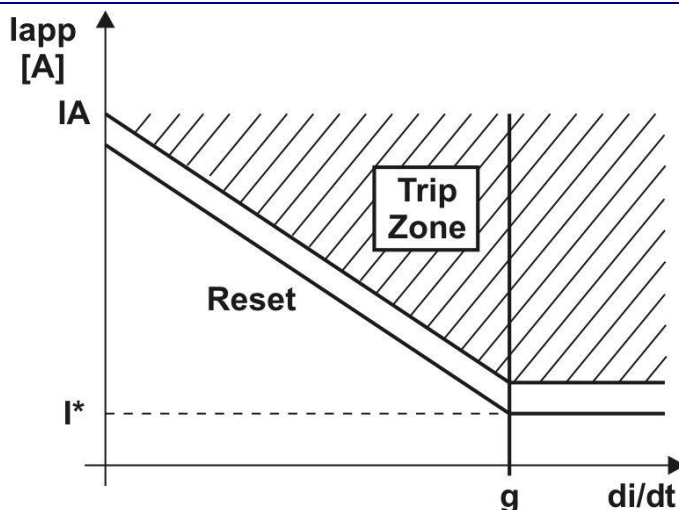

17.16 - Function: **1Ig** (First Frame Fault Element)

Status	→ Disable		[ Disable /  Enable]
Options	→ f(t)	Type - D	[D / A / B / C]
	→ RCL	No	[No / Yes]
Levels	→ Is	1.00	Ign (0.00÷2.00) step 0.01 Ign
	→ Us	0.20	Ugn (0.00÷1.00) step 0.01 Ugn
Timers	→ ts	20	s (0.02÷100.00) step 0.01 s

17.16.1 - Description of variables

☐	Disable	: Function enabling (Disable / Enable)
☐	f(t)	: Operation characteristic (Time/Current curve): (D) = Independent definite time (A) = IEC Inverse Curve type A (B) = IEC Very Inverse Curve type B (C) = IEC Extremely Inverse Curve type C
☐	RCL	: If "RCL = Yes", after tripping of the element "1Ig" and Opening of the Circuit Breaker, the relay starts an automatic Line Test and a reclosure cycle. If "RCL = No" no test and no reclosure is started.
☐	Is	: Minimum operation level of frame to earth current.
☐	Us	: Minimum operation level of frame to earth voltage.
☐	ts	: Trip time delay

17.16.2 - Operation

Trip takes places if, for larger than the set time delay [ts], both the ground fault current "Ig" and the Voltage to ground "Ug" exceed the set values [Is] and [Us].

If "Is = 0" the relay shall consider "Ug" only, viceversa if "Ug = 0" the relay shall consider "Ig" only.

Setting		Tripping condition
Is	Us	
≠0	≠0	Ig>[Is] & Ug>[Us]
≠0	=0	Ig>[Is]
=0	≠0	Ug>[Us]

17.17 - Function: **2Ig** (Second Frame Fault Element)

Status	→ Disable	  	[   Disable /    Enable]			
Options	→ f(t)	Type - D	[D / A / B / C]			
	→ RCL	No	[No / Yes]			
Levels	→ Is	1.00	Ign	(0.00÷2.00)	step	0.01 Ign
	→ Us	0.20	Ugn	(0.00÷1.00)	step	0.01 Ugn
Timers	→ ts	20	s	(0.02÷100.00)	step	0.01 s

17.17.1 - Description of variables

☐	Disable	: Function enabling (No = Disable / Yes = Enable)
☐	f(t)	: Operation characteristic (Time/Current curve): (D) = Independent definite time (A) = IEC Inverse Curve type A (B) = IEC Very Inverse Curve type B (C) = IEC Extremely Inverse Curve type C
☐	RCL	: If "RCL = Yes", after tripping of the element "2Ig" and Opening of the Circuit Breaker, the relay starts an automatic Line Test and a reclosure cycle. If "RCL = No" no test and no reclosure is started.
☐	Is	: Minimum operation level
☐	Us	: Minimum operation level
☐	ts	: Trip time delay

17.17.2 - Operation

Trip take place if, for larger than the set time delay [ts], both the ground fault current "Ig" and the Voltage to ground "Ug" exceed the set values [Is] and [Us].

If "Is = 0" the relay shall consider "Ug" only viceversa if "Ug = 0" the relay shall consider "Ig" only.

Setting		Tripping condition
Is	Us	
≠0	≠0	Ig>[Is] & Ug>[Us]
≠0	=0	Ig>[-Is]
=0	≠0	Ug>[Us]

17.18 - Function: **RCL** (Automatic Reclosure)

Status	→	Disable		[ Disable /  Enable]
Options	→	ShNum	2	[1 / 2 / 3 / 4]
	→	Test	Yes	[No / Yes]
Timers	→	tr	10	s (1÷200) step 1 s
	→	t1	0.3	s (0.1÷1000) step 0.1 s
	→	t2	1	s (0.1÷1000) step 0.1 s
	→	t3	3	s (0.1÷1000) step 0.1 s
	→	t4	10	s (0.1÷1000) step 0.1 s


17.18.1 - Description of variables

☐	Disable	: Function enabling (Disable / Enable)
☐	ShNum	: Number of reclosure shots to Lock-out
☐	Test	: "Yes" - Before any reclosure the Line Test is started and the reclosure is operated only after a successful Line Test is carried-out. "No" - Reclosure is operated without Line-Test.
☐	tr	: Reclaim time. Any new trip during "tr" after a successful reclosure shot starts the next shot of the cycle. Any new trip after "tr" restarts a complete cycle.

17.18.2 - Operation

- ☐ The status of the Circuit Breaker (C/B) is indicated by one normally open contact of the C/B itself and is detected by a digital input of the relay.
- ☐ A reclose shot is started after a C/B's opening operated by one of the relay's protection functions programmed to control this reclose shot; C/B's opening operated by one element not programmed to control the reclosure shot activates the Lock-out status of the Reclosure function.
- ☐ Any time the Circuit Breaker (C/B) is closed either manually or automatically the Reclaim time "tr" is started.
- ☐ After a manual closure of the C/B, operation time start or tripping of any of the relay protection elements during "tr", makes the relay enter into the Lock-Out status (L.O.). In the L.O. status the relay, after breaker opening, does not produce any command for automatic reclose ; the lock-out status is shows on the display.
Reset from the L.O. status takes place when the C/B is opened and then manually reclosed or by operating the external reset command.
- ☐ If none of the relay protection elements is started during "tr" after a manual closure of the C/B, the relay is ready to start the Automatic Reclose Sequence.
- ☐ If "tr" is started by an automatic reclosure, the operation time start during "tr" and the tripping of any element programmed for the operation of the next reclosure makes the relay proceed with the reclosing cycle.
- ☐ After "tr" is expired the reclosing cycle restarts from the first reclosure (1C).
- ☐ Pick-up of the time start of any protection element, stops the counting down of "tr"; counting is restarted as soon as the element resets.
- ☐ As soon as the C/B is opened due to tripping of one of the relay's elements programmed to initiate the next automatic reclose shot, the relevant reclose time delay (t1, t2, t3, t4) is started and at the end of this tx time the reclose command is issued by the relay. The C/B is then automatically reclosed and the reclaim time "tr" is started again. If during "tr" the C/B is again opened by a relay's element programmed to initiate the next automatic reclose, the next reclose takes place after the relevant time tx; the C/B is reclosed and "tr" restarted. When the last Automatic Reclose shot of the sequence has been done, any further tripping during "tr" produces a relay's lock-out status. If after any reclose shot no tripping takes place during "tr", the Reclose Sequence is restarted from the beginning (starting from the first reclose shot 1C)


17.18.3 – Status indication

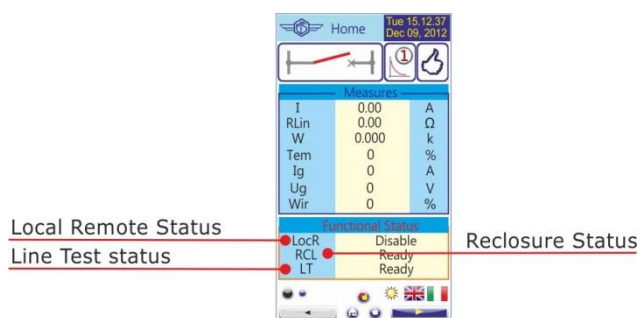

Display of Reclosure status

- **Ready** Ready to operate
- **Active** Reclosure in progress
- **Fail** Failed Reclosure
- **Wait** Standby
- **ExtFail** Reclosure lock-out due to an External Failure (see flow chart RCL)
- **ManOpen** Manual Opening
- **ExtLock** External reclosure lock-out by digital input

17.18.4 - Flow chart RCL

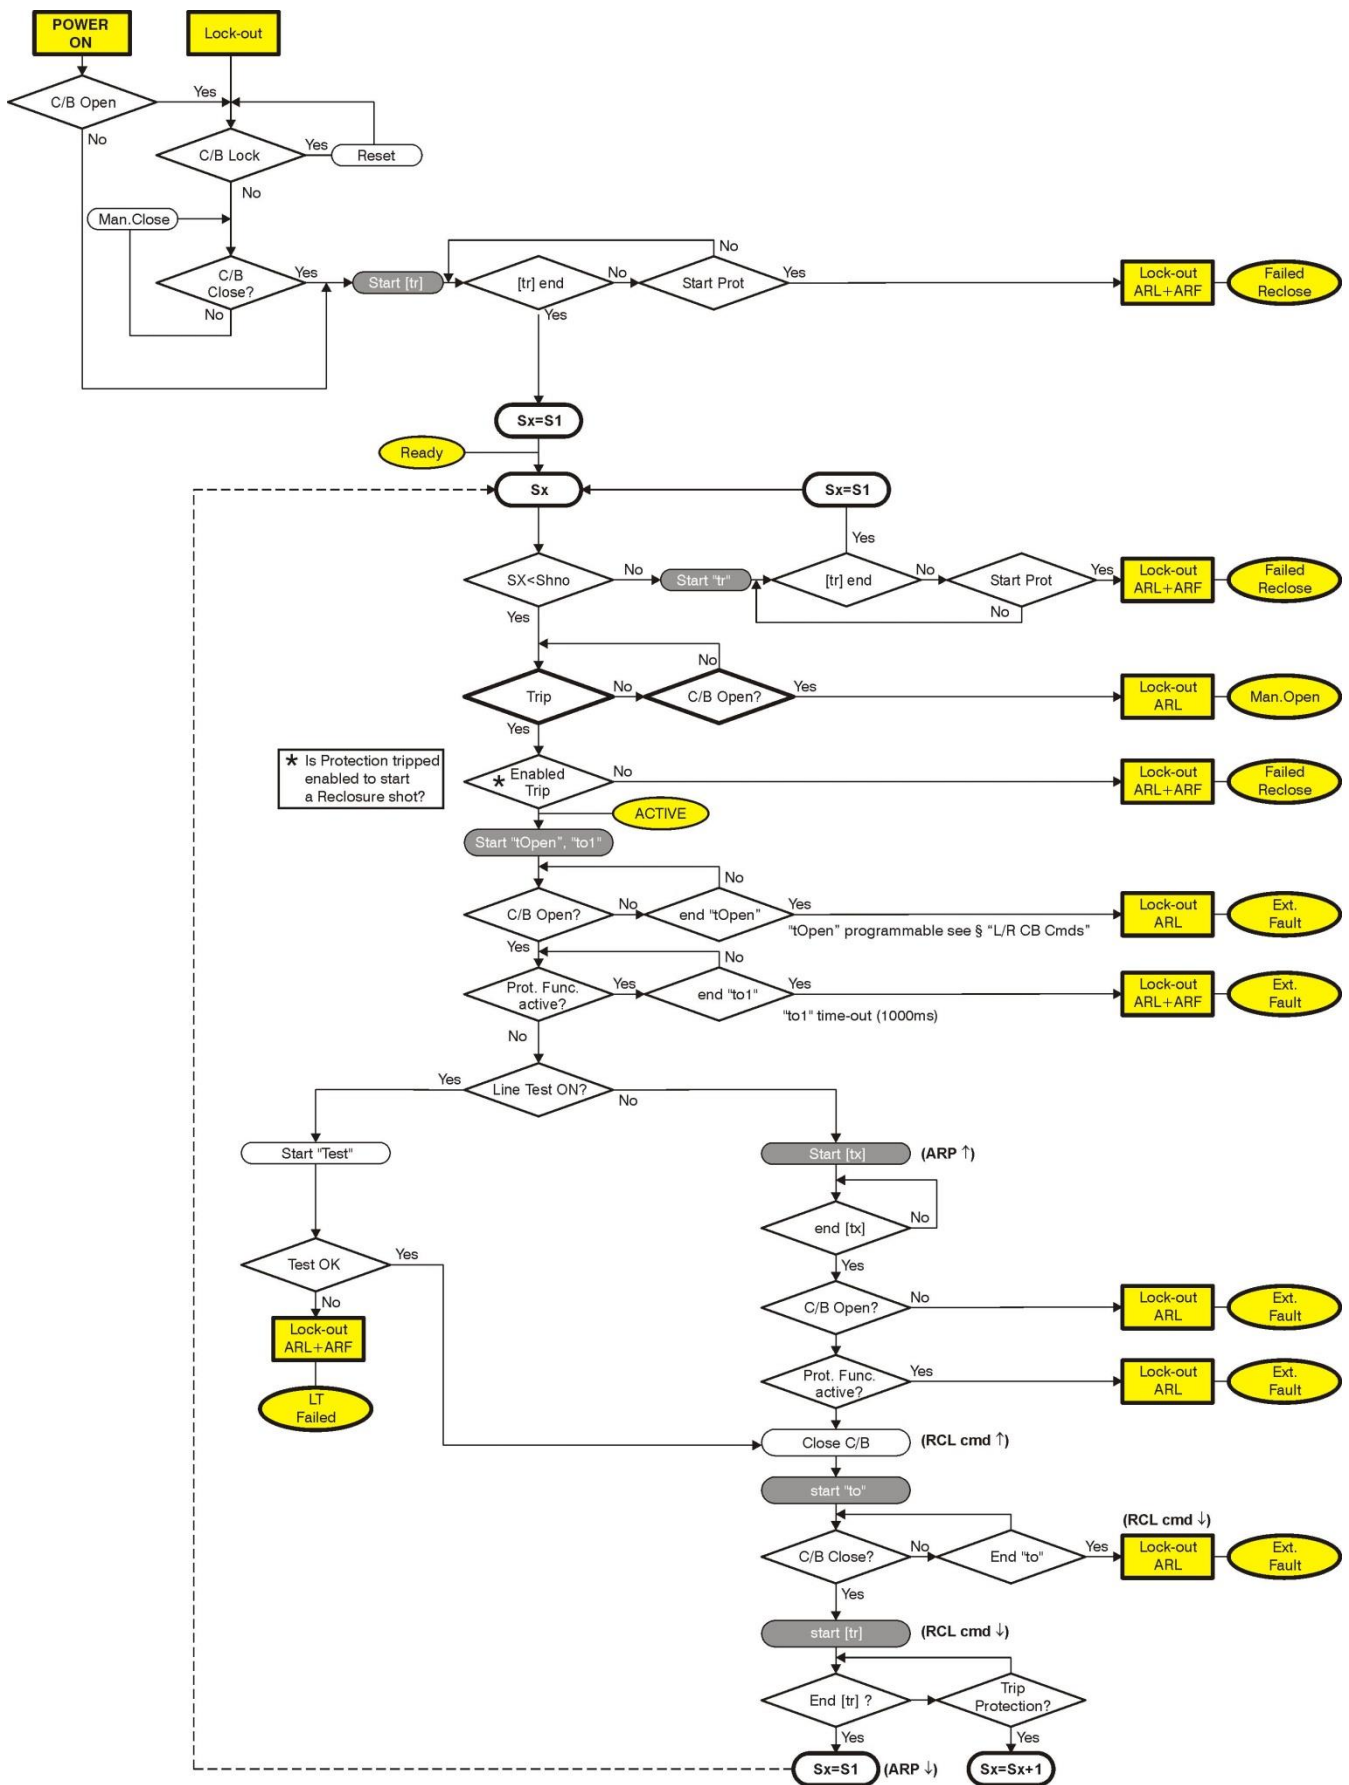

17.19 - Function: **1U>** (First OverVoltage Element F59)

Status	→	Disable		[		Disable /		Enable]
Levels	→	Us	1.10	Un	(0.5÷1.50)	step	0.01	Un
Timers	→	ts	10	s	(0÷650)	step	1	s

17.19.1 - Description of variables

- ☐ **Disable** : Function enabling (Disable / Enable)
- ☐ **Us** : Minimum operation level
- ☐ **ts** : Trip time delay

17.20 - Function: **2U>** (Second OverVoltage Element F59)

Status	→	Disable		[		Disable /		Enable]
Levels	→	Us	1.10	Un	(0.5÷1.50)	step	0.01	Un
Timers	→	ts	10	s	(0÷650)	step	1	s

17.20.1 - Description of variables

- ☐ **Disable** : Function enabling (Disable / Enable)
- ☐ **Us** : Minimum operation level
- ☐ **ts** : Trip time delay

17.21 - Function: **1U<** (First UnderVoltage Element F27)

Status	→ Disable			[ Disable /  Enable]
Levels	→ Us	0.70	Un	(0.2÷1.00) step 0.01 Un
Timers	→ ts	10	s	(0÷650) step 1 s

17.21.1 - Description of variables

- ☐ **Disable** : Function enabling (Disable / Enable)
- ☐ **Us** : Minimum operation level
- ☐ **ts** : Trip time delay

17.22 - Function: **2U<** (Second UnderVoltage Element F27)

Status	→ Disable			[ Disable /  Enable]
Levels	→ Us	0.70	Un	(0.2÷1.00) step 0.01 Un
Timers	→ ts	10	s	(0÷650) step 1 s

17.22.1 - Description of variables

- ☐ **Disable** : Function enabling (Disable / Enable)
- ☐ **Us** : Minimum operation level
- ☐ **ts** : Trip time delay

17.23 - Function: **Wi** (Circuit Breaker maintenance level)

Status	→	Disable	✖ 0 ✔	✖ 0 ✔ Disable / ✔ 0 ✖ Enable				
Levels	→	Ii	1000	In	(0.1÷99)	step	0.1	In
		Wi	1.000		(1÷9999)	step	1	

17.23.1 - Description of variables

☐ Disable	:	Function enabling (Disable / Enable)
☐ Ii	:	Circuit Breaker Rated Current in multiples of the Relay rated input current In
☐ Wi	:	Maximum allowed amount of accumulated interruption energy before maintenance as stated by the C/B Manufactured.

17.23.2 - Operation (Accumulation of the interruption Energy)

The relay computes the Arc Energy developed during each interruption of the Circuit Breaker and accumulates these values.

When the amount of the accumulated energy exceeds a settable level the relay gives out an alarm to signalize that maintenance inspection of the Circuit Breaker is needed.

The operation of this function is based on the following parameters:

$$\mathbf{Ii} = Ii = (0.1-99)In$$

$$\mathbf{Wi} = Wi = (1 - 9999)$$

"Wi" is set as a multiple of the conventional interruption energy unit.

Any time the Circuit Breaker opens (change of status from closed to open of the digital input connected to the normally open contact 52a of the C/B) the relay decreases the amount of energy corresponding to a number of conventional units:

$$nW_c = \frac{W}{W_c} = \frac{I^2 \cdot t_x}{I_i^2 \cdot t_i}$$

where:

$$\mathbf{W} = I^2 \cdot t_x \quad \text{Interruption Energy during the interruption time "tx" with interruption current "I".}$$

$$\mathbf{Wc} = I_i^2 \cdot t_i \quad \text{Conventional unit of interruption energy corresponding to C/B rated current and rated interruption time "ti".}$$

When the set Energy level before maintenance is decreased to zero a user programmable output relay is operated.

Reset to Zero of the Energy accumulation is available in the menu "**Command**" (Reset Term).

17.24 - Function: **TCS** (Trip Circuit Supervision)

Status	→ Disable			[ Disable /  Enable]
Timers	→ ts	0.10	s	(0.1÷100) step 0.01 s

17.24.1 - Description of variables

- ☐ **Disable** : Function enabling (Disable / Enable)
- ☐ **ts** : Trip time delay

17.24.2 - Operation

The relay includes a complete Circuit Breaker Trip Circuit Supervision unit that is associated to the Contact "15-26" of the "R1" Output Relay.

The contact of "R1" is used to trip the C/B as reported in the drawing here below.

The supervision works when the C/B is closed and recognizes the Trip Circuit as sound as far as the current flowing exceeds "1mA".


In case of Trip Circuit Fault detection, the diagnostic relay is operated and the Led starts flashing (see § Signalization).

To have Supervision also with the C/B open one N/C contact (52b) from the C/B and an external resistor "R" are needed.

$$R[k\Omega] \leq \frac{V}{1mA} - R_{52} \quad \text{where} \quad R_{52} = \text{Trip Coil internal resistance [k}\Omega\text{]}$$

V = Trip Circuit Voltage

$$P_R \geq 2 \cdot \frac{V^2}{R} [W] \quad \text{Designed power of external resistance "R"}$$

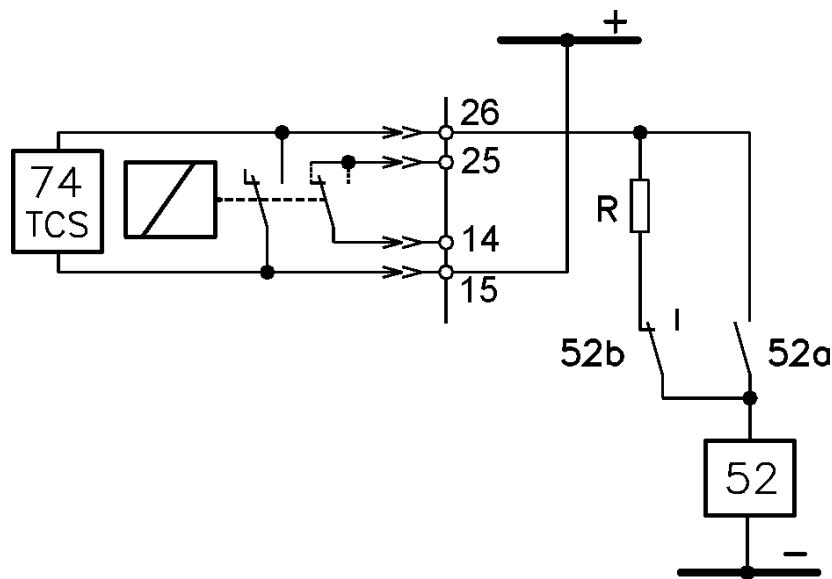

Tripping of the function operates a user programmable output relay.

17.25 - Function: **IRF** (Internal Relay Fault)

In this menu it is possible to configurate the operation of the Relay Internal Fault detection element

Status	→	Disable	  	[	  	Disable /	  	Enable]
Timers	→	tIRF	5.00	s	(5÷200)	step	0.01	s

17.25.1 - Description of variables

- ☐ **Disable** : Function enabling (No = Disable / Yes = Enable)
- ☐ **tIRF** : Trip time delay

17.25.2 - Operation

Tripping of the function operates a user programmable output relay.

17.26 - Function: **RT** (First Element Remote Trip)

In this menu it is possible to configure the Remote Trip Element.

Status	→	Disable		[ Disable /  Enable]
Options	→	RCL	No	[No / Yes]
	→	RTon	FallEdge	[RiseEdge – FallEdge]
Timers	→	ts	5.00 s	(0 ÷ 10.00) step 0.01 s

17.26.1 - Description of variables

- ☐ **Disable** : Function enabling (Disable / Enable)
- ☐ **RCL** : If "RCL = Yes", after tripping of the element "RT" and Opening of the Circuit Breaker, the relay starts an automatic Line Test and a reclosure cycle. If "RCL = No" no test and no reclosure is started.
- ☐ **RTon** : Remote trip Edge selector
- ☐ **ts** : Trip time delay

17.26.2 - Operation

Tripping of the function operates a user programmable output relay.

When Remote Trip is enabled to initiate a reclosure shot, the relevant input signal must be cleared within the time-out "to1" (1000ms); if the signal stays for longer than "to1" the reclosure function goes into the lock-out status giving an External Fail signal.

17.27 - Function: **RTX** (Second Element Remote Trip)

In this menu it is possible to configure the Remote Trip Element.

Status	→ Disable		[ Disable /  Enable]
Options	→ RCL	No	[No / Yes]
	→ RTon	FallEdge	[RiseEdge – FallEdge]
Timers	→ ts	5.00	s (0 ÷ 10.00) step 0.01 s

17.27.1 - Description of variables

- ☐ **Disable** : Function enabling (Disable / Enable)
- ☐ **RCL** : If "RCL = Yes", after tripping of the element "RTX" and Opening of the Circuit Breaker, the relay starts an automatic Line Test and a reclosure cycle. If "RCL = No" no test and no reclosure is started.
- ☐ **RTon** : Remote trip Edge selector
- ☐ **ts** : Trip time delay

17.27.2 - Operation

Tripping of the function operates a user programmable output relay.

When Remote Trip is enabled to initiate a reclosure shot, the relevant input signal must be cleared within the time-out "to1" (1000ms); if the signal stays for longer than "to1" the reclosure function goes into the lock-out status giving an External Fail signal.

17.28 - Function: **BrkFailure** (Breaker Failure)

Status	→	Disable		[		Disable /		Enable]
Timers	→	tBF	0.75	s	(0.05÷0.75)	step	0.01	s

17.28.1 - Description of variables

- ☐ **Disable** : Function enabling (Disable / Enable)
- ☐ **tBF** : Trip time delay

17.28.2 - Operation

The Breaker Failure detection is started by the operation of the output relay "R1" (programmed to be controlled by the Protection Functions that trip the C/B).
If after [tBF] seconds from operation of the relay "R1", any input current flow is still detected (>10% In), the function "BF" trips and operate one user programmable output relay,

17.29 - Function: **Wh** (Energy counter Pulse)

In this menu it is possible to configure the Energy counter Pulse.

Status	→	Disable		[ Disable /  Enable]
Levels	→	WpP	100	kW (10 ÷ 1000) step 10 kWh
Timers	→	Pulse	1.00	s (0.10 ÷ 2.00) step 0.01 s

17.29.1 - Description of variables

- ☐ **Disable** : Function enabling (Disable / Enable)
- ☐ **WpP** : Energy counter Pulse Level
- ☐ **Pulse** : Pulse duration

17.29.2 - Operation

One selected output relay issued a pulse from an external energy counter, each pulse corresponds to the programmed Energy unit "WpP" and its duration is the set time "Pulse".

17.30 - Function: **Self Trip**(Energy counter Pulse)

In this menu it is possible to configure the Self Trip function.

Status	→	Disable		[ Disable /  Enable]
Options	→	RCL	No	[No / Yes]
Timers	→	ts	1.00	s (0.10 ÷ 2.00) step 0.01 s

17.30.1 - Description of variables

- ☐ **Disable** : Function enabling (Disable / Enable)
- ☐ **RCL** : Reclosure
- ☐ **ts** : Self-Trip time delay

17.30.2 - Operation

This function is use to individuate the "CB self-trip" without make any complex logic with "user variables". The function check only the "Main HSCB", and if it pass from close status to open, without a command issued by the relay, the "self-trip" variable is set.

17.31 - Function: **Oscillo** (Oscillographic Recording)

Status	→ Disable		[ Disable /  Enable]			
Options	→ Trig	Start	[Start / Trip / OnCmd / REUserLg / FEUserLG]			
Timers	→ tPre	0.50	s	(0.01÷0.50)	step	0.01 s
	→ tPost	0.50	s	(0.01÷1.50)	step	0.01 s

17.31.1 - Description of variables

☐ Disable	:	Function enabling (Disable / Enable)
☐ Trig	:	Selection of the Trigger command source (start recording):
		<i>Start</i> = Trigger on time start of protection functions
		<i>Trip</i> = Trigger on trip (time delay end) of protection functions
		<i>OnCmd</i> = On Asynchronous Force trigger command
		<i>REUserLg</i> = On rising edge of "User Logic"
		<i>FEUserLg</i> = On falling edge of "User Logic" (see § "OscilloTriggerLogic")
☐ tPre	:	Recording time before Trigger
☐ tPost	:	Recording time after Trigger

17.31.2 - Operation

In the options: "Trig = Start" and "Trig = Trip", the oscillographic recording starts respectively when any protection function starts operating or trip.

T>	1I>	1dI	Rapp	Wi	1U>
	2I>	2dI	Iapp	RT	2U>
	3I>	1di/dt	1Ig	RTX	1U<
	4I>	2di/dt	2Ig		2U<

In the option "ExtInp", the oscillographic record starts when the Digital Input is activated

The "Osc" Function includes the wave Form Capture of the input quantities (I, U, Ig, Ug) and can totally store a record of 6 seconds.

The number of events recorded depends on the duration of each individual recording (tPre + tPost).

In any case the number of event stored can not exceed ten (10 x 0.6 sec).

Any new event beyond the 6 sec capacity of the memory, cancels and overwrites the former records (FIFO Memory).

Example: "10x0.6s" or "9x0.66" or "8x0.75" etc.

17.31.3 – Available on MCom2

T>	Tal T>	(alarm) (trip)	Thermal element
1I>	1I> t1I>	(Start) (Trip)	First overcurrent element
2I>	2I> t2I>	(Start) (Trip)	Second overcurrent element
3>	3I> t3I>	(Start) (Trip)	Third overcurrent element
4I>	4I> t4I>	(Start) (Trip)	Fourth overcurrent element
1dI	1dI t1dI	(Start) (Trip)	First Current step element
2dI	2dI t2dI	(Start) (Trip)	Second Current step element
1di/dt	1di/dt t1di/dt	(Start) (Trip)	First Current rate of rise element
2di/dt	2di/dt t2di/dt	(Start) (Trip)	Second Current rate of rise element
Rapp	Rapp	(Trip)	Impedance monitoring – di/dt dependence
Iapp	Iapp		Current monitoring with di/dt dependence
1Ig	1Ig t1Ig	(Start) (Trip)	First instantaneous Frame Fault element First time delayed Frame Fault element
2Ig	2Ig t2Ig	(Start) (Trip)	Second Frame Fault element
RCL	RCL cmd ARP ARF ARL	(Trip)	Reclosure Shot command Autoreclosure in progress Autoreclosure Failure Autoreclosure Lock-out
1U>	1U> t1U>	(Start) (Trip)	First overvoltage element
2U>	2U> t2U>	(Start) (Trip)	Second overvoltage element
1U<	1U< t1U<	(Start) (Trip)	First undervoltage element
2U<	2U< t2U<	(Start) (Trip)	Second undervoltage element
Wi	tWi>		Circuit breaker maintenance level
TCS	tTCS	(Trip)	Time delayed Trip Circuit Supervision
IRF	IRF tIRF	(Start) (Trip)	Time delayed Internal relay Fault Instantaneous Internal relay Fault
RT	RT tRT	(Trip) (Start)	First Instantaneous Remote Trip First Time delayed Remote Trip
RTX	RTX tRTX	(Trip) (Start)	Second Instantaneous Remote Trip Second Time delayed Remote Trip
CB-L	CB-L		C/B reclose Lock-out
BF	BF		Breaker Failure
Wh	+ Wh - Wh		Imported Energy counter Pulse Exported Energy counter Pulse
L/R CB Cmds	Open C/B Close C/B LocRemInc missCBOpe		Open C/B command Close C/B command Local / Remote Inconsistency Missed C/B opening (Digital input missing)
LT	LTPb LTP LTF LT cmd	(Trip)	Output to operate an external flashing lamp signalling line test in progress Line Test in progress Line Test Failed Line Test command
	Gen.Start Gen.Trip		General start General Trip

Vcc	Reserved		
Gnd	Reserved		
ResLog	Reset signal logic		
P1	Push-button Open		
P2	Push-button Close		
UserTriggerOscillo	User Variable for Oscillographic Recording		
UserVar<0> to UserVar<24>	User Variable		
0.D1 0.D1Not to 0.D4 0.D4Not	Digital Input "0.D1" Digital Input "0.D1" Digital Input "0.D4" Digital Input "0.D4"	activated deactivated activated deactivated	Digital Input on Main Relay
1.D1 1.D1Not to 1.D15 1.D15Not	Digital Input "1.D1" Digital Input "1.D1" Digital Input "1.D15" Digital Input "1.D15"	activated deactivated activated deactivated	Digital input on Expansion Board
2.D1 2.D1Not to 2.D15 2.D15Not	Digital Input "2.D1" Digital Input "2.D1" Digital Input "2.D15" Digital Input "2.D15"	activated deactivated activated deactivated	Digital input on Expansion Board

17.31.4 – Setting “Oscillo Trigger Logic”

The “**OSCILLO TRIGGER LOGIC**” is a result of a logical operation (Or, AND, ecc...), it can be used like other logical output. This operation is possible only via “MCom2” software.

Name	User descr.	Linked functions	OpLogic	Timer	Timer type	Logical status
------	-------------	------------------	---------	-------	------------	----------------

17.31.4.1 - Name

Internal name

17.31.4.2 - User descr.

Fixed

17.31.4.3 - Linked functions

Selection functions

17.31.4.4 - OpLogic

Operation Logic = [None, OR, AND, XOR, NOR, NAND, NOT, Ff-SR, Counter, Rise-UP, Fall-Down]

16.31.4.5 - Timer

Time delay (0-10)s, step 0.01s

17.31.4.6 - Timer type

Timer	=	<i>Delay</i>	:	Add a delay on output activation. The “Timer” is edge triggered on rise edge.
		<i>Monostable P</i>	:	Monostable Positive pulse time
		<i>Monostable N</i>	:	Monostable Negative pulse time
		<i>Blink</i>	:	When selected output is a 50% duty cycle square wave
		<i>Drop Off</i>	:	Time added on falling output edge


17.31.4.7 - Logical status

“OscilloTriggerLogic” Logical status


17.31.4.8 - Example: Setting "User Variable"

Open "MSCom2" program and connect to the relay.

Select "Change Windows" from "Menu" button



Select "User Variable"

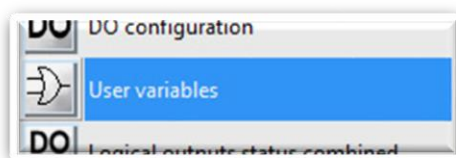


Setting for "User Trigger Oscillo" : "**1I>/2I>/3I>**", "**AND**", "**1**", "**Monostable P**".



ID	Name	User descr.	Linked functions	OpLogic	Timer	Timer type	Logical status
1	UserTrigger Oscillo	OscilloTrigger.logic		None	0	Delay	0
2	UserVar <0>	Gate.1.....		None	0	Delay	0

17.31.4.9 - "Linked Functions"

Select "**Linked Functions**" related to "User Trigger Oscillo" and press right button on mouse, select "Value change":

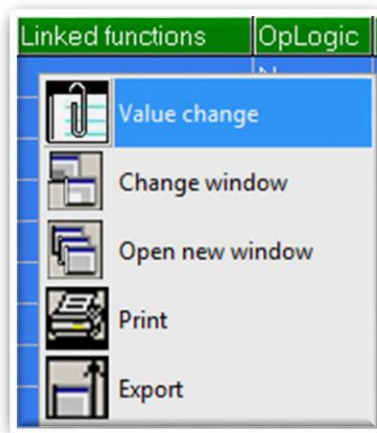


Select "**1I>, 2I>, 3I>**" from "Available" box via push-button "<Add", and press "OK".
For remove functions, use push-button ">Remove".

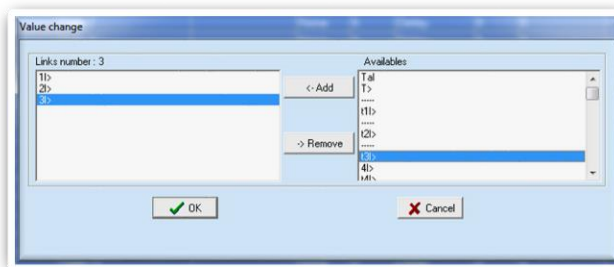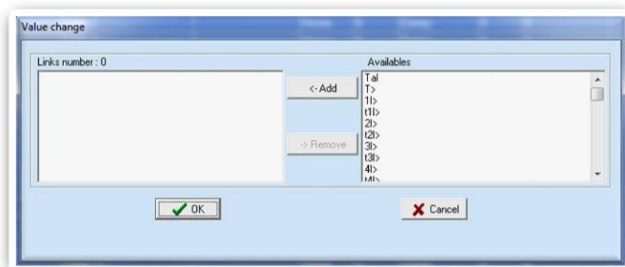


17.31.4.10 - "Operation Logic" (Oplogic)

Select "**Oper Logic**" related to "User Trigger Oscillo" and press right button on mouse, select "Value change":




Insert "**AND**" into box and press "OK":

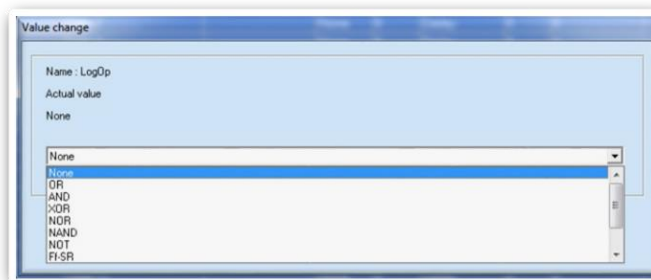


17.31.4.11 - "Timer"

Select "**Timer**" related to "User Trigger Oscillo" and press right button on mouse, select "Value change":

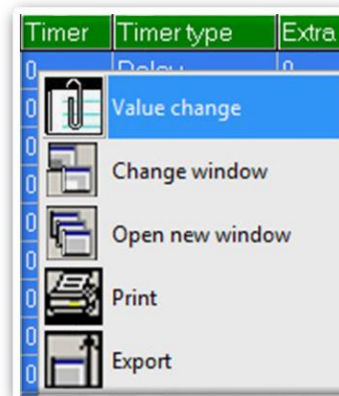


Select "**1**" into box and press "OK":

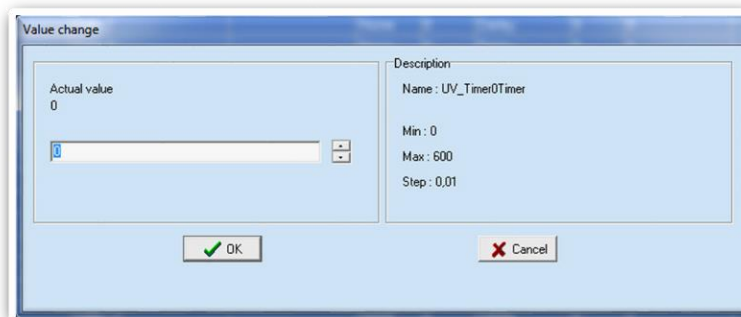


17.31.4.12 - "Timer type"

Select "**Timer**" related to "User Trigger Oscillo" and press right button on mouse, select "Value change":

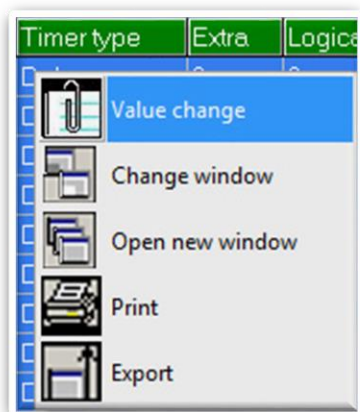

Select "**Monostable P**" into box and press "OK":

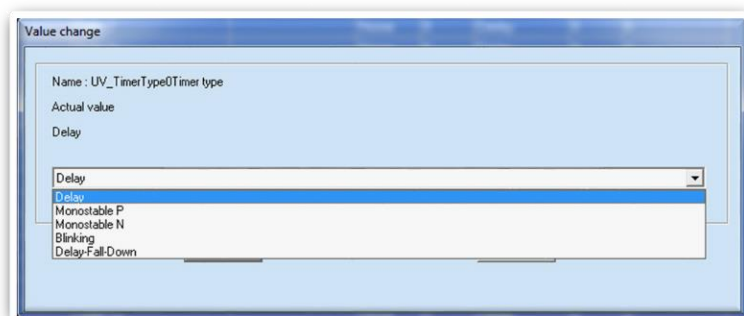

17.32 - Function: **L/R CB Cmds** (Local Remote Close Breaker Commands)

This menu allows to configure the command for C/B operation.

C/B Local command in Front Face panel



C/B Open control



C/B Close control

Options	→	LocRm	Disable	[Enable / Disable]			
	→	LineT	Disable	[Enable / Disable]			
	→	Key	Enable	[Enable / Disable]			
Timers	→	tLRIn	0.05	s	(0.05 ÷ 1.00)	step	0.05 s
	→	tOpen	1.00	s	(0.05 ÷ 2.00)	step	0.01 s

17.32.1 - Description of variables

- ☐ **LocRm** : Enable/Disable [Local/Remote] Digital input.
- ☐ **LineT** : Line Test Enable/Disable
If Enabled = Line Test will be started any time C/B Close control is activated.
- ☐ **Key** : *Enable* = The C/B can be controlled by the pushbuttons available on Relay's Front Face as well as by commands sent via the serial communication bus.
Disable = The pushbuttons on Front Panel are disabled; the operation of the C/B can be controlled either by the serial bus commands or by (password protected) commands available in the menu "**Commands**".



C/B Open control.



C/B Close control.
- ☐ **tLRIn** : Local/Remote inconsistent time.
- ☐ **tOpen** : C/B operation time-out.

17.33 - Function: CB-L (Lock C/B reclosure)

This menu allows to configure the command lock for C/B.

Options	→	Lock	Enable
----------------	---	-------------	--------

[Enable / Disable]

17.33.1 - Description of variables

- ☐ **Lock** :

Enable = Enabling of the close command lock-out.

Disable = Disabling of the close command lock-out.
-

17.33.2 - Operation

If the variable "Lock" is set to "Enable", reclosing of the C/B is inhibited after a "Failed reclosure" or after a "Failed Line Test". The reset from the Lock-out status can be operated either by the keyboard via the "CB Unlock" command available in the menu "Commands" (§ Commands) or by an external command via the Digital Input programmed for "Ext.Reset".

17.34 - Function: **LT** (Automatic Line Test)

Options	→	TNum	1	[0 / 1 / 2 / 3]				
	→	Fast	No	[No / Yes]				
	→	Rem	No	[No / Yes]				
Levels	→	Vv<	0.5	Vn	(0÷1.00)	step	0.001	Vn
	→	Vm<	0.5	Vn	(0÷1.00)	step	0.001	Vn
	→	Rr<	100	Ω	(0÷500)	step	0.1	Ω
	→	VFast	0.5	Vn	(0.5÷1.00)	step	0.1	Vn
Timers	→	tp	3	s	(0÷30)	step	1	s
	→	tt	3	s	(1÷10)	step	1	s
	→	tcy	10	s	(1÷60)	step	1	s
	→	tw	3	s	(0÷10)	step	1	s

17.34.1 - Description of variables

- ☐ **TNum** : Number of tests after an unsuccessful test.
- ☐ **Fast** : When set to "Yes" if the voltage measured during the set pre-closing time [tp] exceeds the set level [VFast], the C/B is closed immediately without the Line Test. If set "No" test is normally carried out.
- ☐ **Rem** : Remote line test; if "Yes" Line Test can be started by the logical output RCL
- ☐ **Vv<** : Voltage (after C/B) level to allow C/B closing.
- ☐ **Vm<** : Voltage (before C/B) level to allow C/B closing.
- ☐ **Rr<** : Minimum Residual Resistance level to allow C/B closing.
- ☐ **VFast** : Minimum Line Voltage level to allow C/B closing without Line Test.
- ☐ **tp** : Waiting time after C/B closing command request to start the line test cycle.
- ☐ **tt** : Duration of the Line Test.
- ☐ **tcy** : Wait time between two consecutive tests.
- ☐ **tw** : Wait time to start reclosing after success fine test.

17.34.2 - Operation

The Line Test is started by a request of Automatic Reclosure or Manual Closure of the C/B (see § "RCL" and § "L/R C/B Cmds").

It is also possible to start the Line Test by activating a Digital Input programmed for this purpose (see § Remote Line Test control).

Test is considered successful depending on "Vv<", "Vm<" and "Rr<" measurement according to programming.

Vm<	Setting Vv<	Rr<	Test condition
≠0	≠0	≠0	$Vv \geq [Vv<] \ \& \ Vm \geq [Vm<] \ \& \ Rr \geq [Rr<]$
≠0	≠0	=0	$Vv \geq [Vv<] \ \& \ Vm \geq [Vm<]$
=0	=0	≠0	$Rr \geq [Rr<]$


If the test was unsuccessful:

- If "Test N°=0" C/B reclosing blocked
- If "Test N°=1,2,3" The timer "tcy" is started and, at the end of "tcy" the test is repeated only 1 or 2 or three times before the C/B reclosing is blocked (if one of the tests is successful, "tw" is started and then the C/B closed).


17.34.4 - Display status indication

Display of Line Test status

- **Standby** Line Test in standby
- **Ready** Line Test Ready
- **Fail** Line test failure

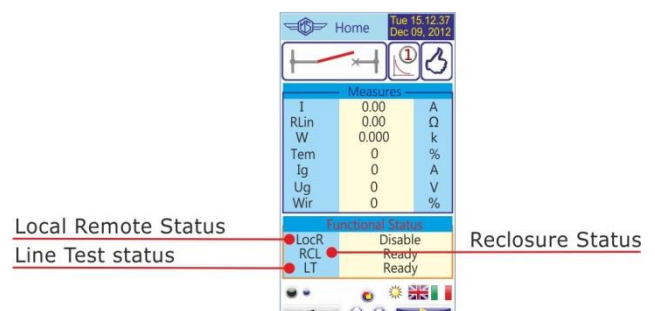

17.34.3 - Flow chart

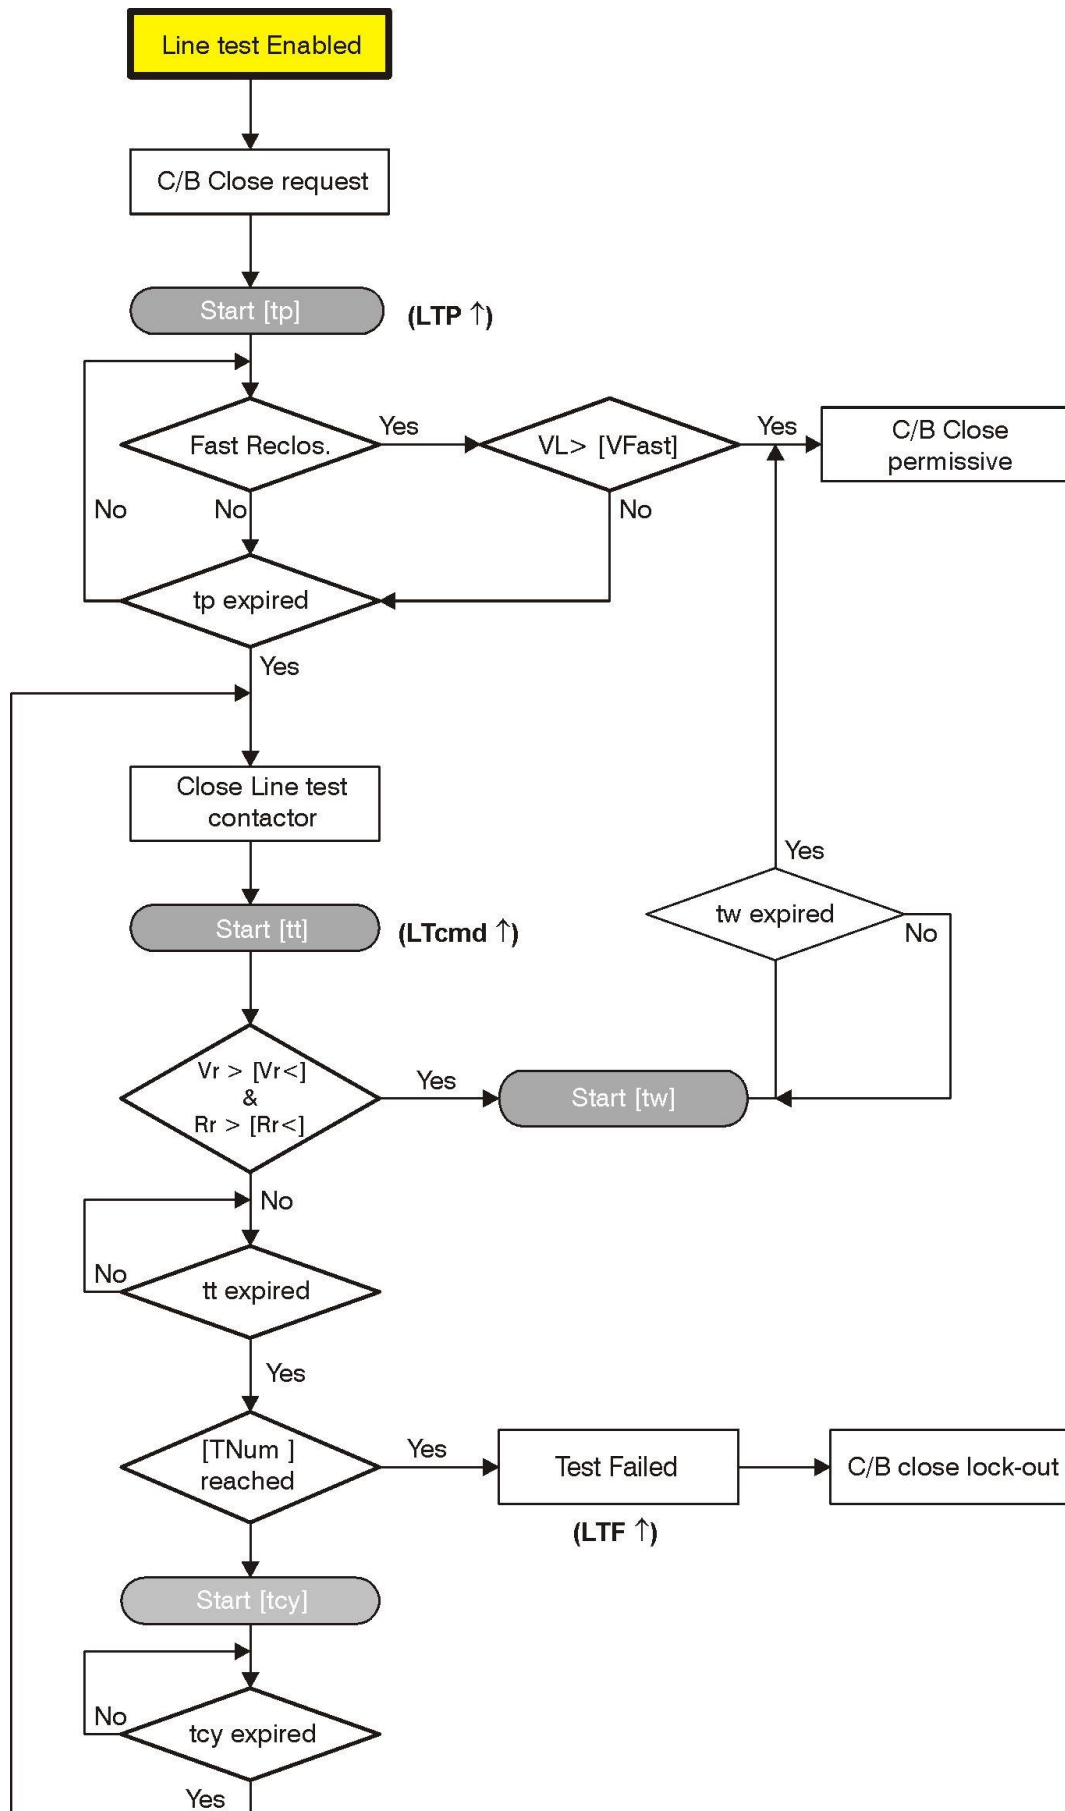

17.35 - Function: **ExtReset** (External Reset Configuration)

This menu allows to select the edge polarity of the signal on the digital input configured to reset the relay after a trip.

The reset input will reset all the output relays configured as manual reset (latched), the signalisation of the trip on the display and the indication of the LED are cleared also.

Options → **ActOn** RiseEdge [RiseEdge / FallEdge]

17.35.1 - Description of variables

- ☐ **ActOn** : **RiseEdge** Active on Rise Edge (Digital Input close).
FallEdge Active on Fall Edge (Digital Input open).

17.36 - Function: **Dia C/B** (Diagnostic C/B position)

In this menu it is possible to configure the CB incongruence function.

Status → **Disable** [X 0 ↓] [X 0 ↓ Disable / ✓ 0 ↑ Enable]

Timers	→								
	→	tCB1f	3.00	s	(0 ÷ 10)	step	0.1	s	
	→	tCB2f	3.00	s	(0 ÷ 10)	step	0.1	s	
	→	tCB3f	3.00	s	(0 ÷ 10)	step	0.1	s	

17.36.1 - Description of variables

- ☐ **Disable** : Function enabling (Disable / Enable)
- ☐ **tCB1f** : C/B1 Diagnostic position discrepancy filter time
- ☐ **tCB2f** : C/B2 Diagnostic position discrepancy filter time
- ☐ **tCB3f** : C/B3 Diagnostic position discrepancy filter time

17.36.2 - Operation

For each auxiliary CB is possible set the incongruence status of its auxiliary contact (1NO e 1 NC). In case the two contacts are in the same status (open are close) for a time longer then tCBxf, a variable (linkable) is set.

18. Input – Output (Via Keyboard or MCom2 software)

The firmware can manage up to 28 digital inputs and 24 output relays; among these, 4 digital inputs and 6 output relays are available on the relay module, the remaining are available on additional expansion modules controlled via the CAN-Bus communication channel:

14DI	Module	(Board 1)	=	14 Digital Inputs
14DO	Module	(Board 2)	=	14 Outputs Relay
UX10-4	Module	(Board 3)	=	10 Digital Inputs - 4 Outputs Relay

The interfacing software "MCom2" also allows to program the operation of the output relays (Physical Output), and Digital Inputs (see MCom2 Manual).

18.1 – Digital Input

→	0.D1	Programmable (D1)	When the relevant terminals are open and get activated when the relevant terminals are shorted by an external cold contact.	<i>Available in the relay</i>
→	0.D2	Programmable (D2)		
→	0.D3	Programmable (D3)		
→	0.D4	Programmable (D4)		
→	1.D1	Inputs	<i>Digital input on</i>	Any digital input of the expansion modules is active when the relevant terminals (see wiring diagram) are shorted.
→	1.D--	"D8", "D16" not available	<i>Expansion Board 1</i>	
→	1.D15			
→	2.D1	Inputs	<i>Digital input on</i>	
→	2.D--	"D8", "D16" not available	<i>Expansion Board 2</i>	
→	2.D15			

Three of them (0.D1, 0.D2, 0.D3) are deactivated, when the relevant terminals are open and get activated when the relevant terminals are shorted by an external cold contact.

The operation of the Input "0.D4" is dependent on the value "R" of resistance of the external circuit connected to its terminals (38-19):

- Activated if " $R < 50\Omega$ " or " $R > 3000\Omega$ ". - Deactivated if " $50\Omega \leq R \leq 3000\Omega$ ".

Therefore, if the terminals "38-19" are open-circuited, the input "0.D4" is activated; for using "0.D4" as A normal Digital Input simply controlled by an external cold contact, it is necessary to permanently connect across the terminal's "38-19" (in parallel to the external contact) a load resistor of value between 50 and 3000 Ω (example 1000 Ω - 0.5W).

18.2 – "DI" Configuration parameter available (via keyboard or MCom2 software)

Any of the Digital Inputs can be programmed to control one or more of the following functions.

C/B1-Close	Close position status	Bi2didt	Blocking input to the 2didt
C/B1-Open	Open position status	BiRCL	Reclosure lock-out RCL
C/B1-I/D	Insertion status	Bypass-LT	Line test bypass
C/B2-Close	Close position status	Bi1U<	Blocking input to the 1U<
C/B2-Open	Open position status	Bi2U<	Blocking input to the 2U<
C/B2-I/D	Insertion status	Main C/B CL.Status	Circuit breaker status
C/B3-Close	Close position status	RT	Remote Trip input
C/B3-Open	Open position status	RTX	Second Remote Trip input
C/B3-I/D	Insertion status	BiSelfT	Blocking input self Trip
C/B4-Close	Close position status	Local	Local mode operation
C/B4-Open	Open position status	Remote	Remote mode operation
C/B4-I/D	Insertion status	Open CB	Open C/B Command
C/B5-Close	Close position status	Close CB	Close C/B Command
C/B5-Open	Open position status	BiOpenCB	Blocking input open CB
C/B5-I/D	Insertion status	BiCloseCB	Blocking input close CB
Bi1I>	Blocking input to the 1I>	RemLT	Remote line test input
Bi2I>	Blocking input to the 2I>	BiLT	Blocking input LT
Bi3I>	Blocking input to the 3I>	Ext Reset	External Reset input
Bi4I>	Blocking input to the 4I>	SetupGroup 1-2	Selection of the setting
Bi1didt	Blocking input to the 1didt		

18.3 – Function available

In this list are show the functions that can be associated with digital inputs or output relay.

T>	Tal T>	Alarm Trip	Thermal Image T>
1I>	1I> t1I>	Start Trip	First overcurrent element F50-51
2I>	2I> t2I>	Start Trip	Second overcurrent element F50-51
3I>	3I> t3I>	Start Trip	Third overcurrent element F50-51
4I>	4I> t4I>	Start Trip	Fourth overcurrent element F50-51
1dl	1dl t1dl	Start Trip	First current step element
2dl	2dl t2dl	Start Trip	Second current step element
1di/dt	1di/dt t1di/dt	Start Trip	First current rate of rise element
2di/dt	2di/dt t2di/dt	Start Trip	Second current rate of rise element
Rapp	Rapp		Impedence monitoring di/dt dependance
Iapp	Iapp		Current monitoring with di/dt dependance
1Ig	1Ig t1Ig	Start Trip	First frame fault element
2Ig	2Ig t2Ig	Start Trip	Second frame fault element
RCL	RCL cmd ARP ARF ARL		Automatic reclosure comand Autoreclosure in progress Autoreclosure Failure Autoreclosure Lock-out
1U>	1U> t1U>	Start Trip	First overvoltage element
2U>	2U> t2U>	Start Trip	Second overvoltage element
1U<	1U< t1U<	Start Trip	First undervoltage element
2U<	2U< t2U<	Start Trip	Second undervoltage element
Wi	tWi>	Trip	Circuit breaker maintenance level
TCS	tTCS		Trip circuit supervsion
IRF	IRF tIRF	Start Trip	Internal relay default
RT	RT tRT	Start Trip	First element RemoteTrip

CB-L	CB-L	Lock C/B reclosure
RTX	RTX tRTX	Start Trip Second element RemoteTrip
BF	BF	Breaker Failure
Wh	+Wh -Wh Open CB	Imported Energy counter Pulse Exported Energy counter Pulse Open C/B command
L/R CB Cmds	Close CB LocRemInc missCBOpe	Close C/B command Local / Remote Inconsistency Missed C/B opening (Digital input missing)
LT	LTPb LTP LTF LT cmd	Output to operate an external flashing lamp signalling line test in progress Line Test in progress Line Test Failed Line Test Command
	Gen.Start Gen.Trip	Start Geniric Trip Generic
	UserTriggerOscillo	User Variable for Oscillographic Recording
	UserVar <0> to..... UserVar <24>	User Variable
	Vcc	Reserved
	Gnd	Reserved
	ResLog	Reset signal logic
	P1 P2	Push-button Open Push-button Close


Only for "DIGITAL INPUT"

0.D1 0.D1Not to 0.D4 0.D4Not	Digital Input "0.D1" Digital Input "0.D1" Digital Input "0.D4" Digital Input "0.D4"	activated deactivated activated deactivated	Digital Input on Main Relay
1.D1 1.D1Not to 1.D15 1.D15Not	Digital Input "1.D1" Digital Input "1.D1" Digital Input "1.D15" Digital Input "1.D15"	activated deactivated activated deactivated	Digital input on Expansion Board
2.D1 2.D1Not to 2.D15 2.D15Not	Digital Input "2.D1" Digital Input "2.D1" Digital Input "2.D15" Digital Input "2.D15"	activated deactivated activated deactivated	Digital input on Expansion Board


Only for "OUTPUT RELAY"

0.R1 to 0.R6	Output relays on Main Relay
1.R1 to 1.R14	Output relays on Expansion Board
2.R1 to 2.R14	Output relays on Expansion Board

18.4 – "InpCfg" Inputs Configuration - via Touch Screen


- 


- Press " " or " " to access to the "Desktop" menu with icons.
- 

- Press " " to access to the settings menu.
- 

- Select Input "**Bi1I>**" from list.
- 

- Press "**Link**".
- 


- Load parameters.....
- 

- Select "**T>**" from list.
- 


- The box show "**Bi1I>=T>**".
 - The function is Linked
- 

- To link multiple functions to digital input, use "**USER VARIABLES**".

18.5 – "InpView" Inputs Status View - via Touch Screen

- 

- Press " " or " " to access to the "Desktop" menu with icons.
- 

- Press " " to access to the settings menu.
- 

- This list shows actual status of digital inputs.

Expansion Board		Expansion Board		Signalization Leds	
	Assigned		Not Assigned/Present		Inputs active
	Assigned		Not Assigned/Present		Inputs not active
	Assigned		Not Assigned/Present		Inputs not present
	Assigned		Not Assigned/Present		

18.6 – "DI" Configuration - via MCom2 software

18.6.1 – Example

Name	Status	OpLogic	Functions
------	--------	---------	-----------

18.6.2 - Name

Logical Input name

18.6.3 - Status

Logical Input status

18.6.4 - OpLogic

Operation Logic = [None, OR, AND, XOR, NOR, NAND, NOT, Ff-SR]

18.6.5 - Functions

Function available.


18.6.6 - Example: Setting "Digital Input"

Open "MCom2" program and connect to the relay.

Select "Change Windows" from "Menu" button



Select **DI CONFIGURATION**

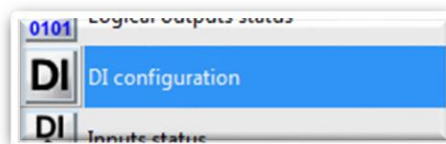


Setting for **BI11>** : **11>**.


Name	Status	OpLogic	Functions
BI11> (Blocking Input 11>)	Not active	None	11>

18.6.7 - "Functions"

Select "**Functions**" related to "Bi1I>" and press right button on mouse, select "Value change":

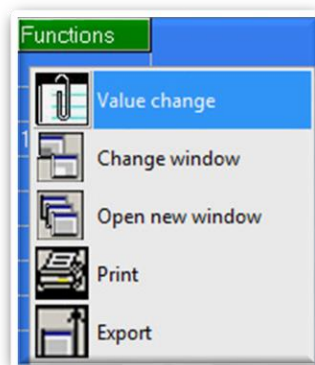

From box "Available", select "1I>" and press "Add".
Press "OK" for confirmation. (if Password is request, see § Password)

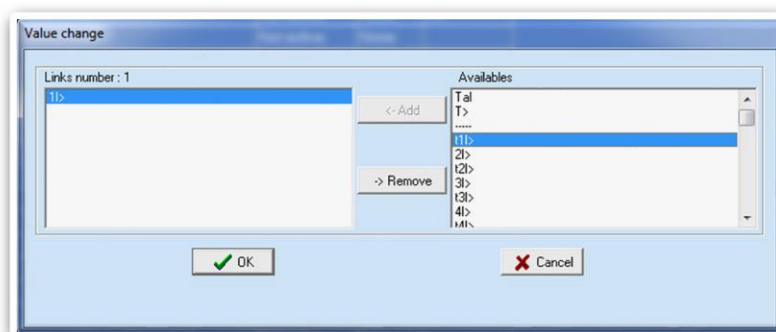






18.7 – Outputs Relay





The output relay are fully user programmable and controlled by any protection functions and by any digital inputs.

→ 0.R1	Programmable (R1)	<i>Available on the relay</i>
→ 0.R2	Programmable (R2)	
→ 0.R3	Programmable (R3)	
→ 0.R4	Programmable (R4)	
→ 0.R5	Programmable (R5)	
→ 0.R6	Programmable (R6)	
→ 1.R1	Programmable	<i>Output Relays on Expansion Board</i>
→ 1.R--		
→ 1.R14		

Any Output Relay can be programmed to be controlled (energized) by one or more of the following functions or Digital Inputs, see § Function available

18.8 – "OutCfg" Outputs Configuration - via Touch Screen

1 	• Press " " or " " to access to the "Desktop" menu with icons.	2 	• Press " " to access to the settings menu.	3 	• Select Input "0.R1" from list.
4 	• Press "Link".	5 	• Load parameters.....	6 	• Select "2I>" from list.
7 	• The box show "0.R1=2I>". • The function is linked.	8 To link multiple functions to Outputs Relay, use " USER VARIABLES ".		9 	• Press "Timers".

- | | | | | | | | | |
|-----------|---|---|-----------|---|---|-----------|---|--|
| 10 |  | <ul style="list-style-type: none"> • Press the value (number) to change it. • Insert the password (if request). | 11 |  | <ul style="list-style-type: none"> • Press "Options". | 12 |  | <ul style="list-style-type: none"> • Press "ModeOper", to select the Operative Mode. |
| 13 |  | <ul style="list-style-type: none"> • Select the "Operative Mode" needed. | 14 |  | <ul style="list-style-type: none"> • Press "Contact", to select the contact status. | 15 |  | <ul style="list-style-type: none"> • Select the "contact" needed. |

18.9 – "OutCfg" Outputs Configuration - via MCom2 software

18.9.1 – "Example"

ID	Relay	Linked functions	OpLogic	Logical status	Output config	Function	tON	Relay status
1	0.R1 [Master board, R:1]		None	Off	Normally Deenergized	Automatic reset	0.1	Off

18.9.2 – "Relay"

Relay internal name

18.9.3 – "Linked function"

Select the function for tripping the output relay (for multiple association use "User Variable")

18.9.4 – "Operation Logic"

Operation Logic = Not used

18.9.5 – "Logical Status"

Relay Logical status

18.9.6 – "Output Configuration"

Normally Deenergized	The output relay is deenergized in normal conditions and gets energized on activation of the controlling Functional Output; reset means deenergizing.
Normally Energized	The output relay is energized in normal conditions and gets deenergized on activation of the controlling Functional Output; reset means energizing.

18.9.7 – "tON - Operation Time"

This timer controls the duration of the activation of the output relay.


tON : 0 (0.01-10)s, step 0.01s

18.9.8 – "Relay Status"

Relay – Physical status

18.9.9 - Functions - Operation Mode

- Automatic** : In this mode the output relay is "operated" (energized if "**N.D.**", deenergized if "**N.E.**") when the controlling Functional Output is activated and it is reset to the "non operated" condition when the Functional Output gets deactivated but, anyhow, not before the time "**TON**" has elapsed (minimum duration of the operation time)
- Manual** : In this mode the output relay is "operated" when the controlling Functional Output is activated and remains in the operated condition until a manual reset command is issued by the relay keyboard (local commands menu) or via the serial communication. In this mode the timer "**TON**" has no effect.
- Impulsive** : In this mode the output relay is "operated" when the controlling Functional Output is activated and it remains in the "operated" condition (energized if "**N.D.**", deenergized if "**N.E.**") for the set time "**TON**" independently from the status of the controlling Functional Output.

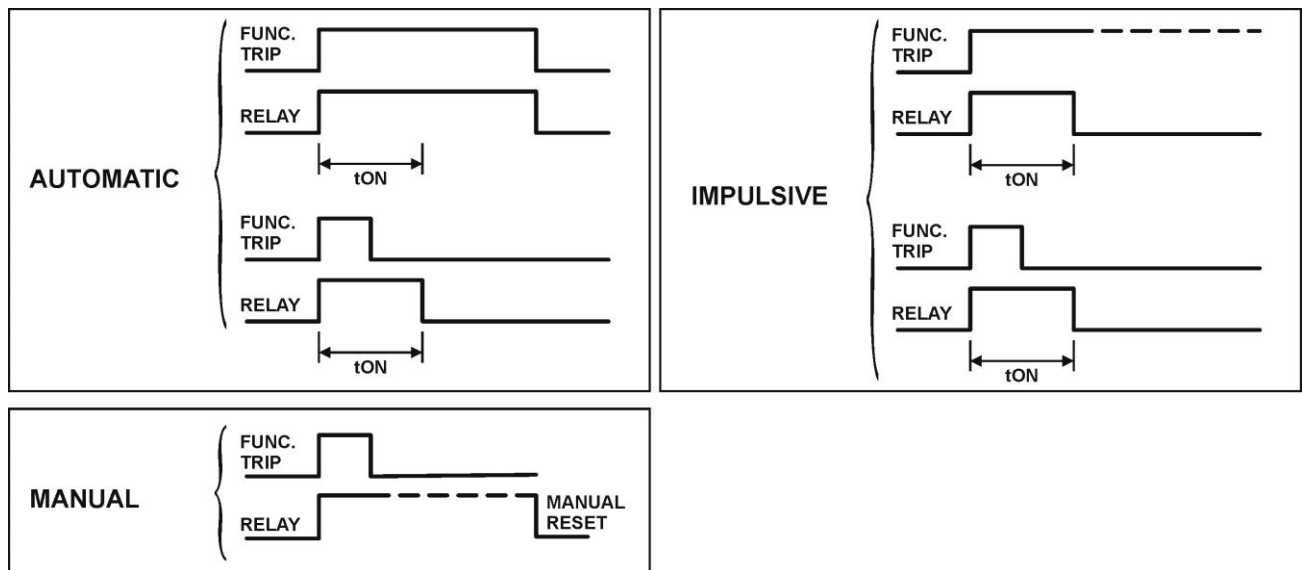


Open "MSCom2" program and connect to the relay.

Select "Change Windows" from "Menu" button



Select "**DO CONFIGURATION**"

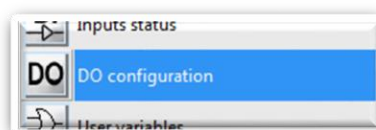


18.9.10 - Example: Change settings for "0.R1"

Change settings for "**0.R1**" : "1I>", "Normally Energized", "Pulse", "0.5".


ID	Relay	Linked functions	OpLogic	Logical status	Output config	Function	tON	Relay status
1	0.R1 [Master board, R:1]		None	Off	Normally Deenergized	Automatic reset	0.1	Off

18.9.10.1 - "Linked Functions"

Select "**Linked Functions**" related to "0.R1" and press right button on mouse, select "Value change":




From box "Available", select "1I>" and press "Add".
Press "OK" for confirmation. (if Password is request, see § Password)

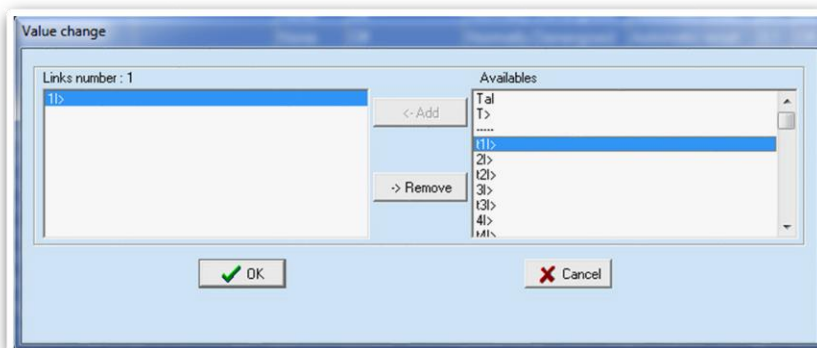


18.9.10.2 - "Output Config"

Select "**Output Config**" related to "0.R1" and press right button on mouse, select "Value change":




Select "**Normally Energized**" from combo box and press "OK" (if Password is request, see § Password)

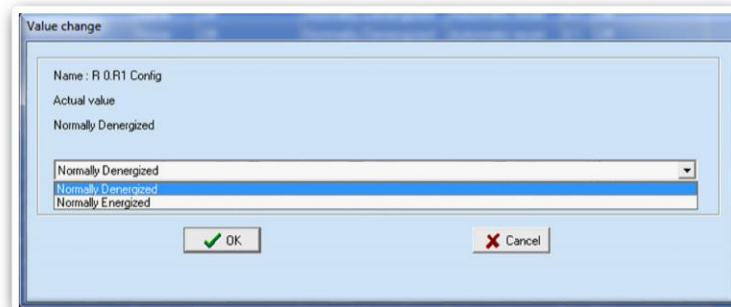


18.9.10.3 - "Function"

Select "**Function**" related to "0.R1" and press right button on mouse, select "Value change":




Select "**Pulse**" from combo box and press "OK" (if Password is request, see § Password):

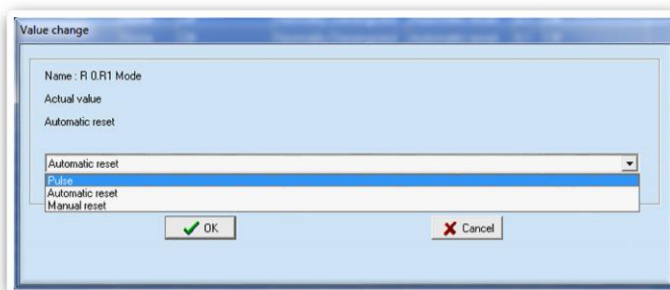


18.9.10.4 - "tON"

Select "**tON**" related to "0.R1" and press right button on mouse, select "Value change":



Select "**0.5**" from combo box and press "OK" (if Password is request, see § Password):

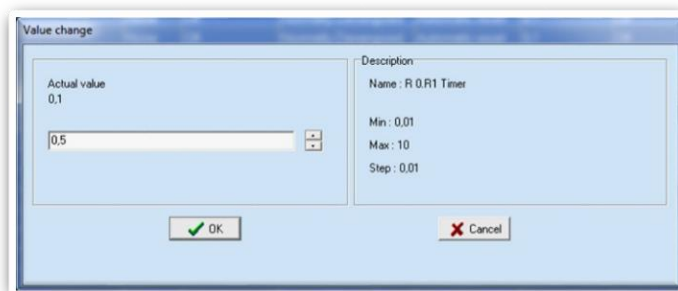

19. UserVar

The "User Variable" is a result of a logical operation (OR, AND, ecc...), it can be used like other logical output.

19.1 – Configuration – via Touch Screen

	Logic gate / components ("Up Counter")		Button not active
	Functions assigned		Button not active
	Timer		Button not active
	Preset (is available only with "Up Counter"enable)		Button not active

19.1.1 – Selection Gate

- 
 - Press " " or " " to access to the "Desktop" menu with icons.
- 
 - Press " " to access to the settings menu.
- 
 - Load parameters.....
- 
 - Select "Gate.1" from list.

19.1.2 – "Logic"

Operation Logic = [None, OR, AND, XOR, NOR, NAND, NOT, Ff-SR]

19.1.2.1 – "Logic"

1



- Press "Logic" to access to the Logic menu.

2



- Select "Logic" to assign the logic gate.

3



- Select "Logic" needed.
- When the parameter is select, the display return at point 2

4



- The icon "Logic" shows "AND"

19.1.2.2 – "Timer"

<i>Delay</i>	: Add a delay on output activation. The "Timer" is edge triggered on rise edge.
<i>Impulse P</i>	: Monostable Positive pulse time
<i>Impulse N</i>	: Monostable Negative pulse time
<i>Blink</i>	: When selected output is a 50% duty cycle square wave
<i>Drop Off</i>	: Time added on falling output edge

1




- Press "Timer" to access to the Logic menu.

2




- Select "Timer" to assign the type of time.

3



- Select "Timer" needed.
- When the parameter is select, the display return at point 2

4





- The icon "Timer" shows "Impulse N"

19.1.3 – "Link" (example without "Logic" assigned)



	Button to add the selected parameter		Button not active
	Button to remove the selected parameter		Button not active
	Button to return to pre-existent parameters		Button not active
	Button to remove all parameter		Button not active
	Button to confirm parameter selected		Button not active

In this mode (no logic), you can only assign one item to the gate

- 
 - Press " " to access to the Link page.
- 
 - Select element (ex. Tal)
 - Press  to assign.
- 
 - The "Tal" parameter is showed in the box.
 - Press  to confirm.

19.1.4 – "Link" (example with "Logic = AND" assigned)

In this mode (logic), you can assign various items (max. 8 items) to the gate


- 
 - Press " " to access to the Link page.
- 
 - Select element "Tal"
 - Press  to assign.
- 
 - The "Tal" parameter is showed in the box.
 - Press  to confirm.
- 
 - Select element "1i>"
 - Press  to assign.
 - Press  to confirm.

19.1.5 - "Timer"

- 1**


 - Press "  " to access.

2


 - Press the value (number) to change it.
 - Insert the password (if request).
 - Press the value (number) and set timer value.


19.1.6 - "Preset"

This menu is available only with "Up Counter" enable

- 1**


 - Press "  " to access.

2


 - Press the value (number) to change it.
 - Insert the password (if request).
 - Press the value (number) and set timer value.

19.2 – Configuration – via MCom2 software

Name	User descr.	Linked functions	OpLogic	Timer	Timer type	Extra	Logical status
------	-------------	------------------	---------	-------	------------	-------	----------------

19.2.1 - Name

Internal progressive name

19.2.2 - User Descr.

Custom identification label for user variable

19.2.3 - Linked functions

Selection functions

19.2.4 - OpLogic

Operation Logic = [None, OR, AND, XOR, NOR, NAND, NOT, Ff-SR]

19.2.5 - Timer

Time delay (0-10)s, step 0.01s

19.2.6 - Timer type

<i>Delay</i>	:	Add a delay on output activation. The "Timer" is edge triggered on rise edge.
<i>Impulse P</i>	:	Monostable Positive pulse time
<i>Impulse N</i>	:	Monostable Negative pulse time
<i>Blink</i>	:	When selected output is a 50% duty cycle square wave
<i>Drop Off</i>	:	Time added on falling output edge


19.2.7 - Logical status

"User Variable" Logical status


19.2.8 - Example: Setting "User Variable"

Open "MSCom2" program and connect to the relay.

Select "Change Windows" from "Menu" button

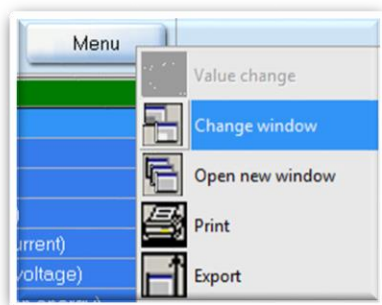

Select **"USER VARIABLE"**

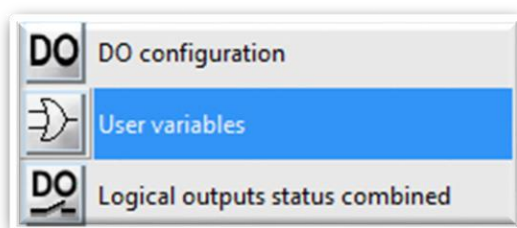


Setting for **"UserVar<0>"** :

"Start Overcurrent Element", "1I>, 2I>, 3I>", "OR", "1", "Monostable P".


Name	User descr.	Linked functions	OpLogic	Timer	Timer type	Extra	Logical status
UserTrigger Oscillo	UserTrigger Oscillo		None	0	Delay	0	0
UserVar <0>	UserVar <0>		None	0	Delay	0	0

19.2.8.1 - "User description" (User descr.)

Select "**User descr**" related to "UserVar<0>" and press right button on mouse, select "Value change":

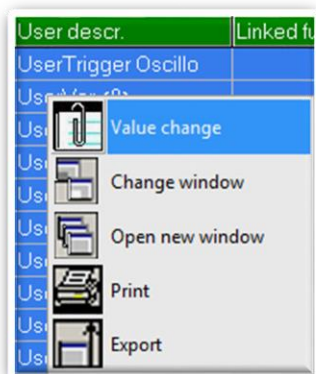


Insert "**Start Overcurrent Element**" into box and press "OK":


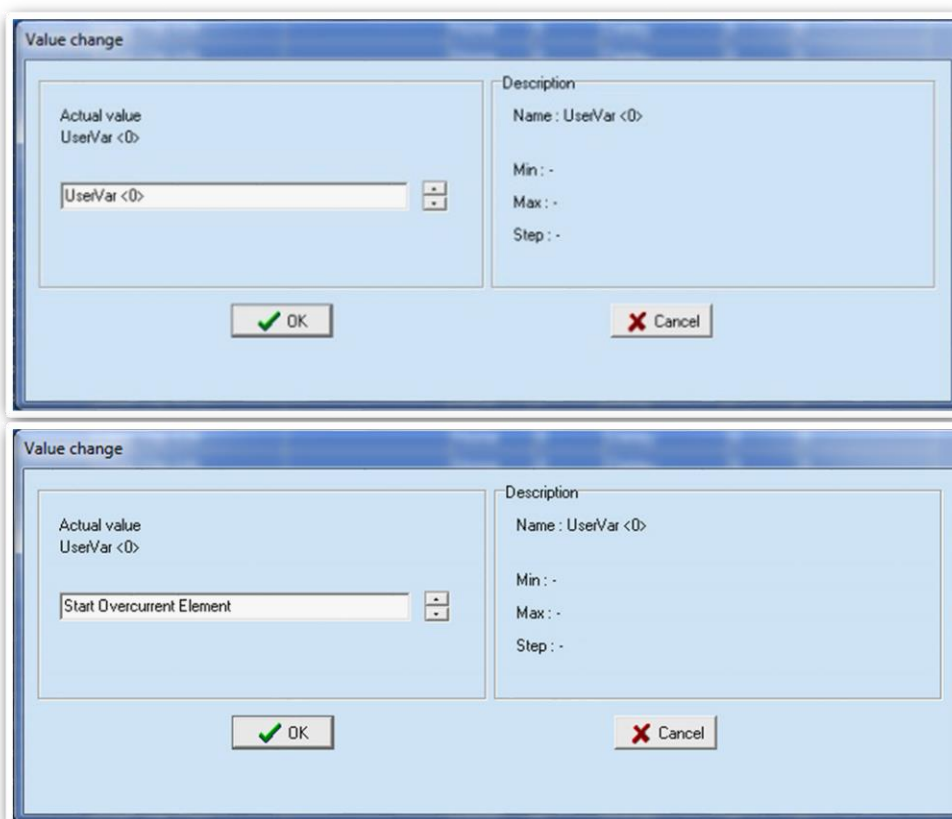


19.2.8.2 - "Linked Functions"

Select "**Linked Functions**" related to "UserVar<0>" ("**Start Overcurrent Element**") and press right button on mouse, select "Value change":





Select "**1I>, 2I>, 3I>**" from "Available" box via push-button "<Add", and press "OK".
For remove functions, use push-button ">Remove".

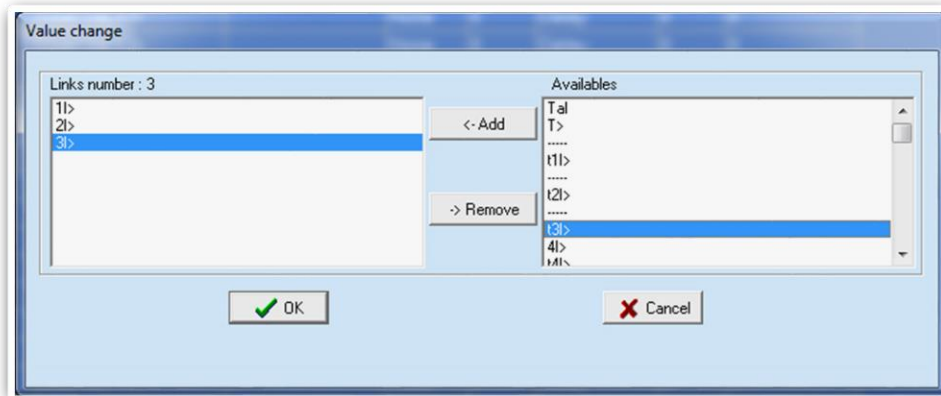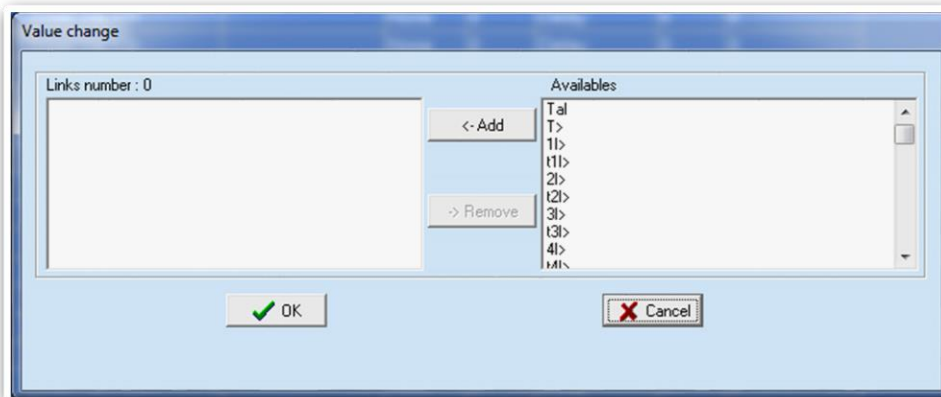

19.2.8.3 - "Operation Logic" (Oplogic)


Select "**Oper Logic**" related to "UserVar<0> ("**Start Overcurrent Element**")" and press right button on mouse, select "Value change":

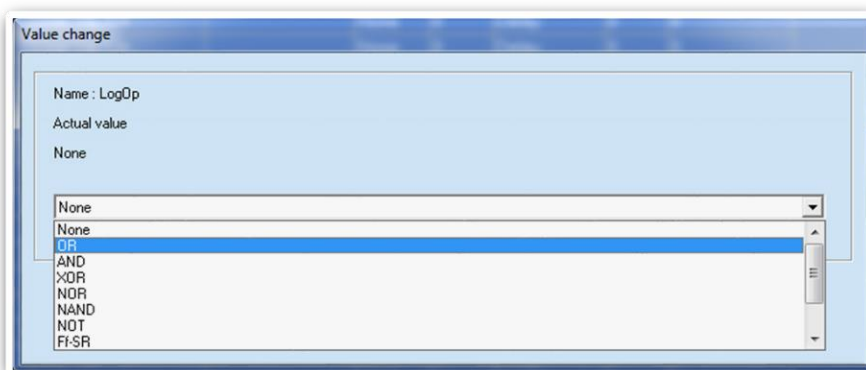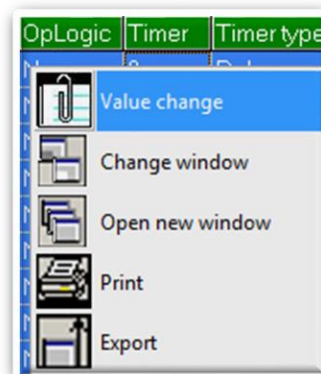


Insert "**OR**" into box and press "OK":

19.2.8.4 - "Timer"

Select "**Timer**" related to "UserVar<0> ("**Start Overcurrent Element**")" and press right button on mouse, select "Value change":

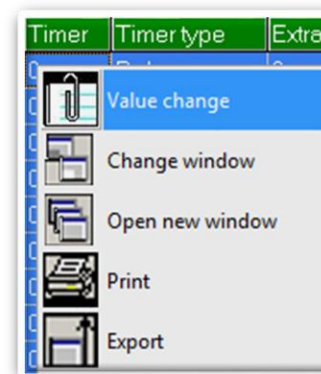


Select "**1**" into box and press "OK":

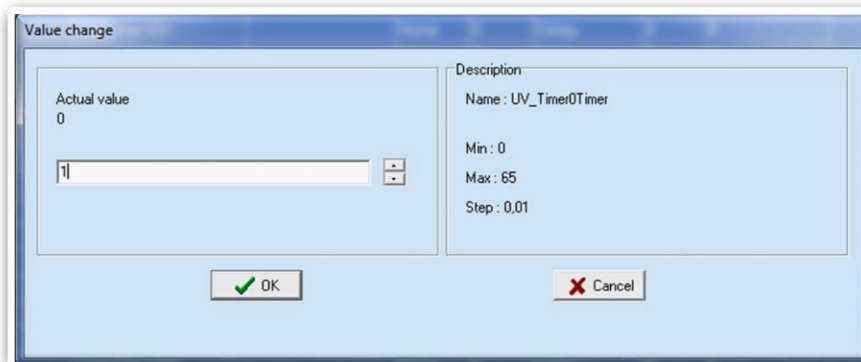


19.2.8.5 - "Timer type"

Select "**Timer**" related to "UserVar<0>" ("**Start Overcurrent Element**") and press right button on mouse, select "Value change":




Select "**Monostable**" into box and press "OK":

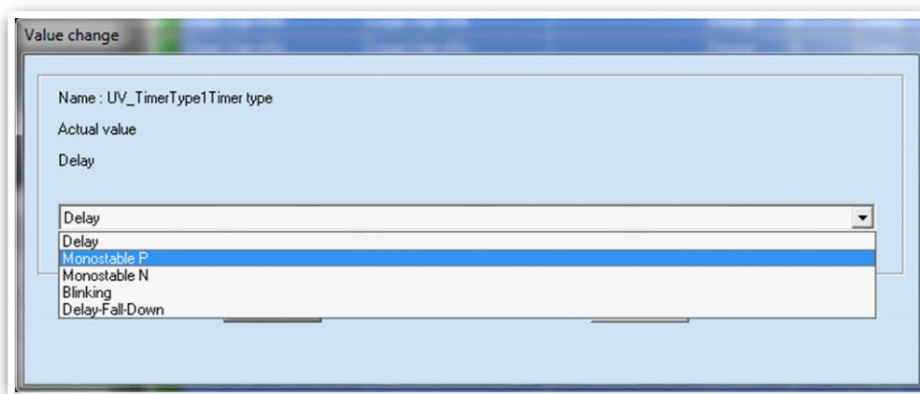

20. Date and Time

In this menu it is possible to configure the Date and Time

1



• Press "Tue 15 12:37 Dec 09, 2012" for access to the "Date and Time" menu.

2



Feb 23 2011

Through this control is possible change the system "Date"

Feb
23
2011

To change month

To change day

To change year

HH MM SS
15 33 06

Through this control is possible change the system "Time"

HH
15
MM
33
SS
06

To change hours

To change minutes

To change seconds



Confirm



Exit

20.1- Clock synchronization

The internal clock has 1ms resolution and a stability of ± 35 ppm in the operational temperature range.

It can be synchronized with an external time reference in the following ways:


- ❑ Using the "MCom2" software or from the DCS with the Modbus RTU protocol.

Note: On power supply failure an internal battery supports the internal clock for over two years.

21. Healthy (Diagnostic Information)

The relay operates a continuous checking of the vital functionalities and in case an internal failure is detected, the I.R.F. function (see § I.R.F.) is activated.

1



• Press " " to access to the "Desktop" menu with icons.

2



• Press " " to access.


3



• In this menu is showed the status of device.

IPU Board		No IPU error		IPU faulty
DSP Board		No DSP error		DSP faulty
Touch Screen		No Touch Screen error		Touch Screen faulty
I/O Board		No I/O error		I/O faulty
Firmware		Firmware Ok		Firmware compatibility fault

1



In Home page, is present an Icon Healthy. This icon shows the status of the device.



No device error.



Faulty.
Press to go the Healthy page.

If an internal self-expire (transient) fault is detected, it is recorded into an historical file without any other action.

For any repair please ask the Manufacturer or its authorized Dealers.

22. Info (Device Information)

In this menu it is possible to read the information relevant to relay unit.

	Line identification label.	(1)
	Build identification label.	(1)
	Relay Serial Number	Not modifiable
	Protection Type	Not modifiable




(1) This information can only be modified by the interface program "MSCom2"

23. FW Version (Firmware Version)

In this menu it is possible to read the information relevant to relay firmware.

1



- Press “” to access to the “Desktop” menu with icons.

2



- Press “” to next page.

3



- Press “” to access.

4



- In this menu is showed the information of device.

Type Relay		Type Relay	U-MLE-PLv-TS
IPU		Firmware number	0823.34.01.x
DSP		Firmware number	019.01.A
Touch Screen		Firmware number	823.07.01

24. Software Application



Application Software

MSCom 2 1.03.51 or later

25. Display Cal. (Display Calibration)

In this menu it is possible to recalibrate the Display Touch.


In case the Display is out of calibration, press the pushbuttons    at the same time for 2" to access the calibration procedure (start at point 4).

- | | | | |
|--|--|---|--|
| 1  | <ul style="list-style-type: none"> Press "" for access to the "Desktop" menu with icons. | 2  | <ul style="list-style-type: none"> Press "" for next page. |
| 3  | <ul style="list-style-type: none"> Press "" to calibration. | 4  | <ul style="list-style-type: none"> Touch to continue. |
| 5  | <ul style="list-style-type: none"> 3 Touches Right-up. | 6  | <ul style="list-style-type: none"> 3 Touches Left-up. |
| 7  | <ul style="list-style-type: none"> 3 Touches Middle point down. | 8  | <ul style="list-style-type: none"> Calibration Done. |


25.1 – Set Default Calibration Touch Panel (via software MCom2)

Insert USB cable in the front face connector.


Open “MCom2” software:




Select “**Tools**” on main menu:

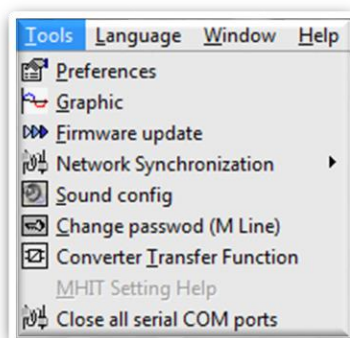

Select “**Firmware update**” on main menu:



Press “**Force Touch calibration**”:

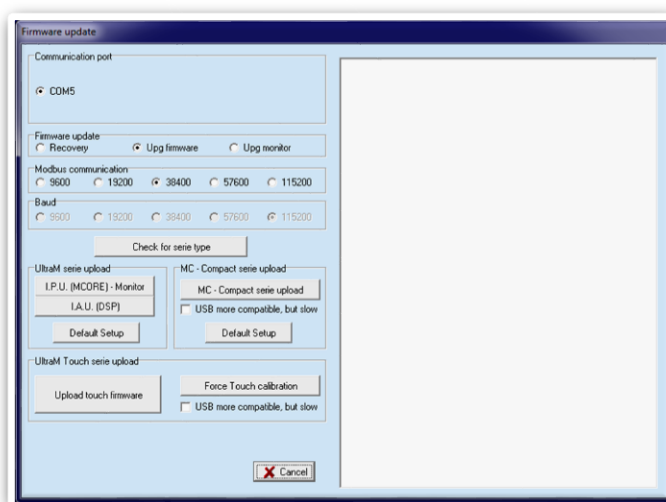


26. Battery


The relay is equipped with a lithium battery type "**CR2477N 3V**", to support the internal clock and the oscillographic recording memory in case of programmed lack of power. The expected minimum duration without power exceed 2 years.

ATTENTION!! Use only battery specified.

Instruction for replacement the battery:

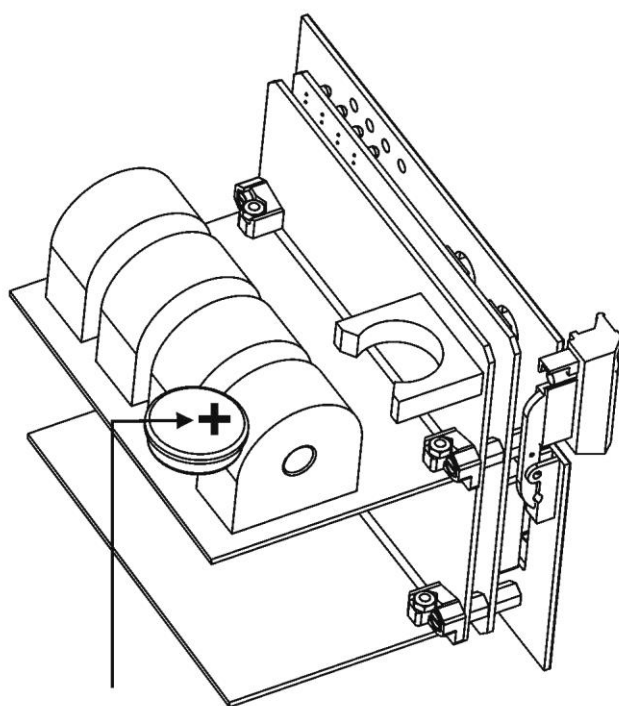

BATTERY

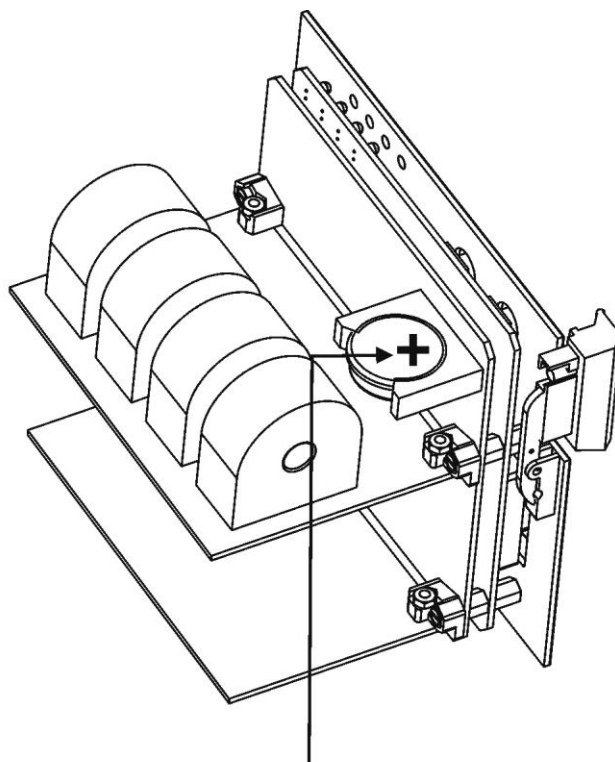

BATTERY


27. Maintenance

No maintenance is required. In case of malfunctioning please contact Microelettrica Scientifica Service or the local Authorized Dealer mentioning the relay's Serial No reported in the label on relays enclosure.


28. Power Frequency Insulation Test

Every relay individually undergoes a factory insulation test according to IEC255-5 standard at 2 kV, 50 Hz 1min. Insulation test should not be repeated as it uselessly stresses the dielectrics. When doing the insulation test, the terminals relevant to serial output, digital inputs and RTD input must always be short circuited to ground. When relays are mounted in switchboards or relay boards that have to undergo the insulation tests, the relay should be isolated. This is extremely important as discharges eventually tacking place in other parts or components of the board can severely damage the relays or cause damages not immediately evident to the electronic components.


29. Wiring Diagram

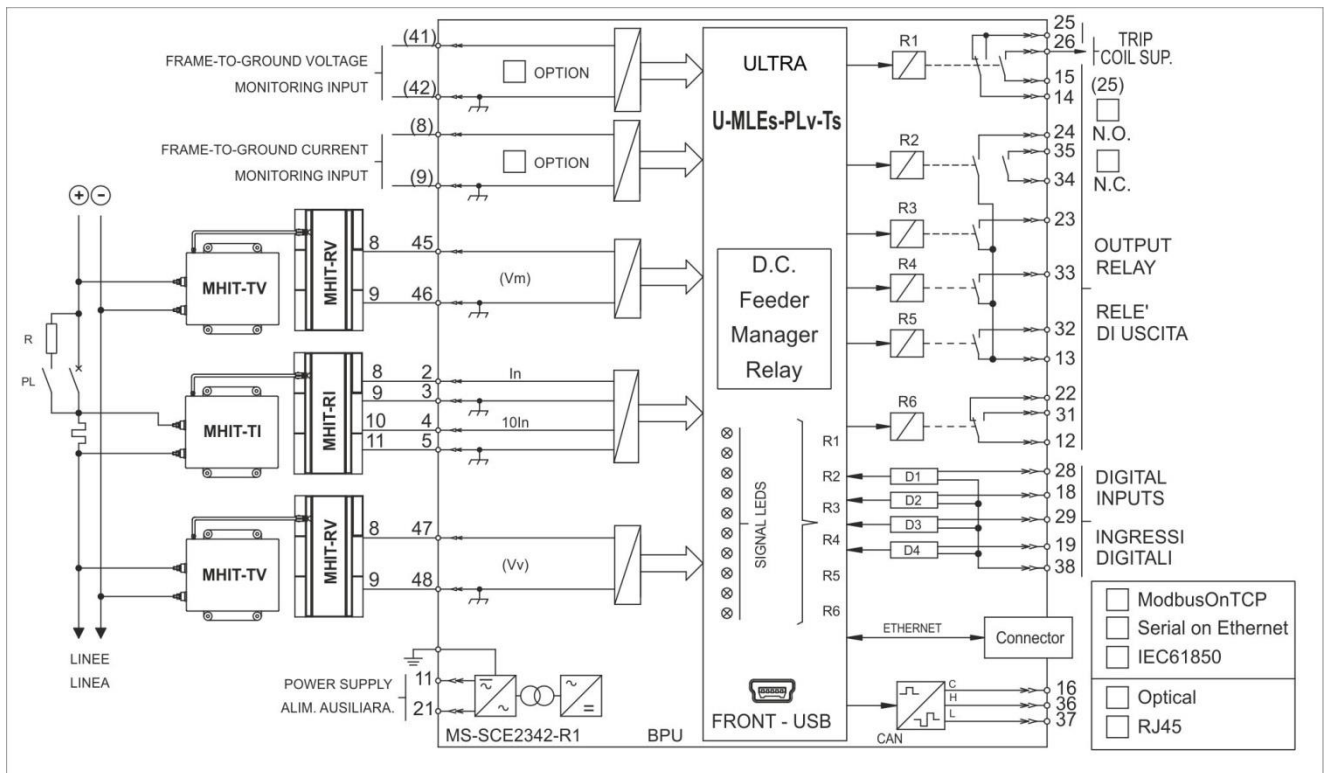


29.1 - UX10-4 - Expansion Module - Wiring Diagram (10 Digital Inputs + 4 Output Relays)

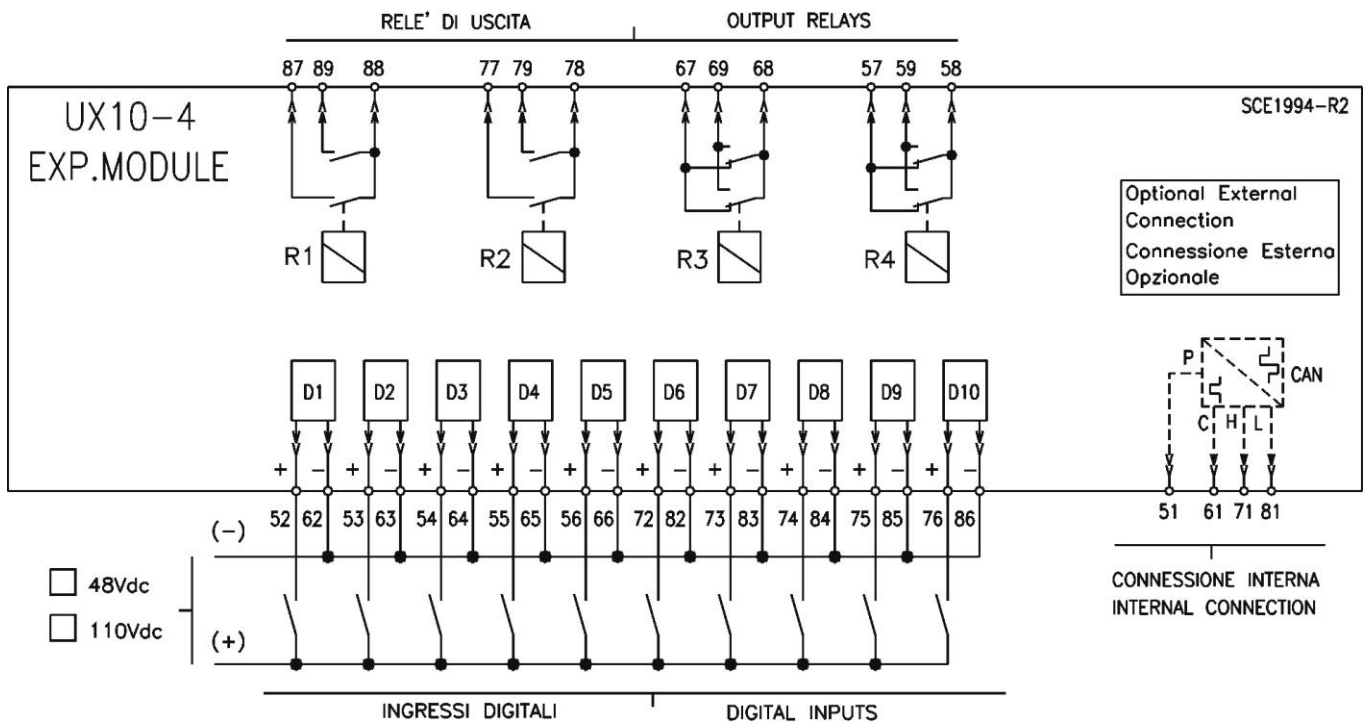


29.2 - **14DO** - Expansion Module - Wiring Diagram (14 Output Relays)

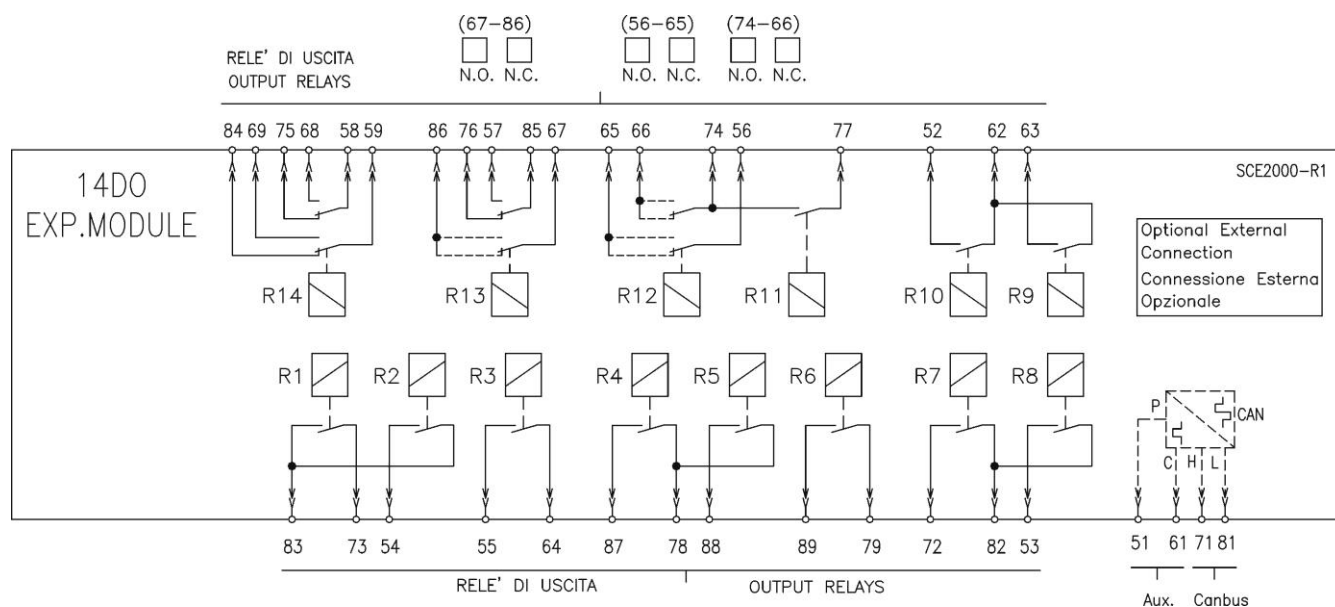

29.3 - **14DI** - Expansion Module - Wiring Diagram (14 Digital Inputs)

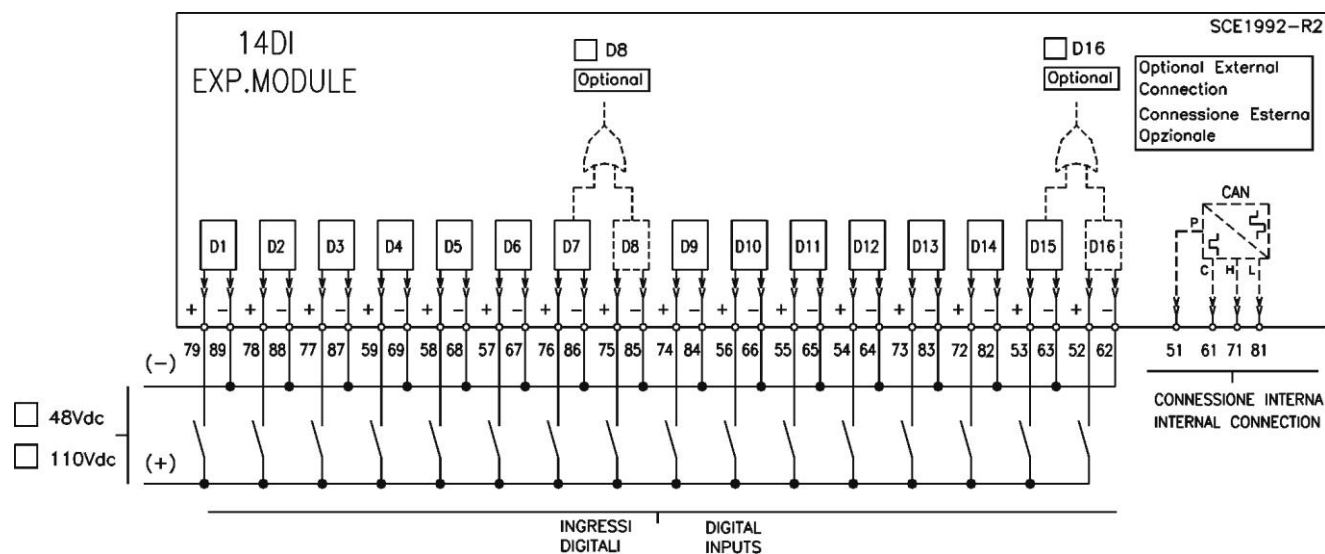

30. Overall Dimensions

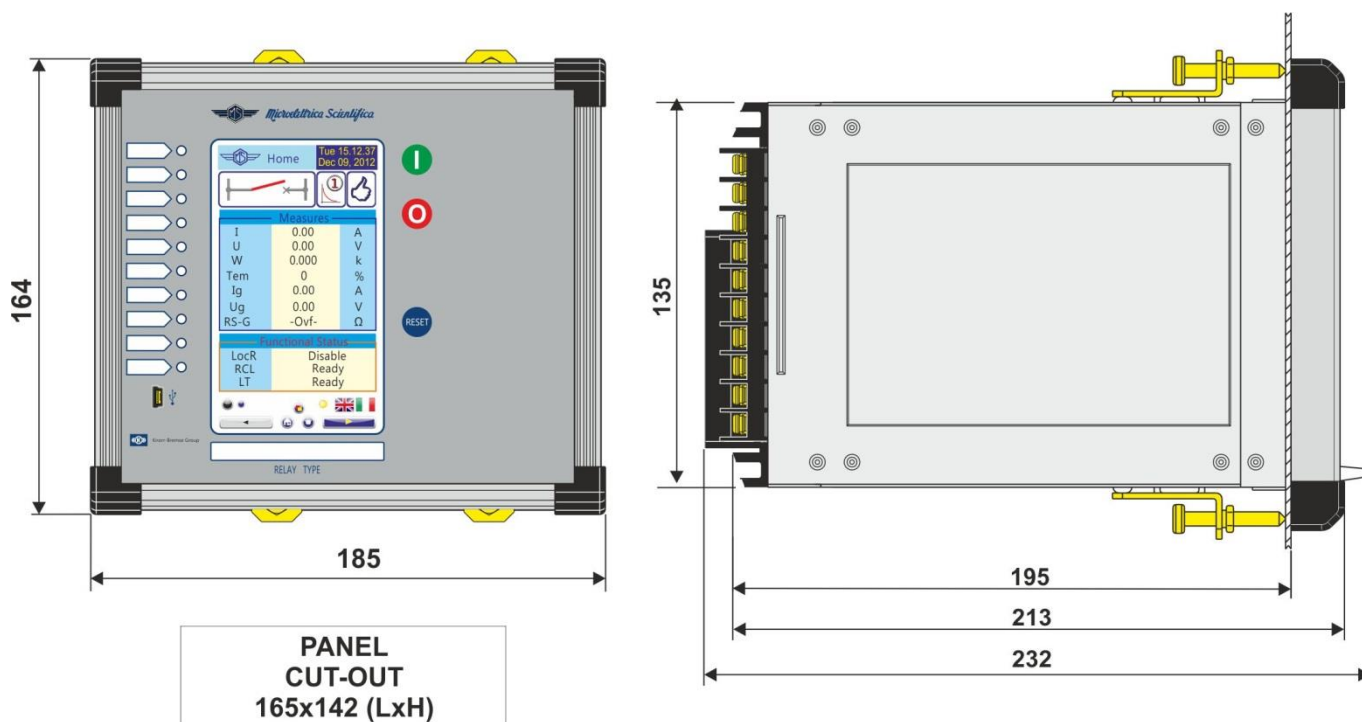

31. Electrical Characteristics

APPROVAL: CE

REFERENCE STANDARDS IEC 60255 - EN50263 - CE Directive - EN/IEC61000 - IEEE C37

☐ Dielectric test voltage	IEC 60255-5	2kV, 50/60Hz, 1 min.
☐ Impulse test voltage	IEC 60255-5	5kV (c.m.), 2kV (d.m.) – 1,2/50µs
☐ Insulation resistance	> 100MΩ	

Environmental Std. Ref. (IEC 60068)

☐ Operation ambient temperature	-10°C / +55°C
☐ Storage temperature	-25°C / +70°C
☐ Environmental testing (Cold)	IEC60068-2-1
(Dry heat)	IEC60068-2-2
(Change of temperature)	IEC60068-2-14
(Damp heat, steady state)	IEC60068-2-78 RH 93% Without Condensing AT 40°C

CE EMC Compatibility (EN50081-2 - EN50082-2 - EN50263)

☐ Electromagnetic emission	EN55022	industrial environment
☐ Radiated electromagnetic field immunity test	IEC61000-4-3	level 3 80-2000MHz 10V/m
	ENV50204	900MHz/200Hz 10V/m
☐ Conducted disturbances immunity test	IEC61000-4-6	level 3 0.15-80MHz 10V
☐ Electrostatic discharge test	IEC61000-4-2	level 4 6kV contact / 8kV air
☐ Power frequency magnetic test	IEC61000-4-8	1000A/m 50/60Hz
☐ Pulse magnetic field	IEC61000-4-9	1000A/m, 8/20µs
☐ Damped oscillatory magnetic field	IEC61000-4-10	100A/m, 0.1-1MHz
☐ Immunity to conducted common mode disturbance 0Hz-150KHz	IEC61000-4-16	level 4
☐ Electrical fast transient/burst	IEC61000-4-4	level 3 2kV, 5kHz
☐ HF disturbance test with damped oscillatory wave (1MHz burst test)	IEC60255-22-1	class 3 400pps, 2,5kV (m.c.), 1kV (d.m.)
☐ Oscillatory waves (Ring waves)	IEC61000-4-12	level 4 4kV(c.m.), 2kV(d.m.)
☐ Surge immunity test	IEC61000-4-5	level 4 2kV(c.m.), 1kV(d.m.)
☐ Voltage interruptions	IEC60255-4-11	
☐ Resistance to vibration and shocks	IEC60255-21-1 - IEC60255-21-2	10-500Hz 1g

ELECTRIC RATED VALUE

☐ Accuracy at reference value of influencing factors	1% In 2% + to (to=20÷30ms @ 2xIs)	for measure for times
☐ Rated Current	0 - ±20mA (±40) ≡ 0 - In (2In)	
☐ Rated Voltage	0 - 20mA (40) ≡ 0 - Vn (2Vn)	
☐ Average power supply consumption	< 10 VA	
☐ Output relays	rating 5 A; Vn = 380 V A.C. resistive switching = 1100W (380V max) make = 30 A (peak) 0,5 sec. break = 0.3 A, 110 Vcc, L/R = 40 ms (100.000 op.)	

COMMUNICATION PARAMETER

☐ Front port	USB (Modbus RTU)
☐ Rear port (Terminal Block)	RS485 – 9600 to 38400 bps – 8,n,1 (Modbus RTU or IEC103)
☐ Rear port (Ethernet)	RJ45 (ModOnTCP or SerialOnEth) IP Address : 192.168.0.100 default, modifiable by MCom2 program

Microelettrica Scientifica S.p.A. - 20090 Buccinasco (MI) - Italy - Via Lucania, 2
Tel. (+39) 02 575731-Fax (+39) 02 57510940
<http://www.microelettrica.com> e-mail : <mailto:sales.relays@microelettrica.com>

The performances and the characteristics reported in this manual are not binding and can modified at any moment without notice