



D.C. MEASURING CONVERTER

TYPE

“MLIT-V”

OPERATION MANUAL





1. General Utilization and Commissioning Directions	3
1.1 - Storage and Transportation	3
1.2 - Installation	3
1.3 - Electrical Connection	3
1.4 - Measuring Inputs and Power Supply	3
1.5 - Outputs Loading	3
1.6 - Protection Earthing	3
1.8 - Safety Protection	3
1.9 - Handling	3
1.10 - Maintenance	3
1.11 - Waste Disposal of Electrical & Electronic Equipment	4
1.12 - Fault Detection and Repair	4
2. General Characteristics	4
2.1 - Auxiliary Supply	4
3. Diagnostic	4
4. Wiring Diagram - MLIT-V	5
5. Wiring Diagram	5
6. Overall Dimensions	6
7. Electrical Characteristics	7



1. General Utilization and Commissioning Directions

1.1 - Storage and Transportation

Must comply with the environmental conditions stated in the product's specification or by the applicable IEC standards.

1.2 - Installation

Must be properly made and in compliance with the operational ambient conditions stated by the Manufacturer.

1.3 - Electrical Connection

Must be made strictly according to the wiring diagram supplied with the Product, to its electrical characteristics and in compliance with the applicable standards particularly with reference to human safety.

1.4 - Measuring Inputs and Power Supply

Carefully check that the value of input quantities and power supply voltage are proper and within the permissible variation limits.

1.5 - Outputs Loading

Must be compatible with their declared performance.

1.6 - Protection Earthing

When earthing is required, carefully check its effectiveness.

1.8 - Safety Protection

Carefully check that all safety means are correctly mounted, apply proper seals where required and periodically check their integrity.

1.9 - Handling

Notwithstanding the highest practicable protection means used in designing M.S. electronic circuits, the electronic components and semiconductor devices mounted on the modules can be seriously damaged by electrostatic voltage discharge which can be experienced when handling the modules.

The damage caused by electrostatic discharge may not be immediately apparent but the design reliability and the long life of the product will have been reduced. The electronic circuits produced by M.S. are completely safe from electrostatic discharge (8 KV IEC 255.22.2) when housed in their case; dismounting the modules without proper cautions expose them to the risk of damage.

1.10 - Maintenance

Make reference to the instruction manual of the Manufacturer; maintenance must be carried-out by specially trained people and in strict conformity with the safety regulations.



1.11 - Waste Disposal of Electrical & Electronic Equipment

(Applicable throughout the European Union and other European countries with separate collection program). This product should not be treated as household waste when you wish dispose of it. Instead, it should be handed over to an applicable collection point for the recycling of electrical and electronic equipment. By ensuring this product is disposed of correctly, you will help prevent potential negative consequence to the environment and human health, which could otherwise be caused by inappropriate disposal of this product. The recycling of materials will help to conserve natural resource.

1.12 - Fault Detection and Repair

Internal calibrations and components should not be altered or replaced.
For repair, please ask the Manufacturer or its authorized Dealers.

Misapplication of the above warnings and instruction relieves the Manufacturer of any liability.

2. General Characteristics

The MLIT-V converters provide a measurement voltage fully isolated and safety

Converter, connected to the system, acquires input value, and convert it in an current output: (0 ÷ 20)mA with full diagnostic capability.

The input is design to be conneted to a thermocouple (-20mV ÷ +20mV)

Make electric connection in conformity with the diagram reported on transducer enclosure.
The auxiliary power is supplied by a built-in module fully isolated and self protected.

2.1 - Auxiliary Supply

The auxiliary power is supplied by a built-in module fully isolated an self protected.

a) - 48(-20%) ÷ 132(+15%)Vdc (classe DC3) - 48(-15%) ÷ 110(+10%)Vaca (classe AC2)

Before energising the unit check that supply voltage is within the allowed limits.


3. Diagnostic

Diagnostic alarm relay (normally energized) reports:


Output contact	<i>Closed</i>	= Normal operation
	<i>Open</i>	= Internal malfunction or failure auxiliary power. Or at least the non-operation of the converter

In case of internal fault contact Microelettrica Scientifica or its authorized reseller.


4. Wiring Diagram - MLIT-V

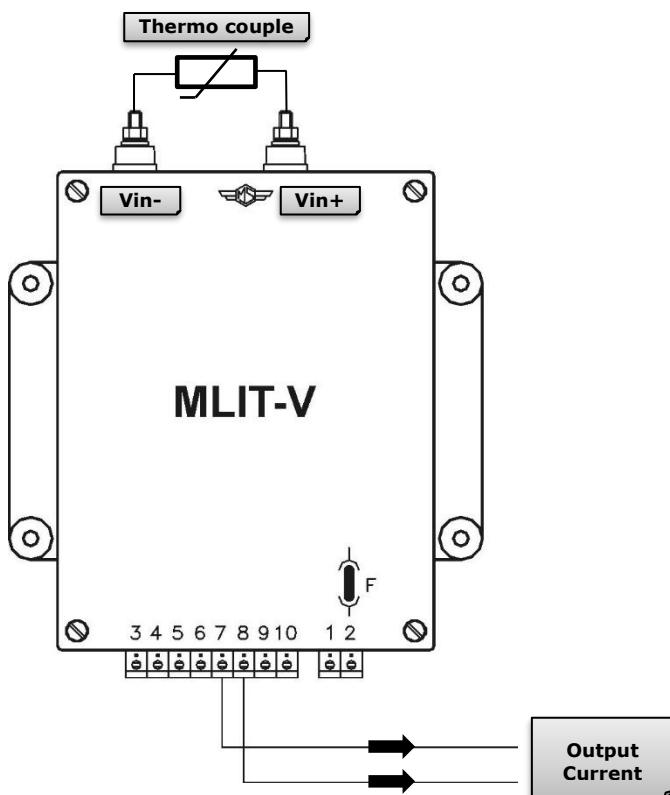

5. Wiring Diagram

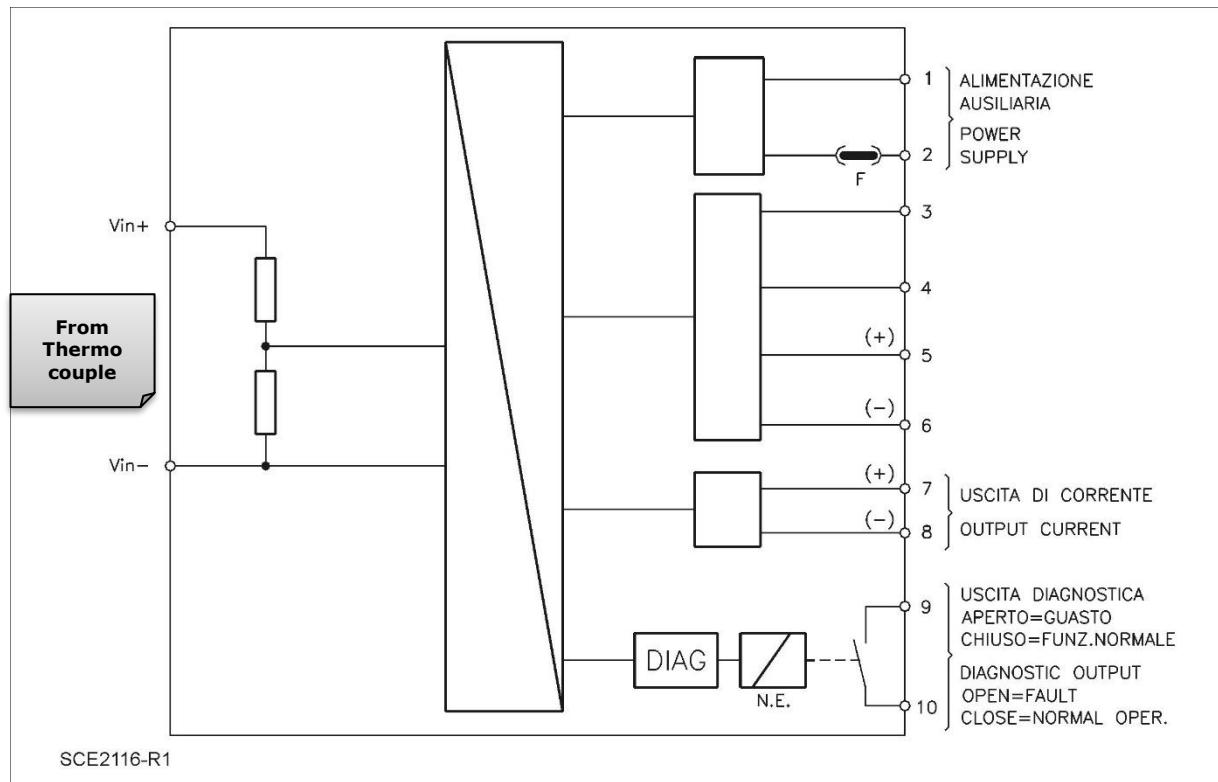

6. Overall Dimensions

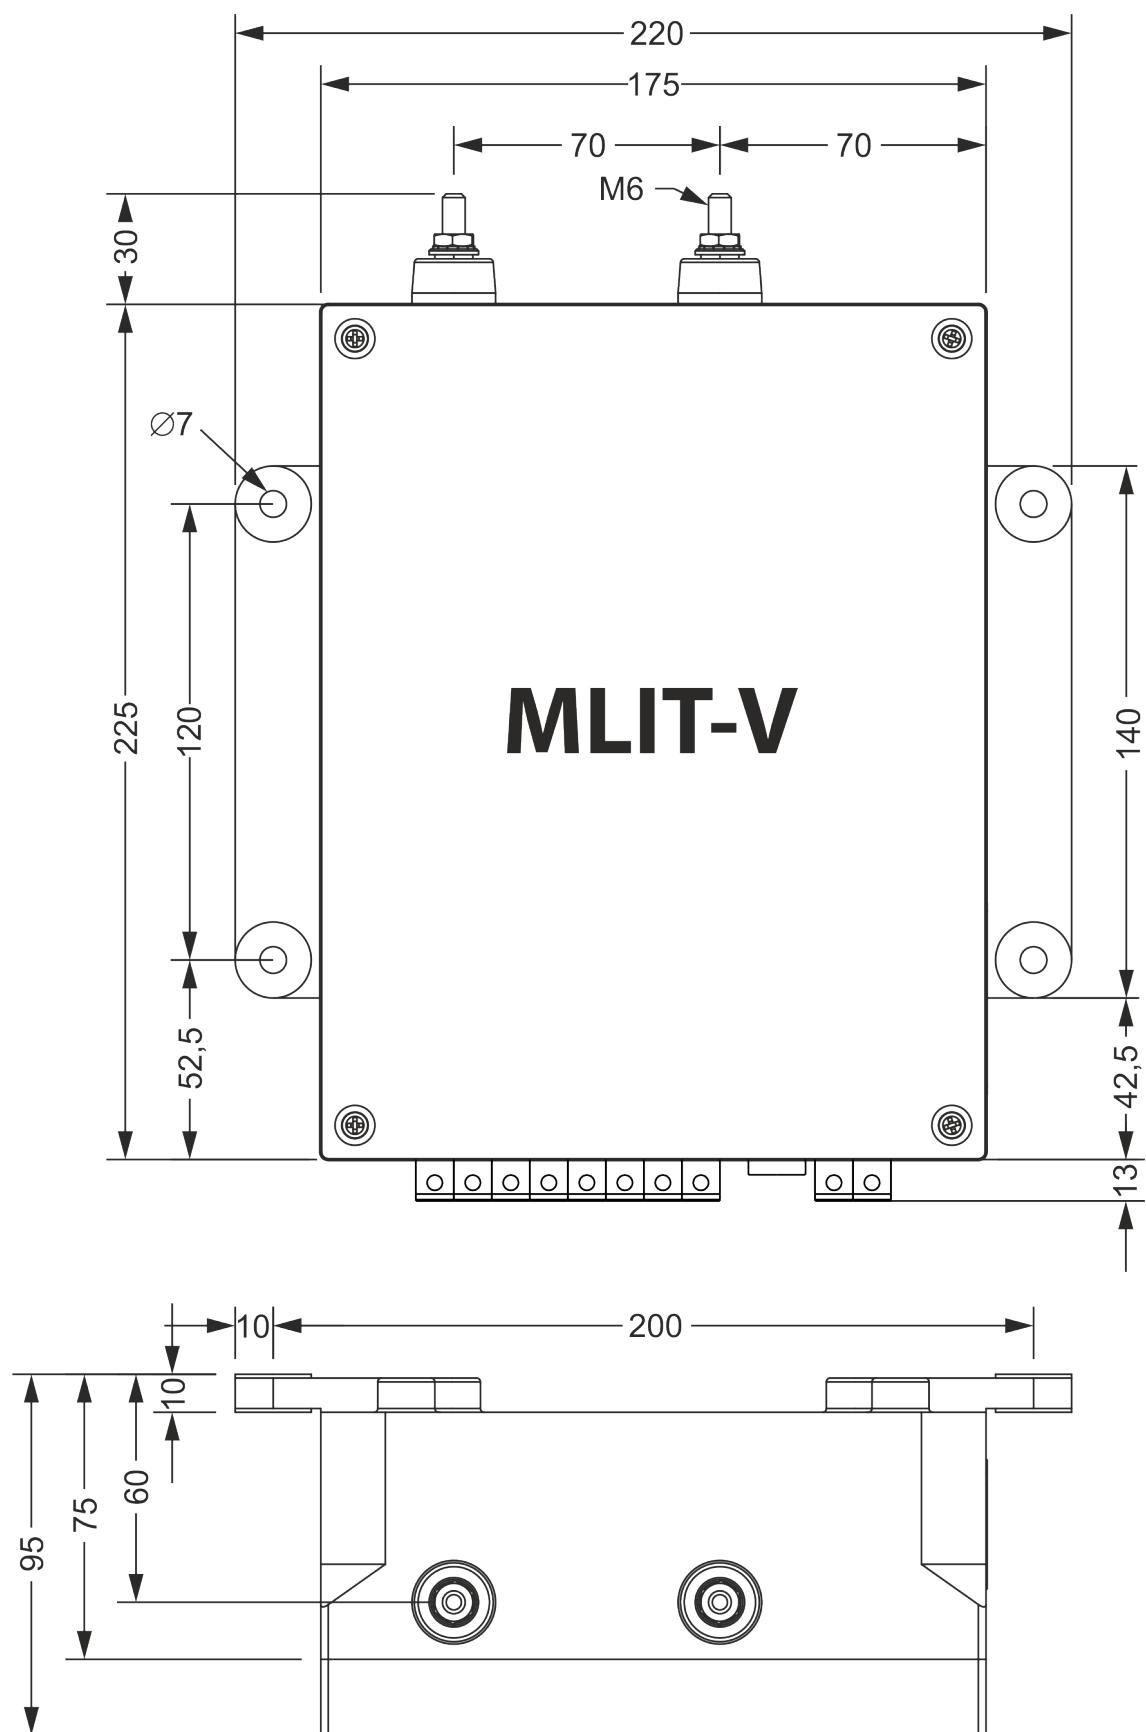

7. Electrical Characteristics

Reference Standard CE Directive - EN/IEC61000 - EN60870-2-1 - RFI.DMA/IM.LA/SSE.360

Dielectric test voltage	IEC60255-5	18.5kV, 50/60Hz, 1 min.
Impulse test voltage	IEC60255-5	40kV (c.m.), 20kV (d.m.) - 1,2/50 μ s
Insulation Resistance	> 100M Ω	

Environmental Ref.Std. (IEC 68-2-1 - 68-2-2 - 68-2-33 - 60870-2-2)

Operation ambient temperature	EN 60870-2-2	-10 °C / +55 °C
Storage temperature		-25°C / +70°C
Environmental testing (Cold)	IEC 60068-2-1	
(Dry heat)	IEC 60068-2-2	
(Change of temperature)	IEC 60068-2-14	
(Damp heat, steady state)	IEC 60068-2-78	RH 95% Without Condensing AT 40°C
Operative conditions	EN60870-2-2 Class C1 (3k5)	
Resistance to vibration and shock (bump-shock)		
Sismatic stress resistance		

CE EMC Compatibility (EN61000-6-2 - EN61000-6-4 - EN50263)

Electromagnetic emission	EN 55011	30-1000 MHz	
Conducted disturbances immunity test	EN 55022	level 3	0.15-80 MHz
Radiated electromagnetic field immunity test	IEC 61000-4-3	level 3	80-2000 MHz
	ENV50140		900 MHz/200 Hz
Electrostatic discharge test	IEC 61000-4-2	level 3	6 kV contact / 8 kV air
Power frequency magnetic test	IEC 61000-4-8		100 A/m
Pulse magnetic field	IEC61000-4-9		1000A/m, 8/20 μ s
I Damped oscillatory magnetic field	IEC 61000-4-10		100 A/m, 0.1-1 MHz
Immunity to conducted common mode disturbance 0Hz-150KHz	IEC61000-4-16	level 4	
Electrical fast transient/burst (Fast Trasient)	IEC 61000-4-4	level 4	2 kV, 5 kHz
HF disturbance test with damped oscillatory wave (1MHz burst test)	IEC60255-22-1	class 3	400pps, 2,5kV (m.c.), 1kV (d.m.)
Surge immunity test	IEC 61000-4-5	level 4	2 kV(m.c.), 1 kV(d.m.)
Voltage interruptions	IEC 61000-4-11		20 ms
Resistance to vibration and shock	IEC60255-21-1		10-500Hz
	IEC60255-21-2		1g

Characteristics

Accuracy at reference value of influencing factors	Class 0,5		
Power Supply	48(-20%) + 132(+15%)Vcc (class DC3) 48(-15%) + 110(+10%)Vca (class AC2)		EN60870-2-1
Average power supply consumption	≤ 7 VA		
Sampling frequency	5kHz		
Rated Voltage	650V		
Input impedance	22M Ω		
Measurements dynamic	(-20 \div +20)mV		
Outputs	(0 \div 20)mA = (-20 \div +20)mV		
Maximum burder	500 Ω		
A.C. test characteristics	c.a. = 250Vca \pm 20% (maximum current 1mA)		
D.C. test characteristics	c.c. = 300Vcc \pm 20% (maximum current 1mA)		
Output relays	rating 6 A; Vn = 250 V A.C. resistive switching = 1500VA (400V max) make = 30 A (peak) 0,5 sec.; break = 0.2 A, 110 Vcc, L/R = 40 ms (100.000 op.) - Meccanichal life 10^6 op.		
Enclosure	Material: BMCR9 protection degree IP44		
Connections terminals	Bolt type terminals (M6) for inputs / Screw type 4mm ²		

This publication may be subject to alteration without prior notice. Therefore, a printed copy of this document may not be the latest revision. Please contact your local representative for the latest update. The trademarks MS Microelettrica Scientifica, Knorr and Knorr-Bremse as well as the figurative mark "K" are registered. Copyright © Knorr-Bremse AG and Microelettrica Scientifica SpA - all rights reserved, including industrial property rights application. Knorr-Bremse AG and Microelettrica Scientifica SpA retain any power of disposal, such as for copying and transferring.


MICROELETTRICA

20090 Buccinasco (MI) · Via Lucania 2 · Italy · Tel.: +39 02 575731
E-Mail: info@microelettrica.com · www.microelettrica.com